


HSF
Compliant



勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

Specifications

Current & Voltage Rating : 3A & 25Vac max.

Insulation Resistance : 5000 MΩ min.

Contact Resistance : 20 mΩ max.

Dielectric Withstanding : AC 500V

Operating Temperature : -25°C ~ +85°C (PBT)

-40°C ~ +105°C (NY6T)



Max. Processing Temp. : 245±5°C for 3~5 seconds (NY6T)

Contact Material : Brass

Insulator Material : PBT / Nylon-6T(H.F.), UL 94V-0(Black)

Finish : Gold plated overall


P1SACDxxGFxA18379000x

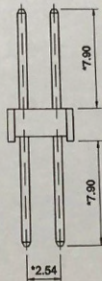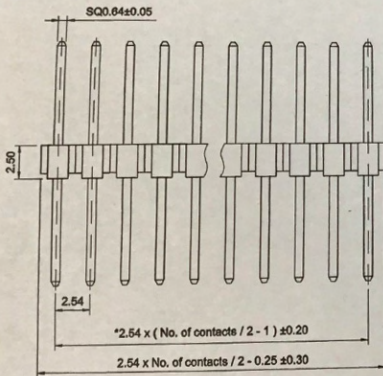

Packing :
B : Bag
V : Tray

Material
A : PBT + Brass
Y : Nylon-6T(H.F.) + Brass

No. of contacts

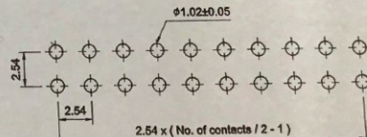

Recommended P.C.B. Layout

THIRD ANGLE PROJECTION	DESIGN UNITS	TITLE:	GENERAL TOLERANCES:	DRAWN	劉長明	DATE	2021/07/23
	mm □ INCH	2.54mm Pin Header Dual Rows, Straight Type	±0.30	CHECKED	陳世富	DATE	2021/07/23
SIZE:	SCALE:	SHEET:	PARTS NO.:	APPROVED	陳世富	DATE	2021/07/23
A4	FREE	1/1	P1SACDxxGFxA18379000x			DATE	2021/07/23
CPN:	DWG NO.:	REV.	JAWS-SOP-P1SA332				
DAN NO.: P11007-050		01					