


单排/双排多规格


2P/3P/4P/5P/6P/8P/10P/15P/18P

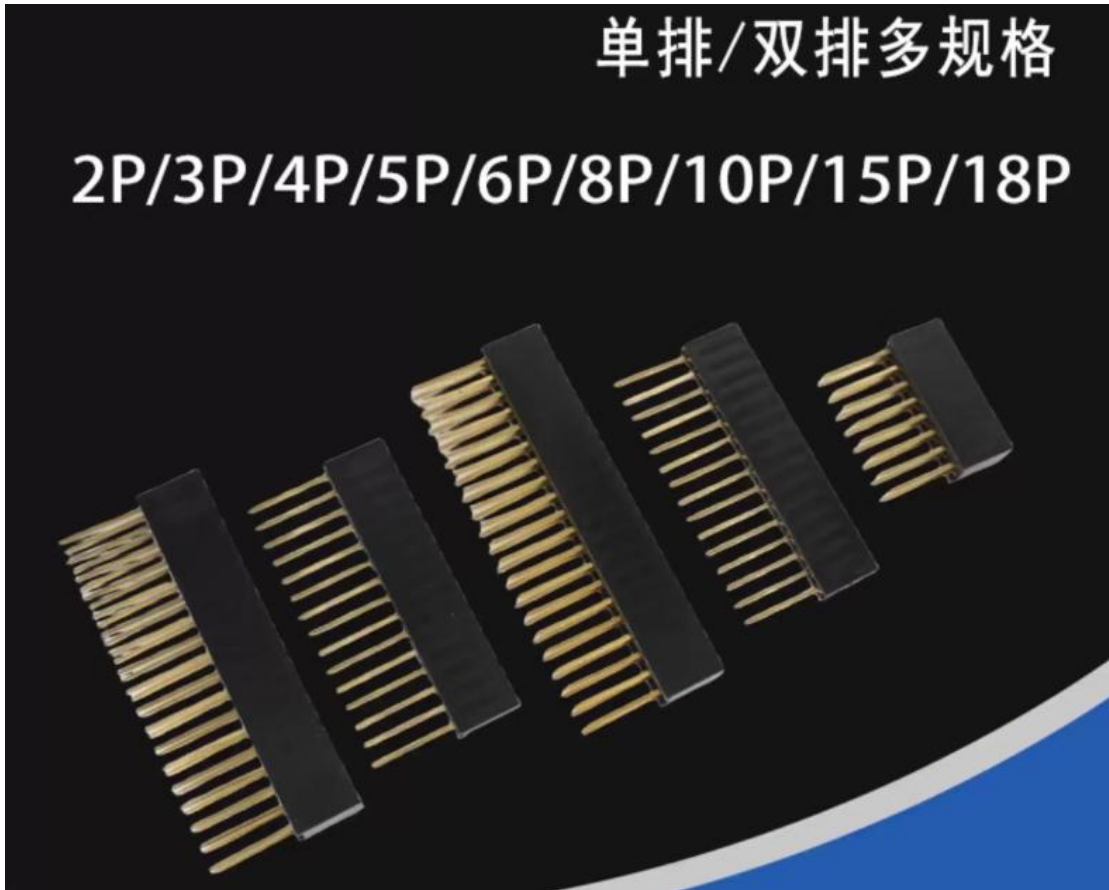

产品参数


- 【名称】：2.54MM加长单/双排母
- 【额定电流】：3AMPS
- 【使用温度】：-50℃~105℃
- 【介质耐压】：AC550V
- 【针数】：2~40P/位
- 【包装】：袋装
- 【引脚材质】：铜

产品尺寸图

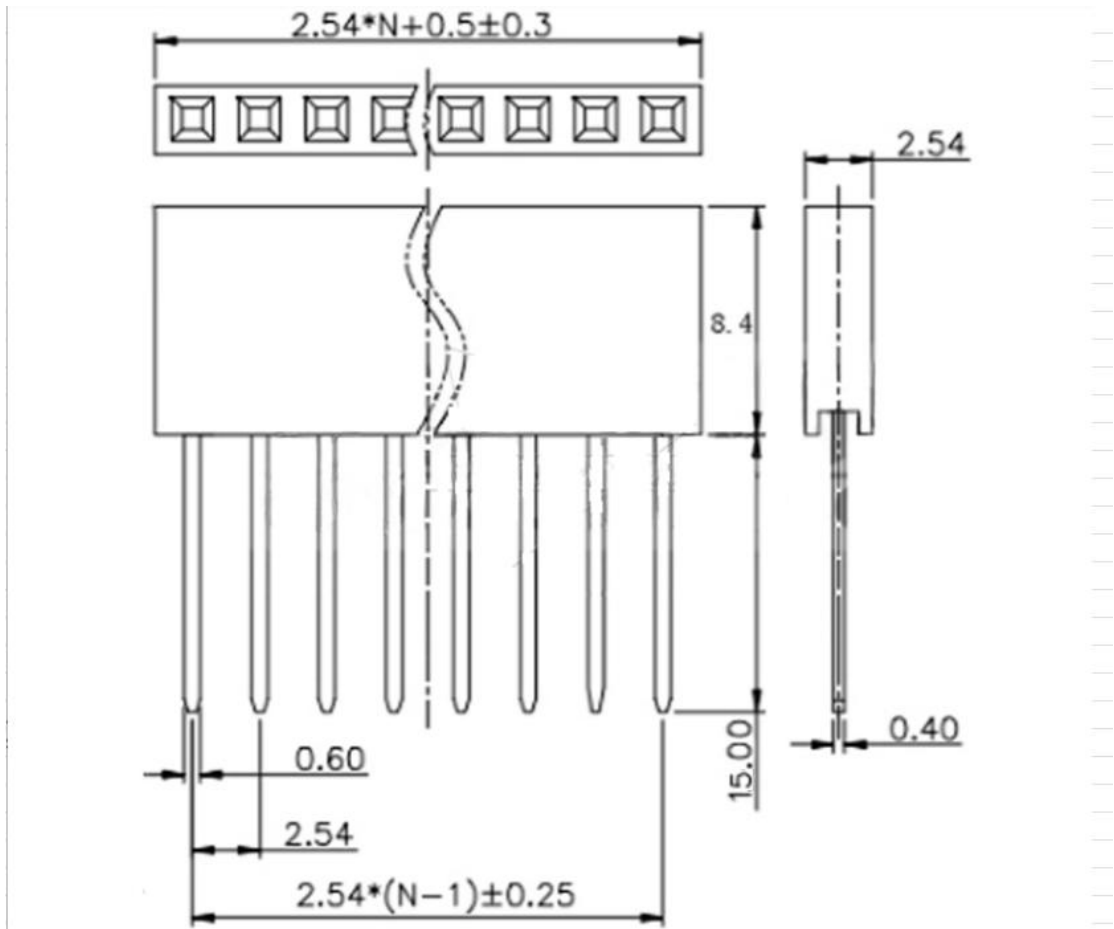

SPECIFICATIONS
Rated Current: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: Polyester (UL94V-0)
Standard: PBT
Max. Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

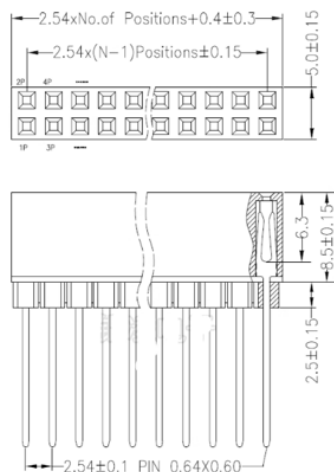

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

