

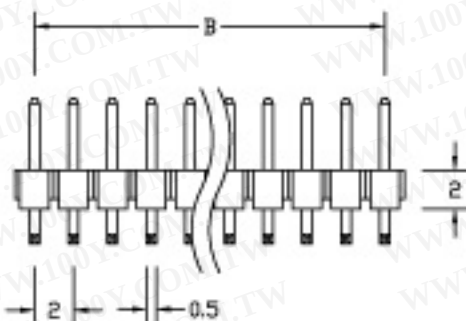


A=2.0XNo.of Positions
B=2.0XNo.of spaces

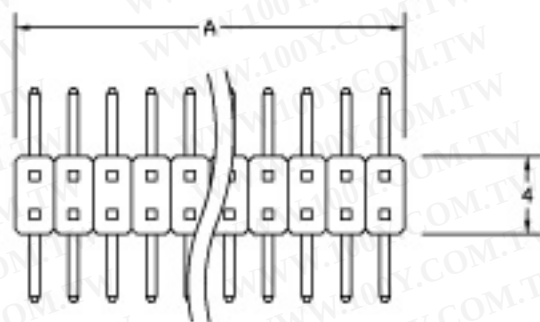

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



SPECIFICATIONS:

Material:

Insulator: Nylon, 9T rated UL94V-0

Insulator Color: Black

Contacts: Brass

Plating:

150" Gold flash over Nickel underplate on mating area,

Tin over Copper underplate on solder tail

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55° to +105°

Recommended soldering temp: 250° for 5-10 seconds