

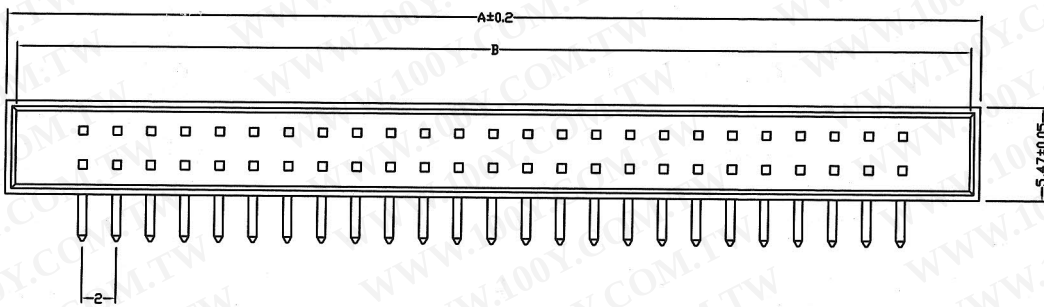


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

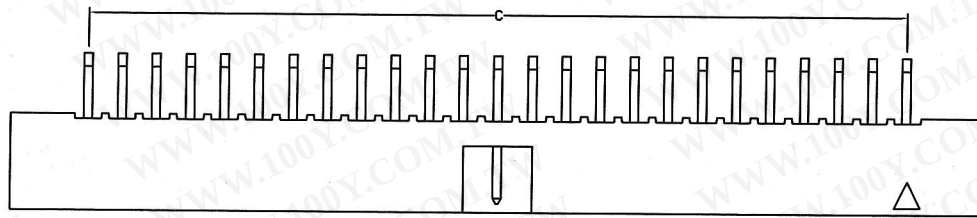


SEC B-B

SPECIFICATIONS:
 Material:
 Insulator: LYLON-6T
 Insulator color: Black
 Contacts: Brass
 Contact Plating:
 Gold Flash over Nickel underplate overall
Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 5,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC / minute
Mechanical:
 Mating durability: 500 cycles min
 Temperature Rating:
 Operating temperatures: -40° to +105°
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260° for 5 second

	A尺寸	B尺寸	C尺寸
6P	13.06	12.06	4.00
8P	15.06	14.06	6.00
10P	17.06	16.06	8.00
12P	19.06	18.06	10.00
14P	21.06	20.06	12.00
16P	23.06	22.06	14.00
20P	27.06	26.06	18.00
22P	29.06	28.06	20.00
24P	31.06	30.06	22.00
26P	33.06	32.06	24.00

	A尺寸	B尺寸	C尺寸
30P	37.06	36.06	28.00
32P	39.06	38.06	30.00
34P	41.06	40.06	32.00
36P	43.06	42.06	34.00
40P	47.06	46.06	38.00
44P	51.06	50.06	42.00
50P	57.06	56.06	48.00
60P	67.06	66.06	58.00
64P	71.06	70.06	62.00
68P	75.06	74.06	66.00

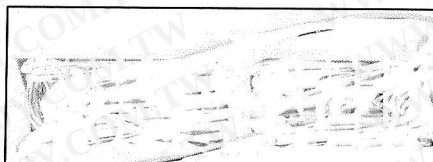

參考項目	數量	標題/名稱, 設計, 材質, 標註等	文庫編號/參考		
設計人 yulian	檢查人 XXX	審核人 - 日期 XXX - 00/00/00	檔名	日期 08/11/06	比例 X
			Edition 0		
			圖紙 1/1		