

DC/AC Power Inverter


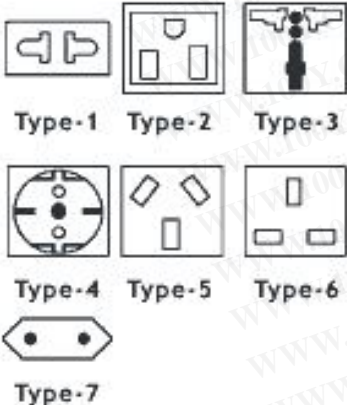

ONEUTTER

Modified Sine Wave - 1000Watt

DC to AC Power Inverter features:

- Compact Size, Light Weight & High Efficiency
- Low Battery Auto Shutdown
- Low Battery Alarm
- Overload and Short Circuit Protection
- Input Polarity Reverse Protection by Fuse
- High Surge Current Capacity. Easy to Start for TV, Motors & Other Inductive Load

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

	Model Number	KV - 1000
	Specifications	
	Voltage In	12 VDC (11 ~ 15VDC Range) 24 VDC (22 ~ 30VDC Range) 48 VDC (44 ~ 60VDC Range)
	Voltage Out	100V, 115V, 220V, 230V, 240VAC
<p>OUTPUT RECEPTACLES</p>  <p>Type-1 Type-2 Type-3</p> <p>Type-4 Type-5 Type-6</p> <p>Type-7</p>	Continuous Power	1000W
	Peak Power	2000W
	Output Frequency	50Hz or 60Hz
	No Load Current Draw	0.8A
	Efficiency	90%
	Fuse	30A x 3
	Weight	1.95 Kg
	Dimension	265 x 150 x 60mm (LxWxH)