





勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

产品规格书

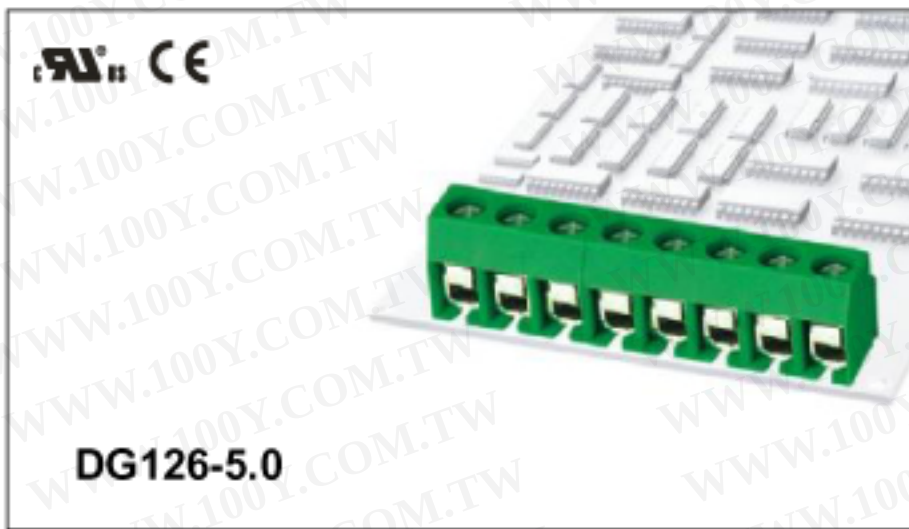


DG126-5.0

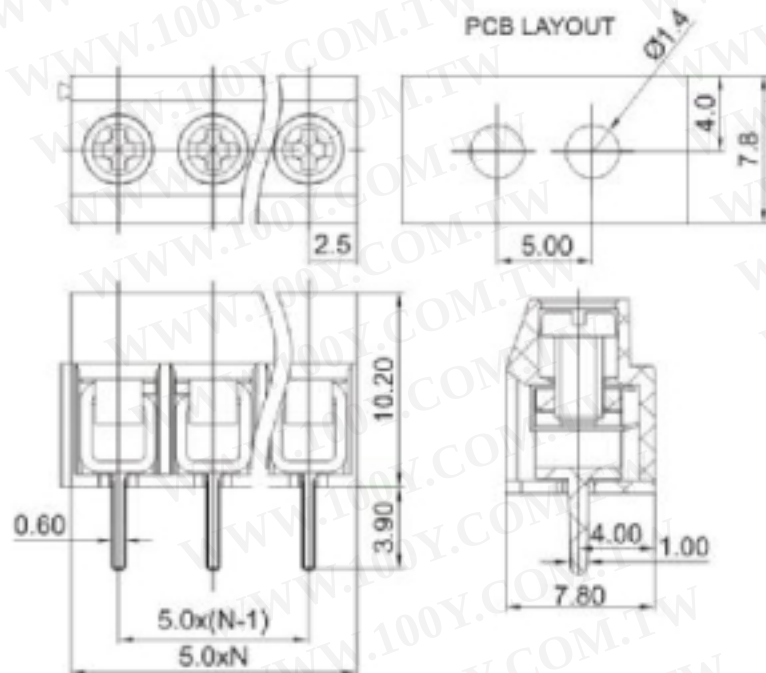

认证	UL	CE
电气性能		
参考标准	UL	IEC
额定电压	300V	250V
额定电流	10A	18A
使用线径	26-14AWG	0.5-2.5mm ²
耐电压	AC2000V/1Min	
机械性能		
扭力矩	0.4Nm(3.5Lb-In)	
温度范围	-40℃~+105℃	
剥线长度	6-7mm	
尺寸		
间距	5.0mm(.197")	
极数	2P,3P-24P	
材质和电镀		
塑件	PA66,UL94V-0	
螺丝	M2.5,钢,镀Cr ³⁺ 钝化彩锌	
焊针	黄铜,镀锡	
簧片	不锈钢	

订购方式:

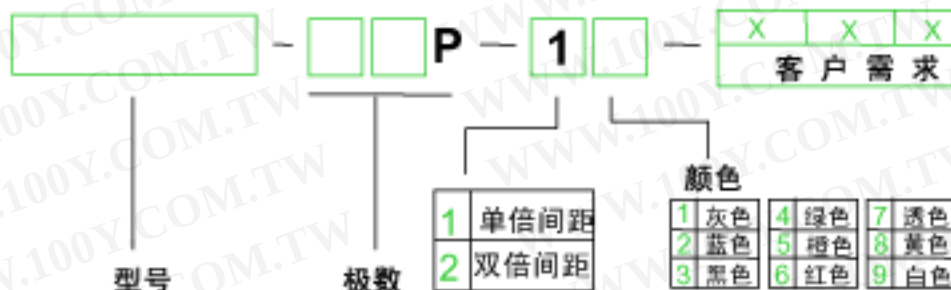

mm (INCH)	DEGSON®
THROANGLE PROJECTION	NAME DG126-5.0