



Headers(Sockets) for pluggable terminal blocks / ECH & EHD series

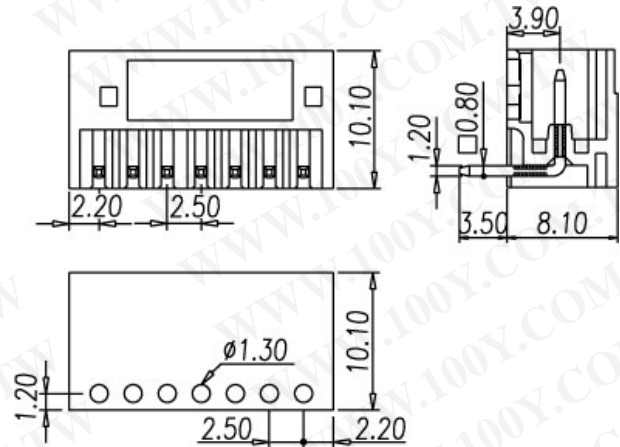

ECH250R

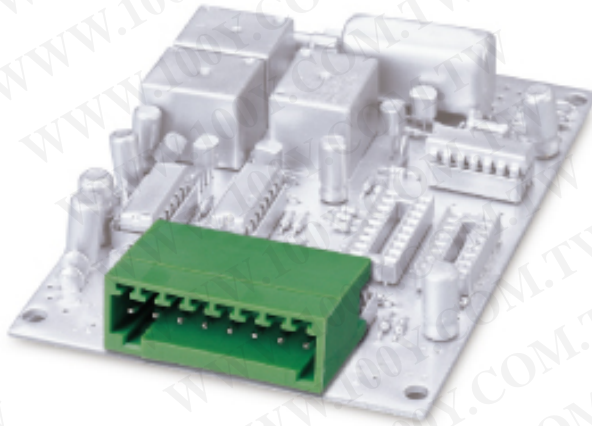

Pitch: 2.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	150V	130V
Rated current	4A	4A
Wire range		
Solid wire (AWG)		
Stranded wire (AWG/mm ²)		
Rated surge voltage (UL/IEC/Max.)	1.5 / 1.25 / KV	
Torque (Lb-in)		
Screw		
Wire strip length		
Pole	Cat. No.	
02	ECH250R-02P	
:	:	
:	:	
24	ECH250R-24P	