

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/11/23'	~	LJC 09/11/23'
B	ADD P/N CODE	LJC 12/12/13'		

NOTES:

1. MATERIAL

1.1 INSULATOR: HIGH TEMPERATURE(UL 94V-0).

1.2 CONTACT: COPPER ALLOY.

2. SPECIFICATION

2.1 TEMPERATURE: -40°C~+105°C.

2.2 CONTACT RESISTANCE: 20mΩ max.(initial).

2.3 INSULATION RESISTANCE: 1000MΩ min.

2.4 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.

3. PRODUCT NUMBER CODE:

DS1014 - X X X X X X - X

PLATING LEVEL(FOR GOLD ONLY) (B)

3A: 0.8-1.2u"

B: LEVEL B

PACKING TYPE

T:TRAY

R:TAPE ON REEL

B:TUBE

PICK UP SUPPORT

S:W/ PICK UP

X:W/O PICK UP

HOUSING COLOR

B: BLACK

W: WHITE

L: BLUE

A: GRAY

CONTACT PLATING

F1: FULL GOLD FLASH


MOUNTING TYPE

M: SMT TYPE

No.OF CONTACTS

08 10 12 14 16 20 26

30 34 40 50 60 64

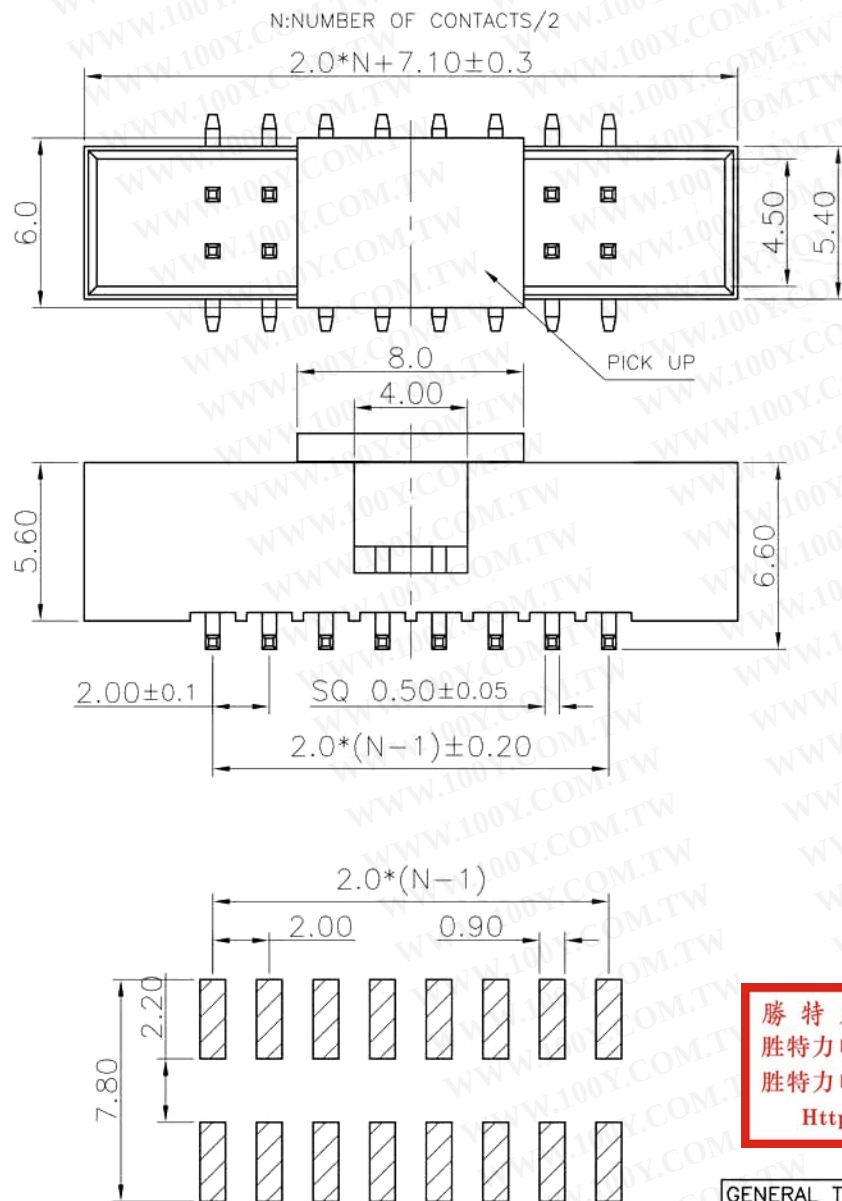

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	⊕	TITLE	2.0mm BOX HEADER	
X.	±0.60	X.	±5°	UNITS	mm		SMT TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1014 SMT SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1014-XMXXXX-X-B						