


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/22/05'		LJC 09/22/05'
B	MOLD CHANGE	JLZ 07/25/14'		LJC 07/25/14'
C	MOLD CHANGE	JLZ 08/04/14'		

N:NUMBER OF CONTACTS



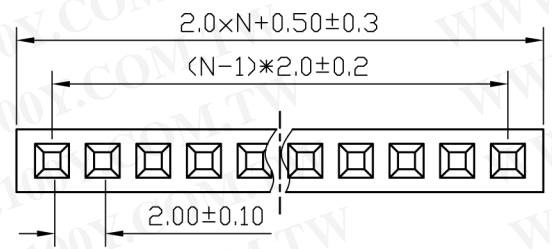


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

NOTES:

1. ELECTRICAL CHARACTERISTICS:
  - 1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
  - 2.1 TEMPERATURE: -40°C~+105°C.
3. PART NUMBER: DS1026-01
4. PRODUCT NUMBER CODE:
 

DS1026-01 - X X X X X

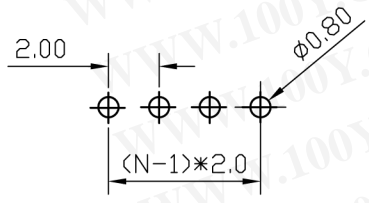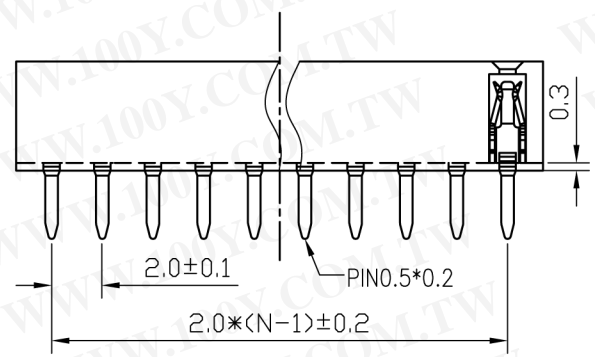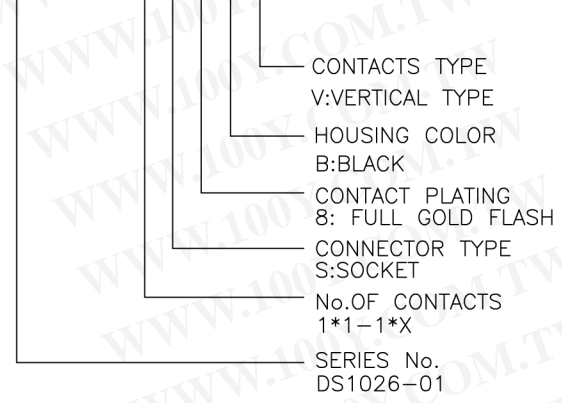

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1026-01-XXXXX-C	

PROJECTION		TITLE	FEMALE HEADER PITCH 2.0mm TYPE	
UNITS	mm			
SHEET SIZE	A4	SERIES	DS1026-01 SERIES	