


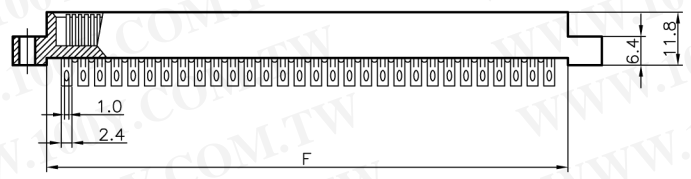



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 12/29/14'		

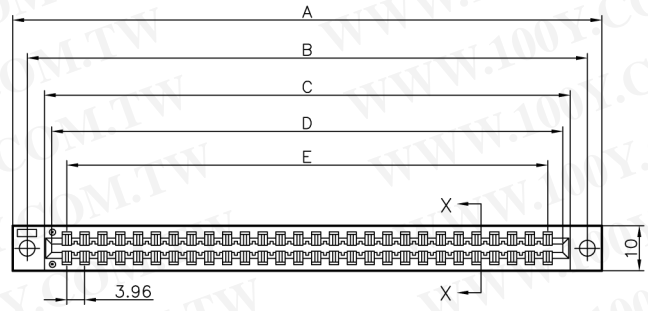

Solder type



Vertical type

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

NOTES:

1. SPECIFICATIONS
 - . Contact Resistance: 30mΩ max.at DC 100mA
 - . Insulation Resistance: 1000MΩ min.
 - . Current Rating: 1A
 - . Dielectric Withstanding Voltage: AC500V For 1 minute
 - . Operating Temperature: -20°C~+105°C
2. MATERIALS
 - . Contact: Copper Alloy.
 - . Housing: PBT.
3. PRODUCT NUMBER CODE:

DS1060-02 - X X X

 - Terminal style
 - 009: Solder type
 - 029: Vertical type
 - Contact Plating
 - 0: Selective gold flash
 - 8: Full gold flash
 - NO. of contacts
 - 20 24 30 36 44 56 72

DIMENSIONS

	A	B	C	D	E	F
20	61.02	54.67	46.93	43.70	35.73	45.93
24	68.94	62.59	54.85	51.62	43.65	53.58
30	80.87	74.52	66.78	63.55	55.58	65.78
36	92.78	86.43	78.69	75.46	67.49	77.69
44	108.66	102.31	94.57	91.34	83.37	93.57
56	132.48	126.13	118.39	115.16	107.19	117.39
72	164.16	157.81	150.07	146.84	138.87	149.07

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	EDGE CONNECTOR 3.96mm	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1060-02 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE	CUSTOMER						
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1060-02-XXX-A						