

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 20/06/05		

NOTES:




1. SPECIFICATIONS

- Contact Resistance: 30mΩ max
- Insulation Resistance: 1000MΩ min.
- Current Rating: 1A
- Dielectric withstanding voltage: AC 500V For 1 minute
- Contact: Copper alloy.
- Housing: Thermoplastic(UL 94V-0)

2. PRODUCT NUMBER CODE:

DS1088 - X X X X

- Screw type
X: W/O screw
S: W/ #4-40(UNC) screw
- Contact plating
0: Selective gold flash
- Shell plating
N: Nickel
6: Tin
- Color of housing
W:WHITE
B:BLACK
V:Ivory

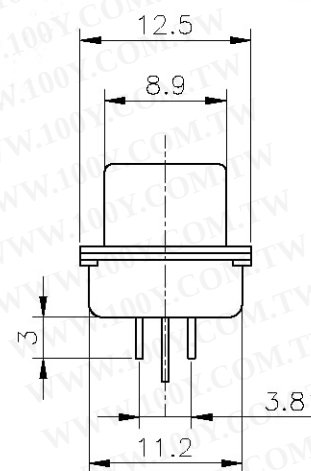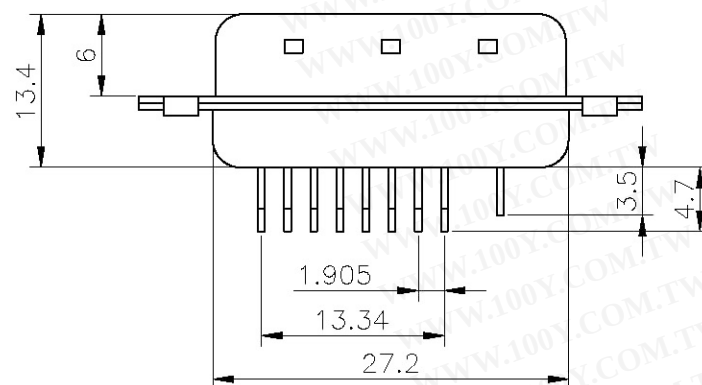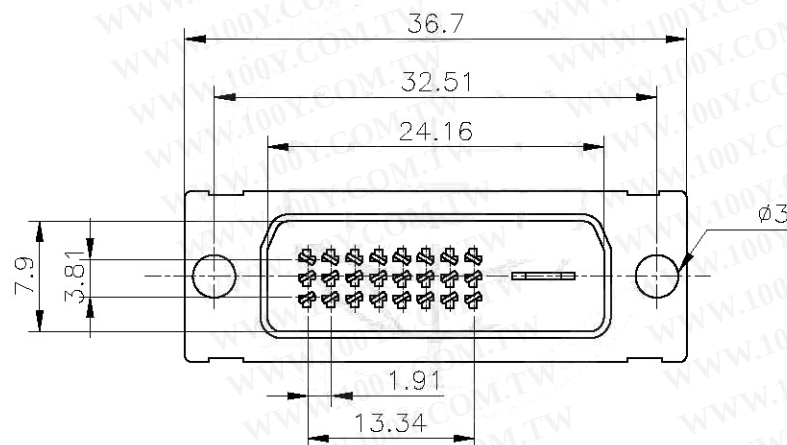

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS		DVI PLUG 24+1(JDB-241)
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES
.XX	±0.25	.XX	±2°			DS1088
DRAWING TYPE	CUSTOMER					
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.	C-DS1088-XXXX					