


REV.	ECN NO	LOCATIONS

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

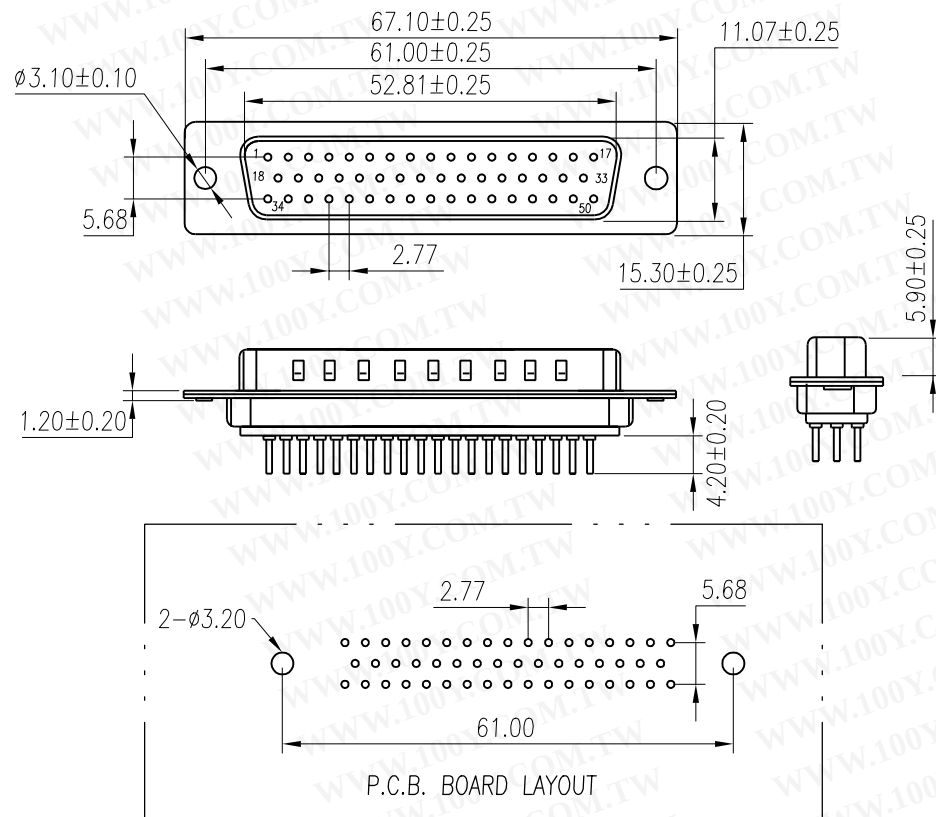

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass, $t=0.20\text{mm}$.
- 1.3 Shell: Cold rolled steel, $t=0.40\text{mm}$.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3.Finishes:

- 3.1 Contacts: Gold flashed 1u", 3u", 5u", 10u", 15u", 30u".
- 3.2 Shell: Nickel, tin or Zinc plated

8	Hex Screw	2	Brass	H5*10	Tin Plated
7	Boardlock NUT	2	Brass	H4.75*11.5	Nickel Plated
6	8.0 Nut	2	Brass	H4.75*8.0	Nickel Plated
5	3B Nut	2	Brass	H4.75*4.75	Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	50	Brass	T=0.20mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

A	前鉗型(不通孔)	B	后鉗型(通孔)	C	后鉗型(魚叉)
Dimensions for housing views: - View A: 5.8 ± 0.15 - View B: 3.2 ± 0.15 - View C: 6.0 ± 0.15					

PART NO:	MATERIAL:
MODEL NO:	FINISH:
UNIT: mm	SIZE: A4
TOLERANCE UNSPECIFIED	DR: '06/04/21
.x ± 0.3	CHK: '06/04/21
.xx ± 0.20	APP: '06/04/21
.xxx ± 0.100	
ANG. $\pm 1^{\circ}$	
PART NAME: D-SUB DIP P.C.B 50PIN(M)	
DWG NO: S/A-154	REV: AO
SCALE: 1:1	SHEET: 1 of 1