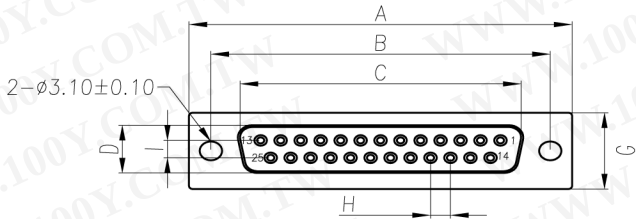
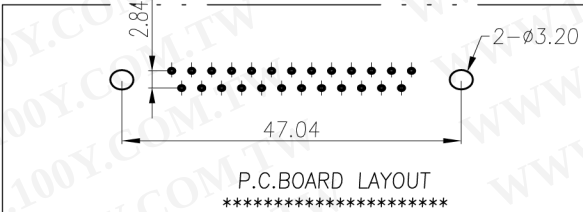

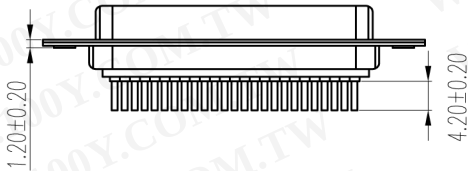











1	2	3	4	5	A																																																																						
   <table><tr><th>A</th><th>前鉚型(不通孔)</th><th>B</th><th>后鉚型(通孔)</th><th>C</th><th>后鉚型(魚叉)</th></tr><tr><td colspan="6"></td></tr></table>					A	前鉚型(不通孔)	B	后鉚型(通孔)	C	后鉚型(魚叉)	  						Note: 1.Material: 1.1 Insulator: P.B.T UL 94-V0 rated. 1.2 Contact: Brass,t=0.20mm. 1.3 Shell: Cold rolled steel,t=0.40mm. 2.Specification: 2.1 Current rating: 1 A Max. 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute. 2.3 Contact resistance: 30 mΩ Max. 2.4 Insulation resistance: 1000 MΩ Min at DC 500V. 2.5 Total mating force: 5.0 Kgf Max. 2.6 Total unmating force: 2.5 Kgf Min. 2.7 Temperature range: -55°C~+105°C	<table><tr><td>8</td><td>Hex Screw</td><td>2</td><td>Brass</td><td>H5*10</td><td>Tin Plated</td></tr><tr><td>7</td><td>Boardlock NUT</td><td>2</td><td>Brass</td><td>H4.75*11.5</td><td>Nickel Plated</td></tr><tr><td>6</td><td>8.0 Nut</td><td>2</td><td>Brass</td><td>H4.75*8.0</td><td>Nickel Plated</td></tr><tr><td>5</td><td>3B Nut</td><td>2</td><td>Brass</td><td>H4.75*4.75</td><td>Nickel Plated</td></tr><tr><td>4</td><td>Back-shell</td><td>1</td><td>Cold Rolled Steel</td><td>T=0.40mm</td><td>Tin Plated</td></tr><tr><td>3</td><td>Front-shell</td><td>1</td><td>Cold Rolled Steel</td><td>T=0.40mm</td><td>Nickel Plated</td></tr><tr><td>2</td><td>Contact</td><td>9~37</td><td>Brass</td><td>T=0.20mm</td><td>Gold Flashed</td></tr><tr><td>1</td><td>Housing</td><td>2</td><td>P.B.T</td><td>UL 94-V0</td><td>Black/Blue/White</td></tr><tr><td>No.</td><td>Part Name</td><td>Q'ty</td><td>Material</td><td>Remarks & Thickness</td><td>Finish</td></tr></table>	8	Hex Screw	2	Brass	H5*10	Tin Plated	7	Boardlock NUT	2	Brass	H4.75*11.5	Nickel Plated	6	8.0 Nut	2	Brass	H4.75*8.0	Nickel Plated	5	3B Nut	2	Brass	H4.75*4.75	Nickel Plated	4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated	3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated	2	Contact	9~37	Brass	T=0.20mm	Gold Flashed	1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White	No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish	C		
A	前鉚型(不通孔)	B	后鉚型(通孔)	C	后鉚型(魚叉)																																																																						
  																																																																											
8	Hex Screw	2	Brass	H5*10	Tin Plated																																																																						
7	Boardlock NUT	2	Brass	H4.75*11.5	Nickel Plated																																																																						
6	8.0 Nut	2	Brass	H4.75*8.0	Nickel Plated																																																																						
5	3B Nut	2	Brass	H4.75*4.75	Nickel Plated																																																																						
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated																																																																						
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated																																																																						
2	Contact	9~37	Brass	T=0.20mm	Gold Flashed																																																																						
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White																																																																						
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish																																																																						
<table><tr><th>PART NO</th><th>A±0.25</th><th>B±0.25</th><th>C±0.25</th><th>D±0.25</th><th>E±0.25</th><th>G±0.25</th><th>H±0.20</th><th>I±0.20</th></tr><tr><td>DIP-09S</td><td>30.80</td><td>25.00</td><td>16.30</td><td>7.90</td><td>16.80</td><td>12.60</td><td>2.77</td><td>2.84</td></tr><tr><td>DIP-15S</td><td>39.20</td><td>33.32</td><td>24.70</td><td>7.90</td><td>16.80</td><td>12.60</td><td>2.77</td><td>2.84</td></tr><tr><td>DIP-25S</td><td>53.05</td><td>47.04</td><td>38.40</td><td>7.90</td><td>16.80</td><td>12.60</td><td>2.77</td><td>2.84</td></tr><tr><td>DIP-37S</td><td>69.40</td><td>63.50</td><td>54.80</td><td>7.90</td><td>16.80</td><td>12.60</td><td>2.77</td><td>2.84</td></tr></table>					PART NO	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	G±0.25	H±0.20	I±0.20	DIP-09S	30.80	25.00	16.30	7.90	16.80	12.60	2.77	2.84	DIP-15S	39.20	33.32	24.70	7.90	16.80	12.60	2.77	2.84	DIP-25S	53.05	47.04	38.40	7.90	16.80	12.60	2.77	2.84	DIP-37S	69.40	63.50	54.80	7.90	16.80	12.60	2.77	2.84																										
PART NO	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	G±0.25	H±0.20	I±0.20																																																																			
DIP-09S	30.80	25.00	16.30	7.90	16.80	12.60	2.77	2.84																																																																			
DIP-15S	39.20	33.32	24.70	7.90	16.80	12.60	2.77	2.84																																																																			
DIP-25S	53.05	47.04	38.40	7.90	16.80	12.60	2.77	2.84																																																																			
DIP-37S	69.40	63.50	54.80	7.90	16.80	12.60	2.77	2.84																																																																			
<table><tr><td></td><td></td><td></td><td></td><td></td><td>DRAWN:</td><td>GENERAL TOLERANCE:</td><td></td><td></td></tr><tr><td>E</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>D</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>C</td><td></td><td></td><td></td><td></td><td></td><td>CHECKED:</td><td>UNIT:</td><td rowspan="4">SIZE A4</td></tr><tr><td>B</td><td></td><td></td><td></td><td></td><td></td><td></td><td>SCALE:</td></tr><tr><td>A</td><td></td><td></td><td></td><td></td><td>JECSON</td><td></td><td>SHEET:</td></tr><tr><td>REV</td><td>Date</td><td>FILE</td><td>BY</td><td></td><td></td><td>PROJECTION:</td><td>DESCRIPTION:</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PART NO:</td><td>E04-xxP</td></tr></table>										DRAWN:	GENERAL TOLERANCE:			E									D									C						CHECKED:	UNIT:	SIZE A4	B							SCALE:	A					JECSON		SHEET:	REV	Date	FILE	BY			PROJECTION:	DESCRIPTION:								PART NO:	E04-xxP	勝特力材料 886-3-5753170 勝特力电子(上海) 86-21-54151736 勝特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw	D
					DRAWN:	GENERAL TOLERANCE:																																																																					
E																																																																											
D																																																																											
C						CHECKED:	UNIT:	SIZE A4																																																																			
B							SCALE:																																																																				
A					JECSON		SHEET:																																																																				
REV	Date	FILE	BY			PROJECTION:	DESCRIPTION:																																																																				
							PART NO:	E04-xxP																																																																			