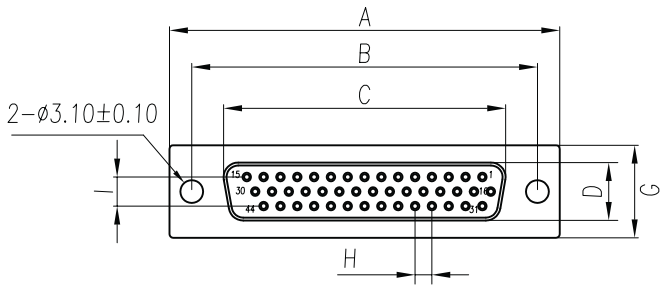

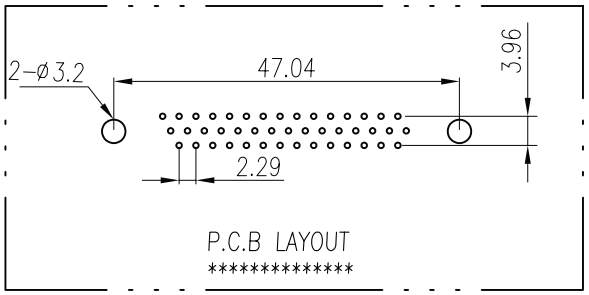

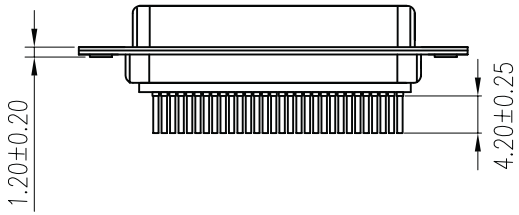



A	前鉚型(不通孔)	B	后鉚型 (通孔)	C	后鉚型(魚叉)







Note:

1.Material:

1.1 Insulator: P.B.T UL 94-V0 rated.
1.2 Contact: Brass,t=0.20mm.
1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

2.1 Current rating: 1 A Max.
2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
2.3 Contact resistance: 30 mΩ Max.
2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
2.5 Total mating force: 7.0 Kgf Max.
2.6 Total unmating force: 3.5 Kgf Min.
2.7 Temperature range: -55°C~+105°C

No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish
8	Hex Screw	2	Brass	H5*10	Nickel Plated
7	Boardlock NUT	2	Brass	H4.75*11.5	Nickel Plated
6	8.0 Nut	2	Brass	H4.75*8.0	Nickel Plated
5	3B Nut	2	Brass	H4.75*4.75	Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Nickel Plated
2	Contact	15~62	Brass	T=0.20mm	Gold Flashed
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White

PART NO	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	G±0.25	H±0.20	I±0.20
HDIP-15S	30.80	25.00	16.33	7.90	16.00	12.60	2.29	3.96
HDIP-26S	39.20	33.32	24.66	7.90	16.00	12.60	2.29	3.96
HDIP-44S	53.05	47.04	38.38	7.90	16.00	12.60	2.29	3.96
HDIP-62S	69.40	63.50	54.84	7.90	16.00	12.60	2.41	3.96

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
http://www.100y.com.tw

REV	Date	FILE	BY
			JECSON

DRAWN:
CHECKED:
GENERAL TOLERANCE:
UNIT:
SCALE:
SHEET:
PROJECTION:
DESCRIPTION:
PART NO: E10-xxP
SIZE A4