


勝特力電材超市-龍山店 886-3-5773766  
 勝特力電材超市-光復店 886-3-5729570  
 勝特力電子(上海) 86-21-34970699  
 勝特力電子(深圳) 86-755-83298787  
<http://www.100y.com.tw>

With Mounting Ears

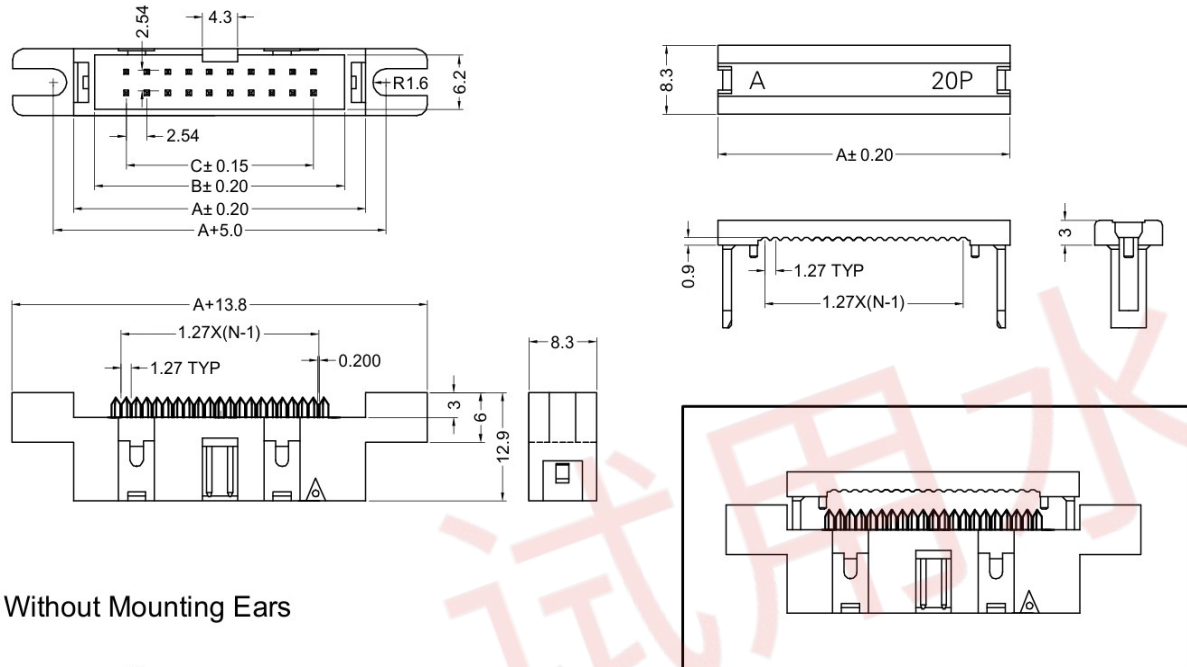

材质 Material:

绝缘体 Insulator: Glass filled PBT UL94V-0 ,Grey  
 接触件 Contacts: Brass  
 电镀层 Plating: Contact Gold and Cutting Tin over Nickel

电气性能 Electrical Characteristics:

接触电阻 Contact Resistance: 30mΩmax. at DC 100mA  
 绝缘电阻 Insulator Resistance: 1000MΩmin. at 500V DC  
 耐压 Withstanding Voltage: 1000V AC/rms 50Hz For 1 minute  
 工作电流 Current Rating: 2 AMP

使用温度范围 Operating Temperature: -55℃~+105℃

导线规格 Cable: 1.27mm (0.050") pitch flat cable

订购方法 How To Order

DK303-10

Series Position

A

A: With Mounting Ears


B: Without Mounting Ears

Y

Y: Grey

B: Black

Without Mounting Ears

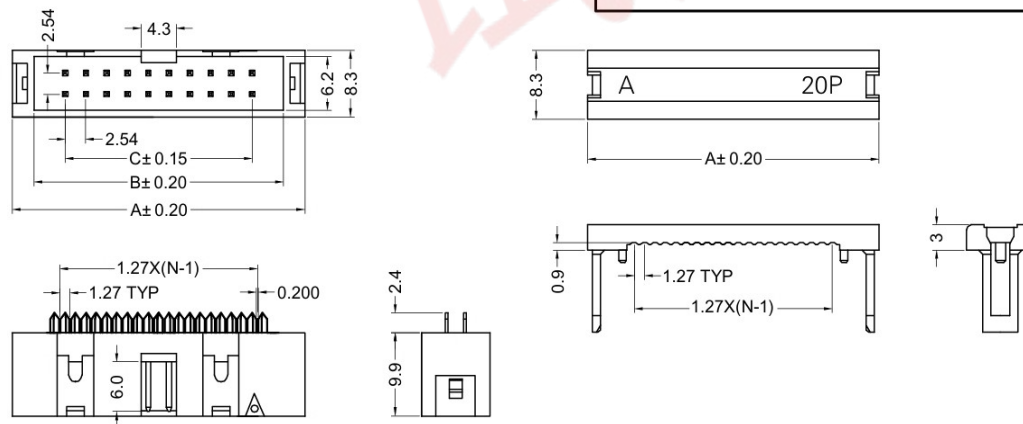

Dimension

position	A	B	C
08	20.46	15.26	7.62
10	23.00	17.80	10.16
14	28.08	22.88	15.24
16	30.62	25.42	17.78
20	35.70	30.50	22.86
26	43.32	38.12	30.48
30	48.40	43.20	35.56
34	53.48	48.28	40.64
40	61.10	55.90	48.26
50	73.80	68.60	60.96