

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SECTION 06



ELECTRICAL

- Contact Current Rating : 1 Ampere
- Contact Resistance : 15mΩ Max
- Insulator Resistance : 500MΩ Min
- Dielectric Withstanding Voltage : 500V AC 60Seconds

MATERIAL

- Insulator : Nylon UL 940
- Contact : Brass
- Contact Plated : Gold Plated, Tin Plated, Selective Plated

Operation Temperature : - 40℃ to + 105℃

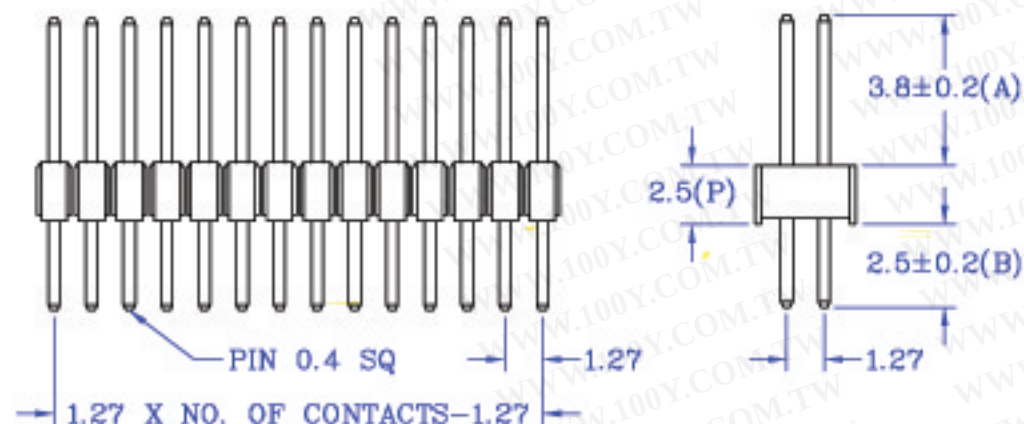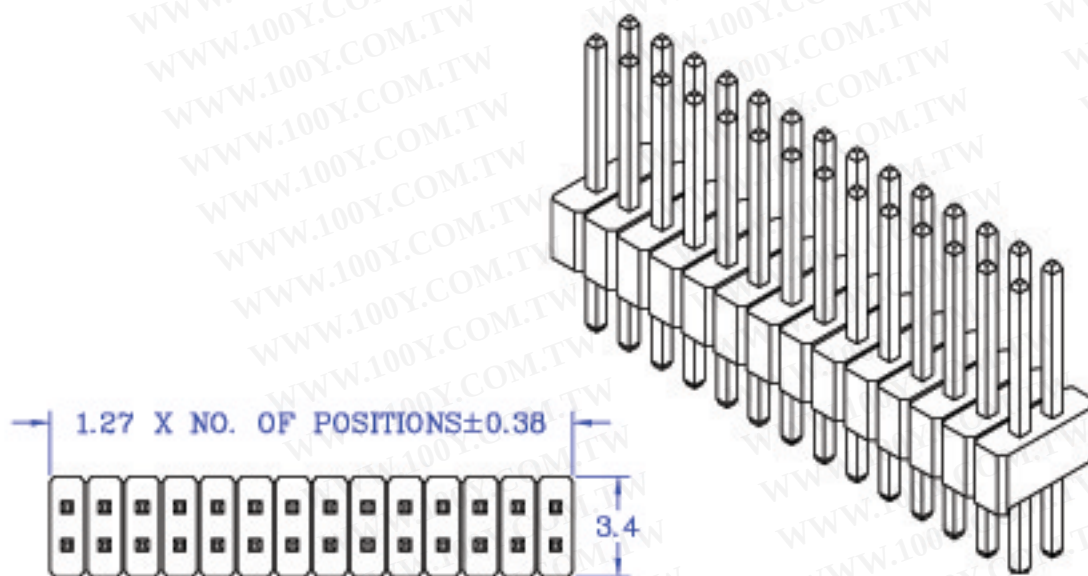

P	3.0	2.5	2.0	1.7	1.5	1.0
---	-----	-----	-----	-----	-----	-----

A = mm

B = mm

DRAWN BY
FUFU

CHECKED BY
WENDY

DATE

SCALE
1:1

HHPHS2XXGB1HXX

886 XX-HX

DRAWING NO.