

# S101D01/S101D02 S201D01/S201D02

## 16-Pin DIP Type SSR for Low Power Control

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### ■ Features

1. Compact  
(16-pin dual-in-line package type)
2. RMS ON-state current  $I_T$ : 1.2Arms
3. Built-in zero-cross circuit  
(S101D02, S201D02)
4. Recognised by UL, file No. E94758
5. Approved by CSA, No. LR63705

### ■ Applications


1. Fan heaters
2. Microwave ovens
3. Refrigerators
4. Air conditioners

### ■ Model Line-ups

	For 100V lines	For 200V lines
For phase control No built-in zero-cross circuit	<b>S101D01</b>	<b>S201D01</b>
Built-in zero-cross circuit	<b>S101D02</b>	<b>S201D02</b>

### ■ Outline Dimensions

(Unit : mm)

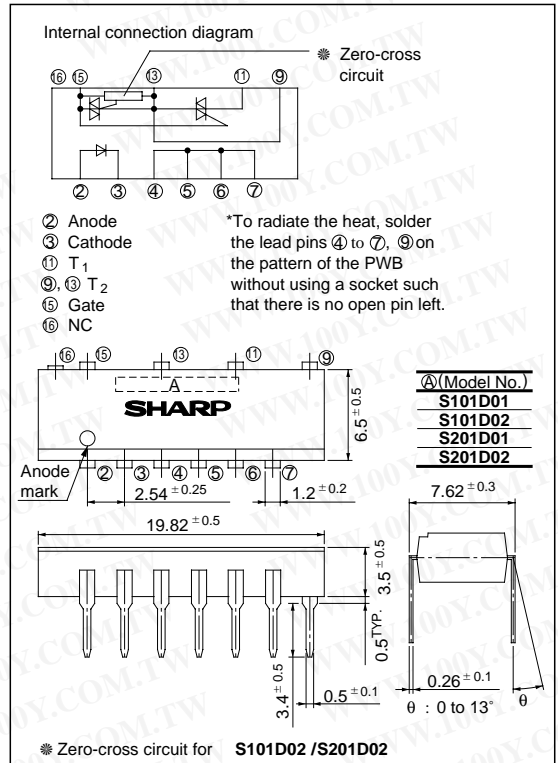

### ■ Absolute Maximum Ratings

(T<sub>a</sub> = 25°C)

Parameter	Symbol	Rating		Unit
		S101D01/S101D02	S201D01/S201D02	
Input	Forward current	50		mA
	Reverse voltage	6		V
Output	RMS ON-state current	1.2		A <sub>rms</sub>
	*1 Peak one cycle surge current	12		A
	Repetitive peak OFF-state voltage	400	600	V
	*2 Isolation voltage	4 000		V <sub>rms</sub>
Operating temperature	T <sub>opr</sub>	- 25 to + 85		°C
Storage temperature	T <sub>stg</sub>	- 40 to + 125		°C
*3 Soldering temperature	T <sub>sol</sub>	260		°C

\*1 50Hz, sine wave

\*2 40 to 60% RH, AC 60Hz for 1 minute

\*3 For 10 seconds


**■ Electrical Characteristics**

( $T_a = 25^\circ\text{C}$ )


Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	$V_F$	$I_F = 20\text{mA}$	-	1.2	1.4	V
	Reverse current	$I_R$	$V_R = 3\text{V}$	-	-	$10^{-5}$	A
Output	Repetitive peak OFF-state current	$I_{DRM}$	$V_{DRM} = 400\text{V}$	-	-	$10^{-4}$	A
			$V_{DRM} = 600\text{V}$	-	-	$10^{-4}$	A
	ON-state voltage	$V_T$	$I_T = 1.2\text{A}$	-	-	1.7	V
	Holding current	$I_H$	$V_D = 6\text{V}$	-	-	25	mA
	Zero-cross voltage	$V_{OX}$	Resistance load, $I_F = 15\text{mA}$	-	-	35	V
	Critical rate of rise of OFF-state voltage	$dV/dt$	$V_{DRM} = 1/\sqrt{2} \cdot 400\text{V}$	200	-	-	$\text{V}/\mu\text{s}$
$V_{DRM} = 1/\sqrt{2} \cdot 600\text{V}$			100	-	-	$\text{V}/\mu\text{s}$	
Transfer characteristics	Minimum trigger current	$I_{FT}$	$V_D = 6\text{V}, R_L = 100\Omega$	-	-	10	mA
	Isolation resistance	$R_{ISO}$	DC500V, 40 to 60% RH	$5 \times 10^{10}$	$10^{11}$	-	$\Omega$
	Turn-on time	$t_{on}$	$V_D = 6\text{V}, R_L = 100\Omega, I_F = 20\text{mA}$	-	-	100	$\mu\text{s}$

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


**Fig. 1 RMS ON-state Current vs. Ambient Temperature**

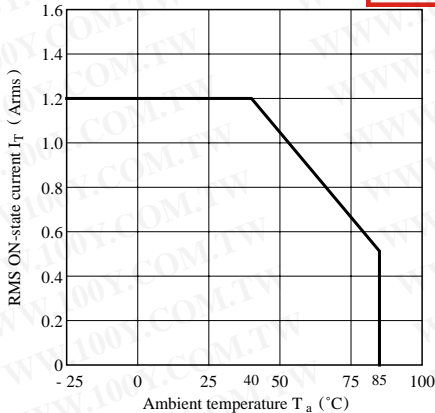


**Fig. 2 Forward Current vs. Ambient Temperature**

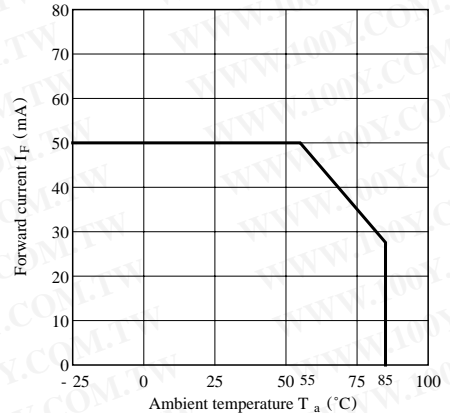


**Fig. 3 Forward Current vs. Forward Voltage**

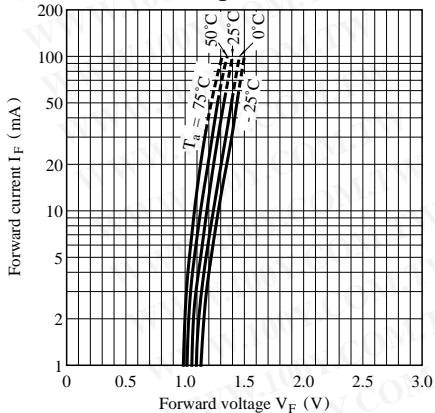


**Fig. 4 Minimum Trigger Current vs. Ambient Temperature (S101D01)**

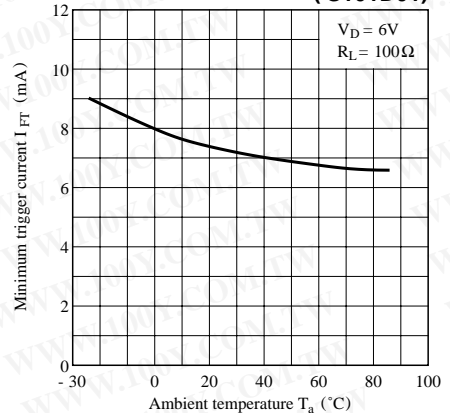


**Fig. 5 Minimum Trigger Current vs. Ambient Temperature (S101D02, S201D02)**

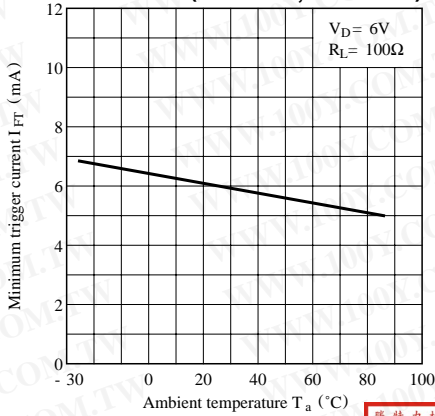

**Fig. 6 Minimum Trigger Current vs. Ambient Temperature (S201D01)**

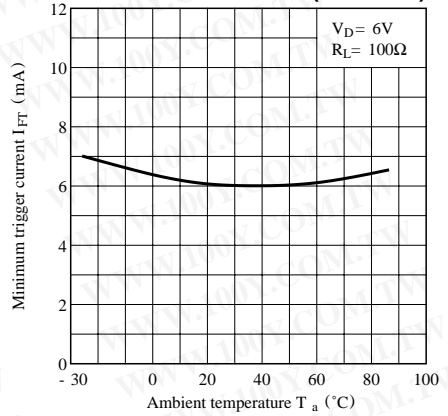


**Fig. 7 ON-state Voltage vs. Ambient Temperature**

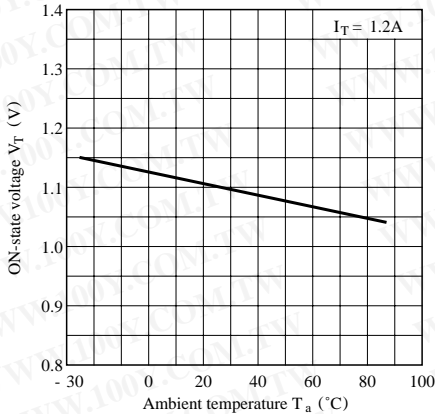


勝特力材料 886-3-5753170  
 勝特力電子(上海) 86-21-54151736  
 勝特力電子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


**Fig. 8 Relative Holding Current vs. Ambient Temperature**

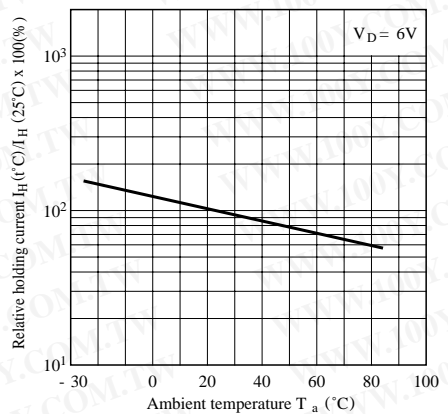


**Fig. 9 ON-state Current vs. ON-state Voltage**

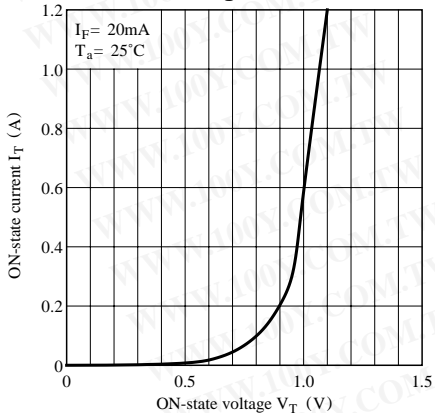


**Fig.10 Turn-on Time vs. Forward Current (S101D01)**

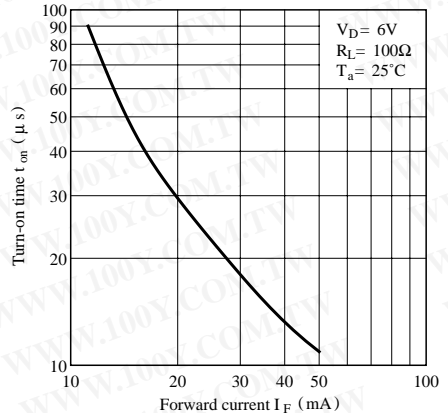


**Fig.11 Turn-on Time vs. Forward Current (S101D02, S201D02)**

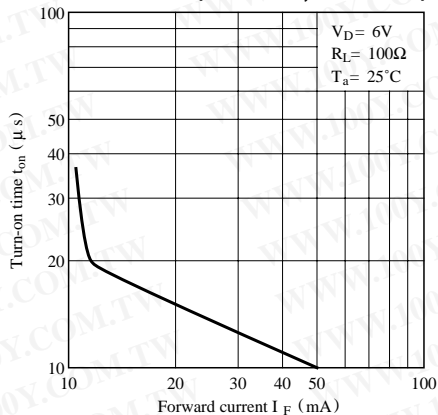


**Fig.12 Turn-on Time vs. Forward Current (S201D01)**

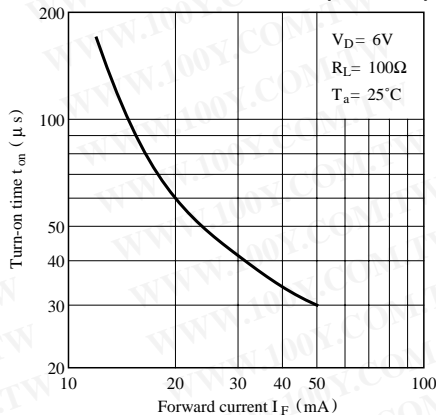

## Basic Operation Circuit

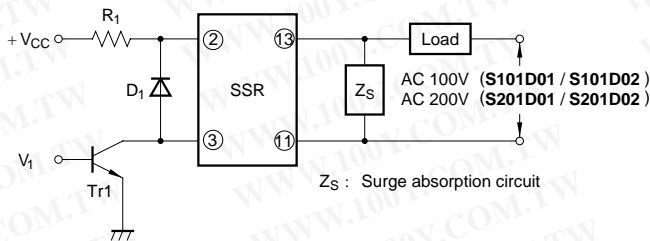

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

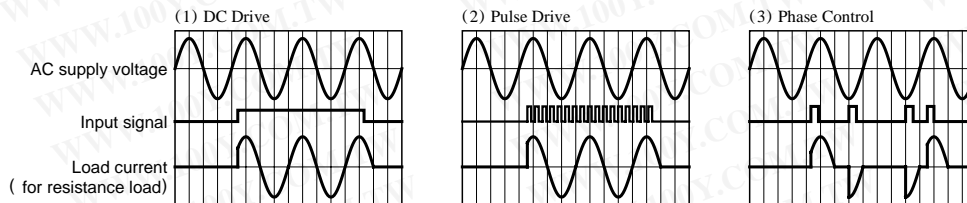

- Notes 1) If large amount of surge is loaded onto  $V_{CC}$  or the driver circuit, add a diode  $D_1$  between terminals 2 and 3 to prevent reverse bias from being applied to the infrared LED.
- 2) Be sure to install a surge absorption circuit.  
 An appropriate circuit must be chosen according to the load (for CR, choose its constant). This must be carefully done especially for an inductive load.
- 3) For phase control, adjust such that the load current immediately after the input signal is applied will be more than 60mA.

### (Precautions for Use)

- All pins must be soldered since they are also used as heat sinks (heat radiation fins). In designing, take into the heat radiation from the mounted SSR.
- For higher radiation efficiency that allows wider thermal margin, secure a wider round pattern for Pin 13 when designing mounting pattern. The rounded part of Pin 15 (gate) must be as small as possible. Pulling the gate pattern around increases the change of being affected by external noise.
- As for other general cautions, refer to the chapter "Precautions for Use"

### NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
  - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
    - Personal computers
    - Office automation equipment
    - Telecommunication equipment [terminal]
    - Test and measurement equipment
    - Industrial control
    - Audio visual equipment
    - Consumer electronics
  - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
    - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
    - Traffic signals
    - Gas leakage sensor breakers
    - Alarm equipment
    - Various safety devices, etc.
  - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
    - Space applications
    - Telecommunication equipment [trunk lines]
    - Nuclear power control equipment
    - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)