

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

NOTES:






1. PART DESIGNED IN METRIC.
2. TERMINAL FOR USE WITH 5557 SERIES HOUSINGS.
3. MATES WITH 5558, 5566 AND 5569 SERIES CONNECTORS.
4. REFER TO DWG. NO. CS-5556*/5558* FOR CRIMP SPECIFICATIONS.
5. PRODUCT SPECIFICATION AND PROCESSING PARAMETERS SEE: PS-5556-001, PS-5556-002, PS-5556-003

MATERIAL:

- A. CDA 260 BRASS, .0080±.0004/(0.203±0.010) THICK.
B. CDA 510 PHOS. BRONZE .0080±.0004/(0.203±0.010) THICK.

PLATING:

- *A. SELECTIVE GOLD PLATE .000030/(0.00076) MIN., AND SELECTIVE MATTE TIN .000100/(0.00254) OVER .000050/(0.00127) NICKEL OVERALL.
*B. SELECTIVE GOLD PLATE .000015/(0.00038) MIN., AND SELECTIVE MATTE TIN .000100/(0.00254) OVER .000050/(0.00127) NICKEL OVERALL.
*C. SELECTIVE GOLD PLATE .000050/(0.00127) MIN., AND SELECTIVE MATTE TIN .000100/(0.00254) OVER .000050/(0.00127) NICKEL OVERALL.
*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC."
CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD PLATING.

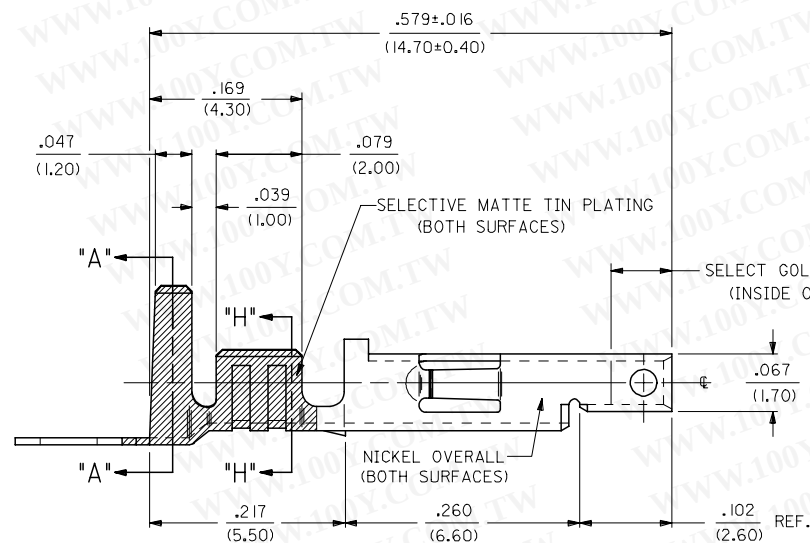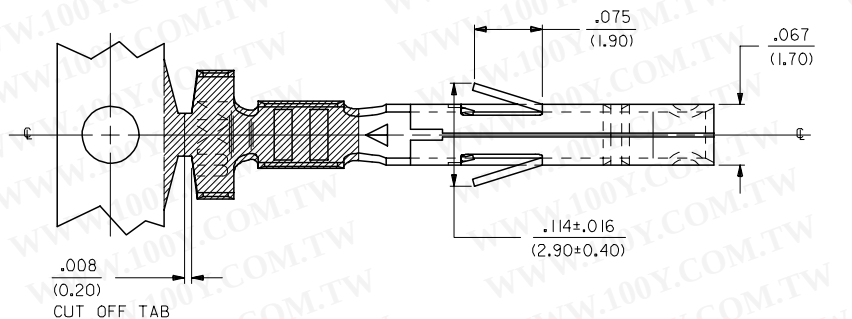

REMOVE 28-30 GAGE EC NO: UCP2006-1559 DRAWNDUNE 2006/01/11 CHKD:GPOUGAR 2006/01/12 APPR: JCOMERCJ 2006/01/16	QUALITY SYMBOLS ▽=0 ▽=0 R.	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .014 1 PLACE ± 0.36 ± --- ANGULAR ±1/2°	DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
			IN/MM		10:1	METRIC		
			DRAWN BY	DATE	TITLE			
			GEP	5/17/90	TERMINAL, MINI-FIT JR., FEMAE CRIMP, SELECT GOLD BLANK PLATE FORM			
			CHECKED BY	DATE	MOLEX MOLEX INCORPORATED			
			RJF	5/17/90				
			APPROVED BY	DATE				
			RAS	5/17/90				
			MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
			SEE SHT. 2		SD-5556-GSP*		1 OF 2	
			SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
			C					

13	12	11	10	9	8	7	6	5	5556	4	3	2	1										
PART NO.	ENG. NO.	MAT'L.	PLATE	WIRE GAGE	QUANTITY PER REEL	DIM. "B"	DIM. "C"	DIM. "D"	DIM. "E"	DIM. "F"	DIM. "G"	LEGEND:											
39-00-0163	5556-GSP	A	A	18-24 GA.	4,000	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.075±.012 (1.90±0.30)	.091±.016 (2.40±0.40)	.020 (0.50)												
39-00-0164	5556-GSPL			22-28 GA.	6,000	.091±.016 (2.30±0.30)	.177±.016 (4.50±0.40)	.024 (0.60)	.071±.012 (1.80±0.30)	.065±.016 (1.65±0.40)	.016 (0.40)	5556-***GS*P*											
39-00-0165	5556-GS2P																						
39-00-0166	5556-GS2PL			16 GA.	4,000	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.091±.012 (2.30±0.30)	.106±.016 (2.70±0.40)	.024 (0.60)	BASE NO. _____ MATERIAL _____ BLANK= BRASS PB= PHOS. BRONZE GOLD, SELECT _____ PLATING & CRIMP SIZE COMB. _____ BLANK THRU I5 BLANK-PLATE-FORM VERSION _____ CHAIN OR LOOSE _____ BLANK= CHAIN L= LOOSE											
39-00-0167	5556-GS3P																						
39-00-0168	5556-GS3PL																						
NOT TOOLED	5556-GS10P			14 GA.	4,000																		
NOT TOOLED	5556-GS10PL																						
39-00-0169	5556-GS4P	A	B	18-24 GA.	4,000	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.075±.012 (1.90±0.30)	.091±.016 (2.40±0.40)	.020 (0.50)												
39-00-0170	5556-GS4PL			22-28 GA.	6,000	.091±.012 (2.30±0.30)	.091±.016 (2.30±0.40)	.024 (0.60)	.071±.012 (1.80±0.30)	.065±.016 (1.65±0.40)	.016 (0.40)												
39-00-0171	5556-GS5P																						
39-00-0172	5556-GS5PL			16 GA.	4,000	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.091±.012 (2.30±0.30)	.106±.016 (2.70±0.40)	.024 (0.60)												
39-00-0173	5556-GS6P																						
39-00-0174	5556-GS6PL																						
NOT TOOLED	5556-GS11P			14 GA.	4,000																		
NOT TOOLED	5556-GS11PL																						
39-00-0175	5556-GS7P	A	C	18-24 GA.	4,000	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.075±.012 (1.90±0.30)	.091±.016 (2.40±0.40)	.020 (0.50)												
39-00-0176	5556-GS7PL			22-28 GA.	6,000	.091±.012 (2.30±0.30)	.091±.016 (2.30±0.40)	.024 (0.60)	.071±.012 (1.80±0.30)	.065±.016 (1.65±0.40)	.016 (0.40)												
39-00-0177	5556-GS8P																						
39-00-0178	5556-GS8PL			16 GA.	4,000	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.091±.012 (2.30±0.30)	.106±.016 (2.70±0.40)	.024 (0.60)												
39-00-0179	5556-GS9P																						
39-00-0180	5556-GS9PL																						
NOT TOOLED	5556-GS12P			14 GA.	4,000																		
NOT TOOLED	5556-GS12PL																						
39-00-0181	5556-PBGSP	B	A	18-24 GA.	4,000	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.075±.012 (1.90±0.30)	.091±.016 (2.40±0.40)	.020 (0.50)												
39-00-0182	5556-PBGSPPL			22-28 GA.	6,000	.091±.012 (2.30±0.30)	.091±.016 (2.30±0.40)	.024 (0.60)	.071±.012 (1.80±0.30)	.065±.016 (1.65±0.40)	.016 (0.40)												
39-00-0183	5556-PBGSP2P																						
39-00-0184	5556-PBGSP2PL			16 GA.	4,000	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.091±.012 (2.30±0.30)	.106±.016 (2.70±0.40)	.024 (0.60)												
39-00-0185	5556-PBGSP3P																						
39-00-0186	5556-PBGSP3PL																						
NOT TOOLED	5556-PBGSP10P			14 GA.	4,000																		
NOT TOOLED	5556-PBGSP10PL																						
39-00-0194	5556-PBGSP4P	B	B	18-24 GA.	4,000	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.075±.012 (1.90±0.30)	.091±.016 (2.40±0.40)	.020 (0.50)												
39-00-0195	5556-PBGSP4PL			22-28 GA.	6,000	.091±.012 (2.30±0.30)	.091±.016 (2.30±0.40)	.024 (0.60)	.071±.012 (1.80±0.30)	.065±.016 (1.65±0.40)	.016 (0.40)												
39-00-0196	5556-PBGSP5P																						
39-00-0197	5556-PBGSP5PL			16 GA.	4,000	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.091±.012 (2.30±0.30)	.106±.016 (2.70±0.40)	.024 (0.60)												
39-00-0198	5556-PBGSP6P																						
39-00-0199	5556-PBGSP6PL																						
NOT TOOLED	5556-PBGSP11P			14 GA.	4,000																		
NOT TOOLED	5556-PBGSP11PL																						
39-00-0200	5556-PBGSP7P	B	C	18-24 GA.	4,000	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.075±.012 (1.90±0.30)	.091±.016 (2.40±0.40)	.020 (0.50)												
39-00-0201	5556-PBGSP7PL			22-28 GA.	6,000	.091±.012 (2.30±0.30)	.091±.016 (2.30±0.40)	.024 (0.60)	.071±.012 (1.80±0.30)	.065±.016 (1.65±0.40)	.016 (0.40)												
39-00-0202	5556-PBGSP8P																						
39-00-0203	5556-PBGSP8PL			16 GA.	4,000	.142±.012 (3.60±0.30)	.177±.016 (4.50±0.40)	.035 (0.90)	.091±.012 (2.30±0.30)	.106±.016 (2.70±0.40)	.024 (0.60)												
39-00-0204	5556-PBGSP9P																						
39-00-0205	5556-PBGSP9PL																						
NOT TOOLED	5556-PBGSP12P			14 GA.	4,000																		
NOT TOOLED	5556-PBGSP12PL																						
勝特力材料 886-3-5753170 勝特力电子(上海) 86-21-34970699 勝特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw SEE SHEET 1 EC NO: UCP2006-1559 2006/01/11 DRW:NDUNNE CHKD:GOLGAR 2006/01/12 APPR:ICOMERC 2006/01/16 DESCRIPTION REV QUALITY SYMBOLS ▽=0 ▽=0 GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS DIMENSION STYLE IN/MM DRAWN BY DATE GEP 5/17/90 CHECKED BY DATE RJF 5/17/90 APPROVED BY DATE RAS 5/17/90 MATERIAL NO. DOCUMENT NO. SD-5556-GSP* SHEET NO. 2 2 THIRD ANGLE PROJECTION TERMINAL, MINI-FIT JR., FEMALE, CRIMP, SELECT GOLD BLANK-PLATE-FORM MOLEX INCORPORATED THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																							
13	12	11	10	9	8	7	6	5	5556	4	3	2	1										