

DWG. NO.
SD-51047-***00

E

D

A

C

B

DO NOT SCALE DRAWING


EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	REDRAWN EC NO. JC2000-0629 DRWN: K.KOHAMA 100 J/28 CHK: T.YAMAGUCHI 100 J/30 APPR: M.FUKUSHIMA 100 J/30
REV	DESCRIPTION	FINISH 仕上り	WIRE RANGE 適用電線範囲	INS. RANGE 被覆外径

MATERIAL 材料	ポリエステル POLYESTER ,UL94V-0
DESCRIPTION	回路番号1側マーク CKT.NO.1 MARK

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差		
10 UNDER 未満		±0.2
10 OVER 以上	30 UNDER 未満	±0.25
30 OVER 以上		±0.3
ANGLE 角度		±3°

SCALE 10:1	DESIGN UNITS ☒ mm ☐ INCH
DRAWN BY & DATE K.KOHAMA 100/ 3/28	CHECKED BY & DATE T.YAMAGUCHI 100/ 3/30
APPROVED BY & DATE M.FUKUSHIMA 100/ 3/30	CAD FILENAME S51047.S10

THIRD ANGLE PROJECTION	TITLE: 1.25 W/W CONN. PLG HSG.
MOLEX INCORPORATED	
MATERIAL NO. 51047-***00	DRAWING NO. SD-51047-***00
SHEET NO. I	SIZE B

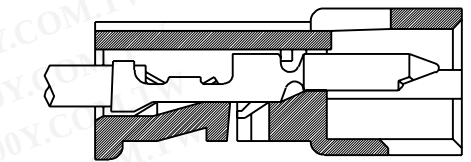

断面 E-E
SECT. E-E

注)
NOTE.

- 適合ターミナル: 50I25-8*00,50I33-8*00
APPLICABLE TERMINAL:50I25-8*00,50I33-8*00
- 2. 嵌合相手: 51021-***00
MATE WITH:51021-***00
- ロック窓は、2、3極は1ヶ、4極以上は2ヶとする。
LOCKING WINDOW:ONE PLACE FOR 2AND3CKT.
AND TWO PLACES FOR MORE THAN 4CKT.

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

12.95	14.25	13.05	11.25	51047-1000	10
11.7	13	11.8	10	-0900	9
10.45	11.75	10.55	8.75	-0800	8
9.2	10.5	9.3	7.5	-0700	7
7.95	9.25	8.05	6.25	-0600	6
6.7	8	6.8	5	-0500	5
5.45	6.75	5.55	3.75	-0400	4
4.2	5.5	4.3	2.5	-0300	3
2.95	4.25	3.05	1.25	51047-0200	2
D	A	C	B	ENG.NO.	極数 CKT.

DIMENSIONS:	SHT	REV
☐ mm ☐ INCH	☒ mm ONLY	REVISE ON CAD ONLY