



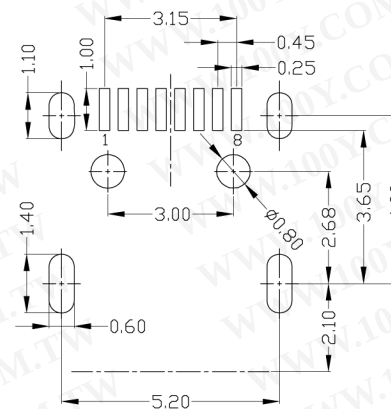





RoHS
Compliant
2002/95/EC

REV. ECN. NO. APPD.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

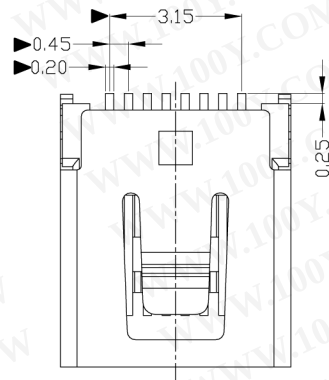

RECOMMENDED PCB LAYOUT

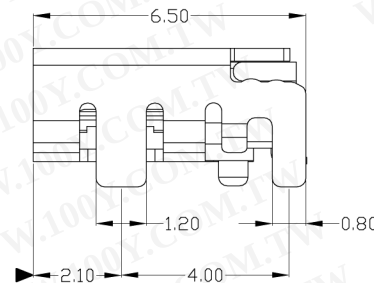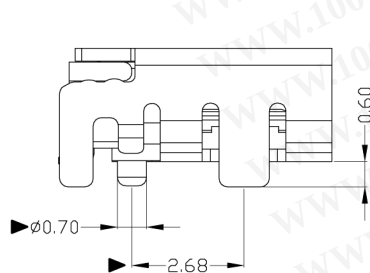

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 0.5AMP, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.
- PART NO.

MUBF-08*N-4BV40

W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP
1: Au 1U"
6: Au 30U"

Bill of materials:

3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2°	UNITS	mm	TITLE: Mini-usb 8pin 扁形母座 (SMT-A) PART NO.: MUBF-08*N-4BV40 DR: gan 2012/7/9 DWG NO.: AII-V40 CHKD: gan 2012/7/9 SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	X. ±0.3	X.* ±1°	MAT'L					
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	.XX ±0.25	.XX°	SEE NOTE					
NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX°	FINISH					
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.							