

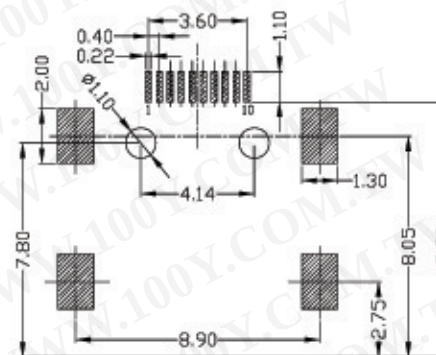








RoHS
Compliant
2002/95/EC

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

REV.	ECN.	NO.	APPD.

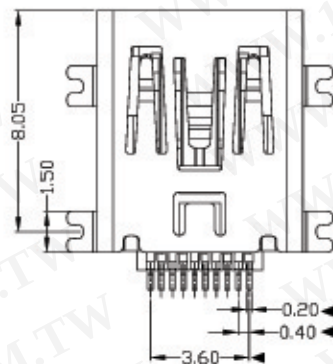

RECOMMENDED PCB LAYOUT

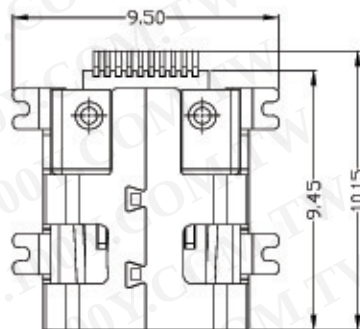

NOTES:

1. ELECTRICAL:

- VOLTAGE CURRENT RATING: 1.0AMP, 30V AC;
- INSULATION RESISTANCE: 500MΩ MIN;
- CONTACT RESISTANCE: 30mΩ MAX;
- WITHSTANDING VOLTAGE: 500V AC;
- OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- Mating Force: 35N MAX
- Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUNF-10*N-4BV44

W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	mm	TITLE:	PART NO.:
3	HOUSING	LCP	1	UL94V-0	.X ±0.3	.X* ±1*	MAT'L		Phillip Jack 10P SMT (For Charger) 有柱	MUNF-10*N-4BV44
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	SEE NOTE		DR: gan 2012/7/07	DWG NO.:
1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH		CHKD: gan 2012/7/07	AII-V44
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE 3MTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE 3MTECH INC.					Q'TY		SEE NOTE		APPD: gan 2012/7/07	SCALE
										SHEET
										REV.
										CUSTOMER DRAWING