

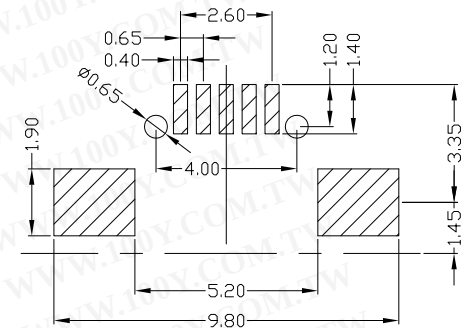







RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

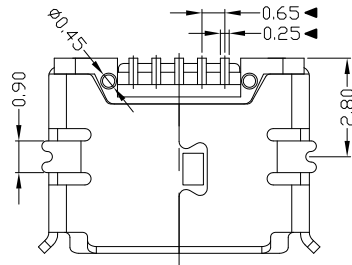

RECOMMENDED PCB LAYOUT

NOTES:

- ELECTRICAL CHARACTERISTIC:
 - VOLTAGE CURRENT RATING:
1.0A/contact terminal, 30V DC;
 - INSULATION RESISTANCE:
100MEGA ohms MIN;
 - CONTACT RESISTANCE:
50 milliohms MAX;
 - WITHSTANDING VOLTAGE:
300V AC AT Sea Level;
- Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- PART, NO.

MUYF-05*T-4BH81

1: Au 1U"
6: Au 30U"
W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

勝特力材料 86-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

NO.	PARTS	MATERIAL	QTY.	FINISHING	X. ±0.35	X.* ±2°	UNITS	mm			
					.X ±0.3	.X.* ±1°	MAT'L				
3	HOUSING	PBT/LCP+(30%GF)	1	UL 94V-0	.XX ±0.25	.XX*	SEE NOTE	TITLE:			
2	SHELL	COPPER ALLOY/ C2680	1	PLATED Tin	.XXX ±0.15	.XXX*	SEE NOTE	MICRO USB 5P/F SMT B型(有柱)			
1	TERMINAL	COPPER ALLOY/ C5191	5	Plated Gold	DR: Sandy 2009/8/17				PART NO.:		
					CHKD: Sandy 2009/8/18				DWG NO.:		
					APPD:				AII-H81		
					SCALE				SHEET	REV.	ENGINEERING
					1:1				1/1	A	DRAWING