




PAD CONNECTOR

2.0 mm pitch/Wire-to-Board connectors/Crimp style and Mating style

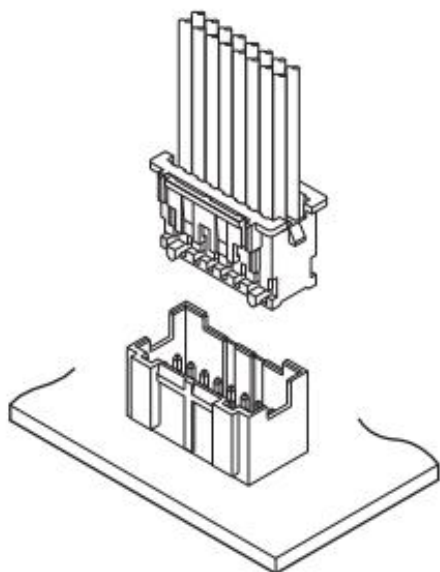

This is a 2.0 mm pitch wire-to-board connector with dual-row structure and secure locking mechanism.

- Secure lock mechanism
- High reliability contact
- Insertion guide structure
- Polarity bosses are available.

Standards

W: Recognized E 60389


△: R50053749

Specifications


- Current rating: 3 A AC/DC (AWG #22)
 - Voltage rating: 250 V AC/DC
 - Temperature range: -25°C to +85°C
(including temperature rise in applying electrical current)
 - Contact resistance:
 - Initial value/ 10 mΩ max.
 - After environmental tests/ 20 mΩ max.
 - Insulation resistance: 1,000 MΩ min.
 - Withstanding voltage:
 - There shall be no breakdown or flashover while applying 800 VAC for one minute.
 - Applicable wire range:
 - Conductor size/ AWG #28 to AWG #22
 - Insulation O.D./ ϕ 0.76 mm to ϕ 1.5 mm
 - Applicable PC board thickness: 1.6 mm
- * In using the products, refer to "Handling Precautions for Terminals and Connectors" described on our website (Technical documents of Product information page).
- * RoHS2 compliance
- * Dimensional unit: mm
- * Contact JST for details.

PC board layout and Assembly layout

Top entry type

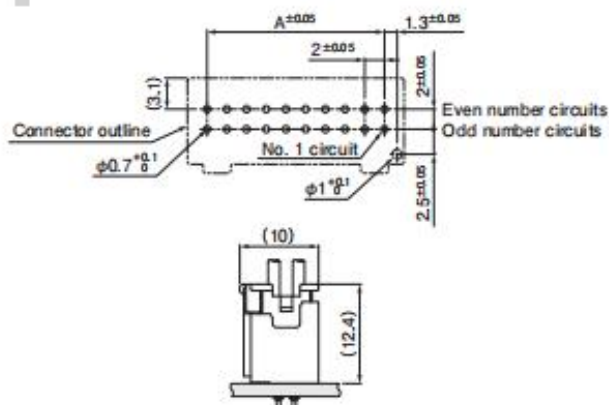

Side entry type


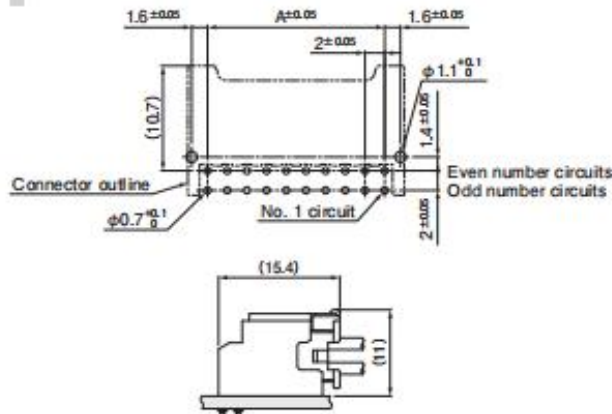


- Note: 1. The figure of PC board layout is the figure viewed from the connector mounting side.
 2. Dimension A: See "Header" section on page 3.
 3. Tolerance for the PCB hole pitch shall be ± 0.05 , and shall not accumulate more than ± 0.05 .
 4. Hole dimensions differ according to the type of PC board and piercing method.
 5. Please contact JST for details as the dimensions shown in the above figure are reference values.

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<https://www.100y.com.tw>

PAD CONNECTOR

Contact

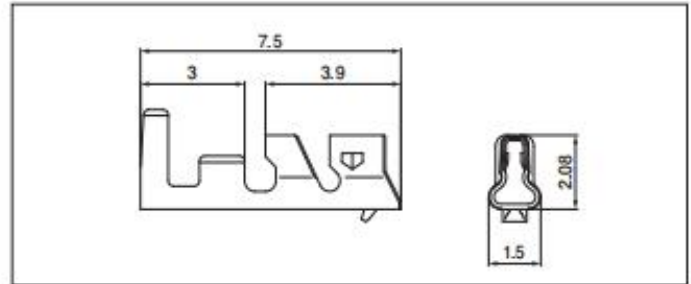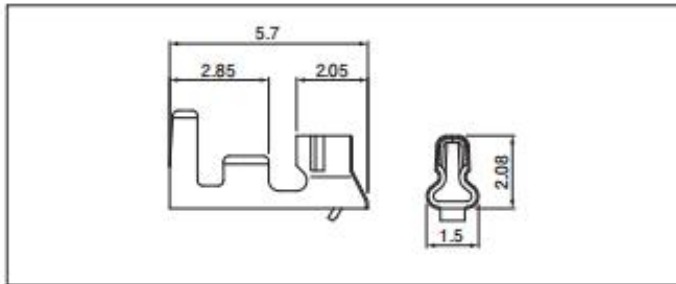

Model No.	Applicable wire range		Q'ty/ reel
	Conductor size AWG (mm ²)	Insulation O.D. (mm)	
SPH-002T-P0.5L	#28 to #24 (0.08 to 0.22)	0.8 to 1.5	8,000
SPH-001T-P0.5L	#26 to #22 (0.13 to 0.33)	1.0 to 1.5	

Model No.	Applicable wire range		Q'ty/ reel
	Conductor size AWG (mm ²)	Insulation O.D. (mm)	
SPND-002T-C0.5	#28 to #24 (0.08 to 0.22)	0.76 to 1.5	8,000
SPND-001T-C0.5	#26 to #22 (0.13 to 0.33)	1.0 to 1.5	

Material and Surface finish, etc.

Phosphor bronze, tin-plated

Material and Surface finish, etc.

Copper alloy, tin-plated

Note: This product has improved insertion and extraction operations.

Crimping machine

Contact	Crimping machine	Applicator	Crimp applicator with dies
SPH-002T-P0.5L	AP-K2N	MKS-L	APLMK SPH002-05L
SPH-001T-P0.5L			APLMK SPH001-05L

Note: Contact JST for fully automatic crimping applicator.


Crimping machine

Contact	Crimping machine	Applicator	Crimp applicator with dies
SPND-002T-C0.5	AP-K2N	MKS-L	APLMK SPAD/ND002-05
SPND-001T-C0.5			APLMK SPND001-05


Note: Contact JST for fully automatic crimping applicator.

Housing


<10 to 14 circuits>

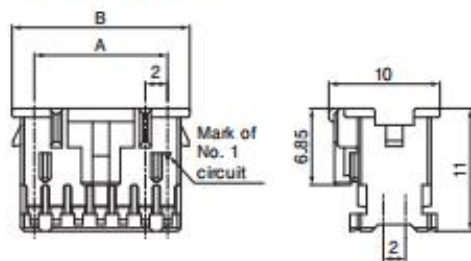

<16 to 24 circuits>

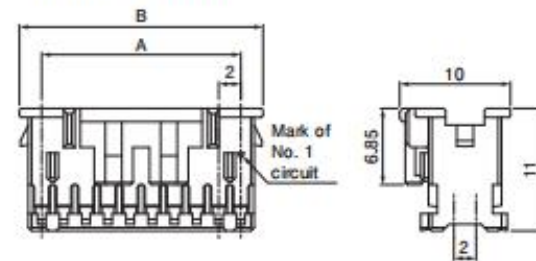

<40 circuits>

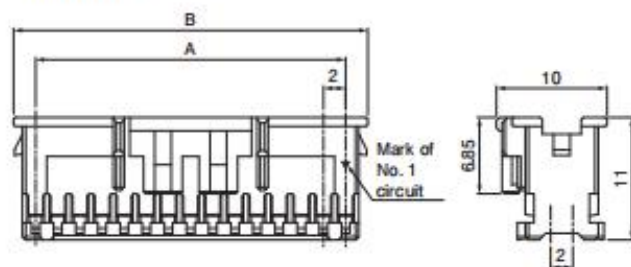

No. of circuits	Model No.	Dimensions (mm)		Q'ty/bag
		A	B	
10	PADP-10V-1-S	8.0	12.0	1,000
12	PADP-12V-1-S	10.0	14.0	1,000
14	PADP-14V-1-S	12.0	16.0	1,000
16	PADP-16V-1-S	14.0	18.0	1,000
20	PADP-20V-1-S	18.0	22.0	1,000
22	PADP-22V-1-S	20.0	24.0	1,000
24	PADP-24V-1-S	22.0	26.0	1,000
40	*PADP-40V-1-S	38.0	42.0	500

Material and Surface finish, etc.

PA 66, UL94V-0, natural(white)

Note: Product marked with an asterisk (*) is not TÜV-listed.


勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<https://www.100y.com.tw>

PAD CONNECTOR


Header

Top entry type


<10 to 14 circuits>

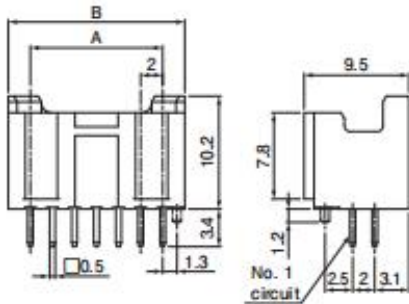

<16 to 24 circuits>

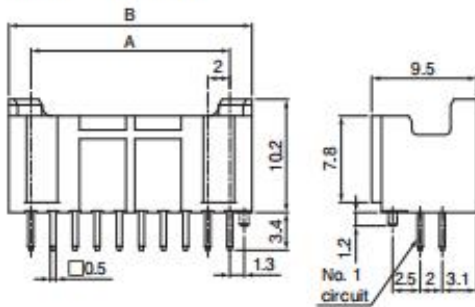


<40 circuits>

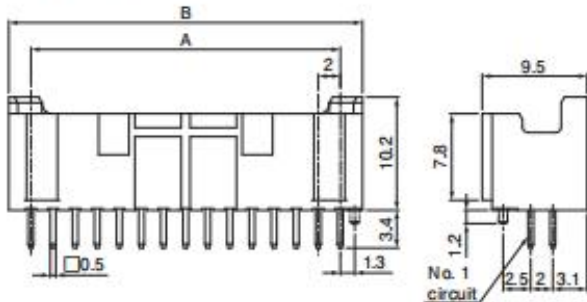


Side entry type

<10 to 14 circuits>

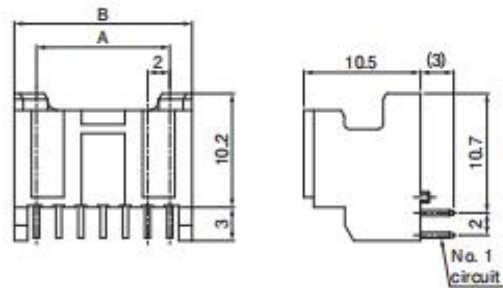

<16 to 24 circuits>

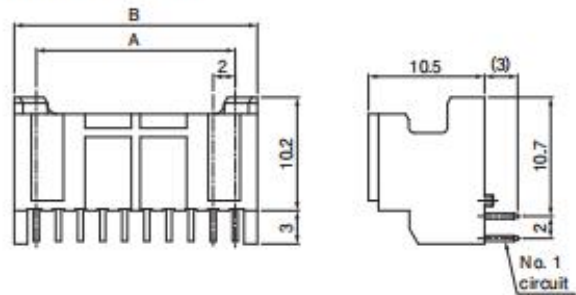

No. of circuits	Model No.			Dimensions (mm)		Q'ty/box	
	Top entry type		Side entry type	A	B	Top entry type	Side entry type
	Without a boss	With a boss					
10	B10B-PADSS-F	B10B-PADSS-1F	S10B-PADSS-1	8.0	12.0	400	504
12	B12B-PADSS-F	B12B-PADSS-1F	S12B-PADSS-1	10.0	14.0	300	420
14	B14B-PADSS-F	B14B-PADSS-1F	S14B-PADSS-1	12.0	16.0	300	364
16	B16B-PADSS-F	B16B-PADSS-1F	S16B-PADSS-1	14.0	18.0	200	336
20	B20B-PADSS-F	B20B-PADSS-1F	S20B-PADSS-1	18.0	22.0	150	280
22	B22B-PADSS-F	B22B-PADSS-1F	—	20.0	24.0	150	—
24	B24B-PADSS-F	B24B-PADSS-1F	S24B-PADSS-1	22.0	26.0	150	224
40	—	*B40B-PADSS-1F	—	38.0	42.0	100	—

Material and Surface finish, etc.

Post: Copper alloy, copper-undercoated, tin-plated

Wafer: Top entry type/PA 66 (Glass-filled), UL94V-0, natural (ivory)

Side entry type/PBT (Glass-filled), UL94V-0, natural (white)

Note: 1. Product marked with an asterisk (*) is not TÜV-listed.

2. This product displays (LF) (SN) on a label.

勝特力電材超市-龍山店 886-3-5773766

勝特力電材超市-光復店 886-3-5729570

勝特力電子(上海) 86-21-34970699

勝特力電子(深圳) 86-755-83298787

<https://www.100y.com.tw>

PAD CONNECTOR

Model number allocation

Contact

S PH - 002 T - P 0.5 L		S PND - 002 T - C 0.5	
Supply form: Strip form		Supply form: Strip form	
Series name		Series name	
Applicable wire range:		Applicable wire range:	
002...AWG #28 to AWG #24		002...AWG #28 to AWG #24	
001...AWG #26 to AWG #22		001...AWG #26 to AWG #22	
Surface finish: Tin-plated		Surface finish: Tin-plated	
Material: Phosphor bronze		Material: Copper alloy	
Applicable post size		Applicable post size	
Auxiliary symbol			

Housing

PAD P - 16 V - 1 - S	
Series name	
Type: Socket housing	
No. of circuits	
Flammability: UL94V-0	
Auxiliary symbol	
Color: S...Natural (White), K...Black, R...Red, Y...Yellow, E...Blue, M...Green, L...Lemon yellow	

Header (Top entry type)

B 16 B - PAD S S - 1 F	
Header type: Top entry type	
No. of circuits	
Assembly product	
Series name	
Color: S...Natural (Ivory), K...Black, R...Red, Y...Yellow, E...Blue, M...Green, L...Lemon yellow	
Clinched (Kinked) / Not clinched: Straight	
Presence of boss: Blank...Without boss, 1...With boss	
Auxiliary symbol	

Header (Side entry type)

S 16 B - PAD S S - 1	
Header type: Side entry type	
No. of circuits	
Assembly product	
Series name	
Color: S...Natural (White), K...Black, Y...Yellow, E...Blue, P...Purple	
Clinched (Kinked) / Not clinched: Straight	
Presence of boss: With boss	

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<https://www.100y.com.tw>