


## VIP-3/SC/D25SUB/M

Order No.: 2315133

The illustration shows version VIP-3/SC/D50SUB/M

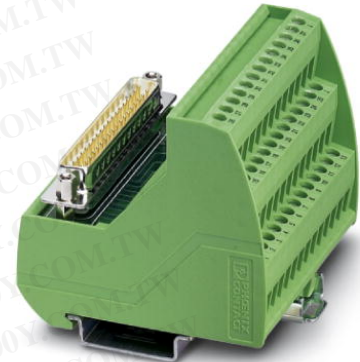

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2315133>

VARIOFACE module, with screw connection and male D-Subminiature pin strip, for mounting on NS 35/7.5 or NS 32, 25-pos.

### Commercial data

EAN	4046356312929
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.152 KG
Catalog page information	Page 285 (IF-2009)

### Product notes

WEEE/RoHS-compliant since:  
09/02/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Nominal voltage $U_N$	125 V AC/DC
Max. current carrying capacity per branch	2 A
Number of positions	25
Width	57.4 mm
Height	62 mm

Depth	69 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	II

#### Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M 3
Connection 2	D-SUB connection
Number of positions	25

#### Certificates / Approvals



Certification CSA, CUL, UL

#### CSA

Nominal voltage $U_N$	105 V
Nominal current $I_N$	2 A
AWG/kcmil	30-12

**CUL**

Nominal voltage $U_N$	125 V
Nominal current $I_N$	2 A
AWG/kcmil	30-12

**UL**

Nominal voltage $U_N$	125 V
Nominal current $I_N$	2 A
AWG/kcmil	30-12

**Accessories**

Item	Designation	Description
------	-------------	-------------

**Cable/conductor**

2302421	CABLE D-SUB-B-B-S/.../.../...	Shielded round cable, assembled with two D-SUB female connectors, variable cable length
2302340	CABLE D-SUB-S/.../.../...	Shielded round cable, assembled with one D-SUB male and one female connector, variable cable length
2305473	CABLE-D25SUB/B/B/100/ KONFEK/S	Assembled, shielded circular cable, with D-SUB socket strip, 25-pos. from both sides, cable length: 1m
2305486	CABLE-D25SUB/B/B/200/ KONFEK/S	Assembled, shielded circular cable, with D-SUB socket strip, 25-pos. from both sides, cable length: 2m
2305499	CABLE-D25SUB/B/B/300/ KONFEK/S	Assembled, shielded circular cable, with D-SUB socket strip, 25-pos. from both sides, cable length: 3 m
2302120	CABLE-D25SUB/B/S/ 50/ KONFEK/S	Round shielded cable set, with 25-pos. D-SUB female and male connectors, cable length: 0.5 m
2302133	CABLE-D25SUB/B/S/100/ KONFEK/S	Round shielded cable set, with 25-pos. D-SUB female and male connectors, cable length: 1 m
2302146	CABLE-D25SUB/B/S/150/ KONFEK/S	Round shielded cable set, with 25-pos. D-SUB female and male connectors, cable length: 1.5 m
2302159	CABLE-D25SUB/B/S/200/ KONFEK/S	Round shielded cable set, with 25-pos. D-SUB female and male connectors, cable length: 2 m
2302162	CABLE-D25SUB/B/S/300/ KONFEK/S	Round shielded cable set, with 25-pos. D-SUB female and male connectors, cable length: 3 m
2302175	CABLE-D25SUB/B/S/400/ KONFEK/S	Round shielded cable set, with 25-pos. D-SUB female and male connectors, cable length: 4 m
2302188	CABLE-D25SUB/B/S/600/ KONFEK/S	Round shielded cable set, with 25-pos. D-SUB female and male connectors, cable length: 6 m

**General**

5147777	BLUEMARK X1	Printers with UV technology for printing plastic labels in UniCard format.
---------	-------------	--

<b>Marking</b>		
0818111	UC-TM 4	UniCard sheets, for labeling terminal blocks using a Zack marker strip groove, 120-section, can be labeled with BLUEMARK X1 and CMS-P1-PLOTTER, color: White
0818085	UC-TM 6	UniCard sheets, for labeling terminal blocks using Zack marker strip groove,80-section, labeling with BLUEMARK X1 and CMS-P1-PLOTTER, color: White
0811862	ZB 22:UNBEDRUCKT	Zack marker strip, unprinted: 4-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks, for a terminal width of 22 mm, color: White
0809793	ZB 5,08:UNBEDRUCKT	Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks per pack

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;