
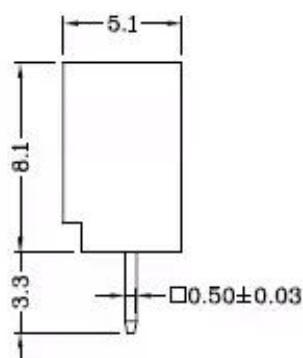
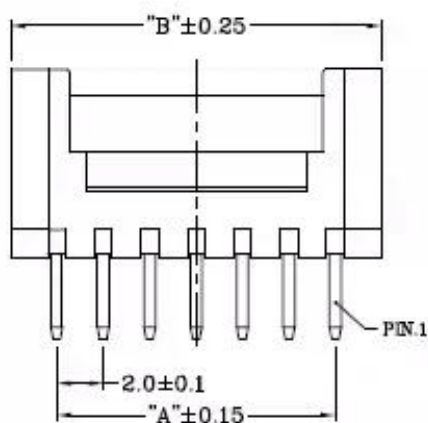


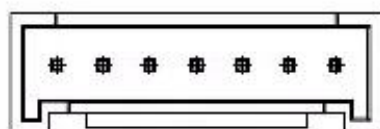


■ 技术参数 SPECIFICATIONS

- ◆ 适用线规: AWG#30~#22
Applicable Wire: AWG#30~#22
- ◆ 额定电压: 125V DC,AC(rms)
Rated voltage: 125V DC,AC(rms)
- ◆ 额定电流: 2A (AWG #22)
Rated Current: 2A (AWG #22)
- ◆ 耐压值: 1000V AC/minute
Withstand voltage: 1000V AC/min.
- ◆ 工作温度: -25°C ~ +85°C
Working Temp : -25°C ~ +85°C
- ◆ 绝缘电阻: $\geq 1000 \text{ M}\Omega$
Insulation resistance: $\geq 1000 \text{ M}\Omega$
- ◆ 接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

■ 材料 MATERIAL

- ◆ 胶壳: 尼龙66, UL94-V0
Housing: Nylon66, UL94-V0



P.C.B. Layout

	2P	3P	4P	5P	6P	7P	8P	9P	10P	11P	12P	13P	14P	15P	16P
DIM.A	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	30.0
DIM.B	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	30.0	32.0	34.0