



PLT Series Input Type / Output Type


INPUT TYPE
OUTPUT TYPE

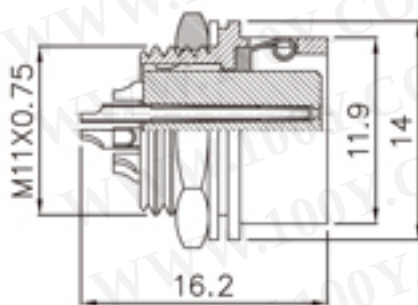


PLT-11-RF

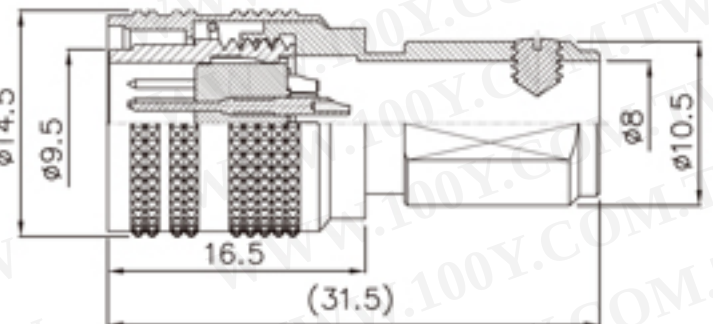

PLT-11-PM

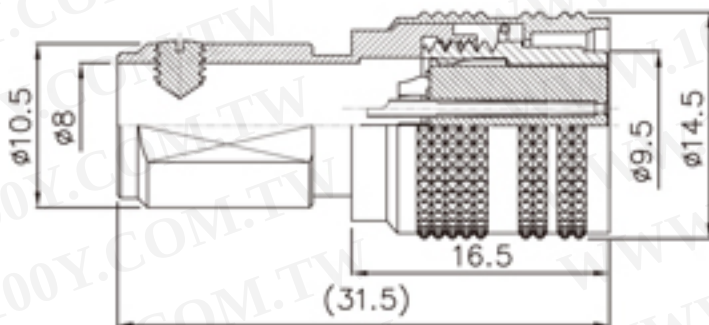


PLT-11-PF

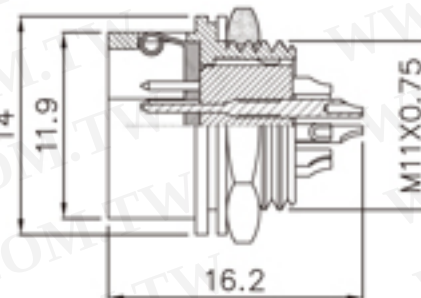



PLT-11-RM

ACCESSORY:

Cable Clamp



Rubber Pipe

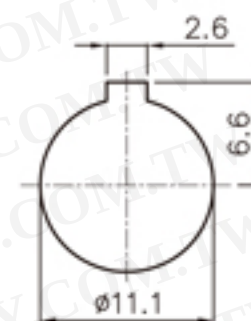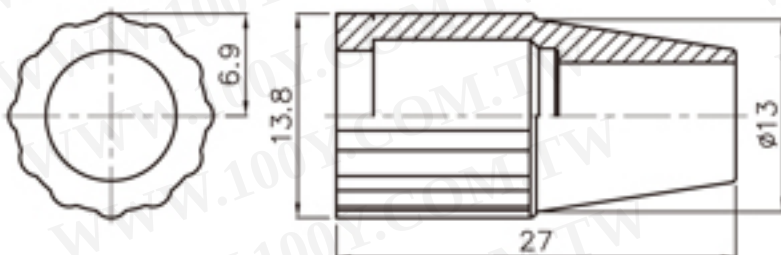

MOUNT HOLE

◆ No. of contacts	10	12				
Contacts Configuration						
Rated current / voltage	2A DC250V	2A DC250V				
Operation limit voltage (AC.V.rms)	125	125				
Withstanding voltage (AC.V.rms) 1 minute	125	125				
Insulation resistance (MΩ MIN.) at DC 500V	200	200				
Contact resistance (MΩ MAX.) at DC 1A	30	30				