


SHELL SIZE
16


PLT Series - Output Type



OUTPUT TYPE

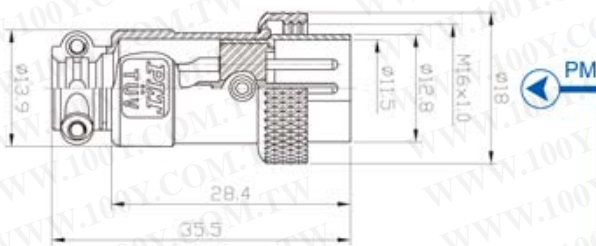

PLT-16-PM



PLT-16-RF



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

| ◆ No. of contacts | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|--|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Contacts Configuration | | | | | | | | | |
| Rated current / voltage | 5A 125V | 5A 125V | 5A 125V | 5A 125V | 5A 125V | 5A 125V | 5A 125V | 1A 125V | 1A 125V |
| Operation limit voltage (AC.V.rms) | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 |
| Withstanding voltage (AC.V.rms) 1 minute | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| Insulation resistance (MΩ MIN.) at DC 500V | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| Contact resistance (MΩ MAX.) at DC 1A | 15 | 15 | 15 | 20 | 20 | 20 | 20 | 20 | 20 |
| Solder inter diameter | 1.4 | 1.4 | 1.4 | 1.2 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 |