


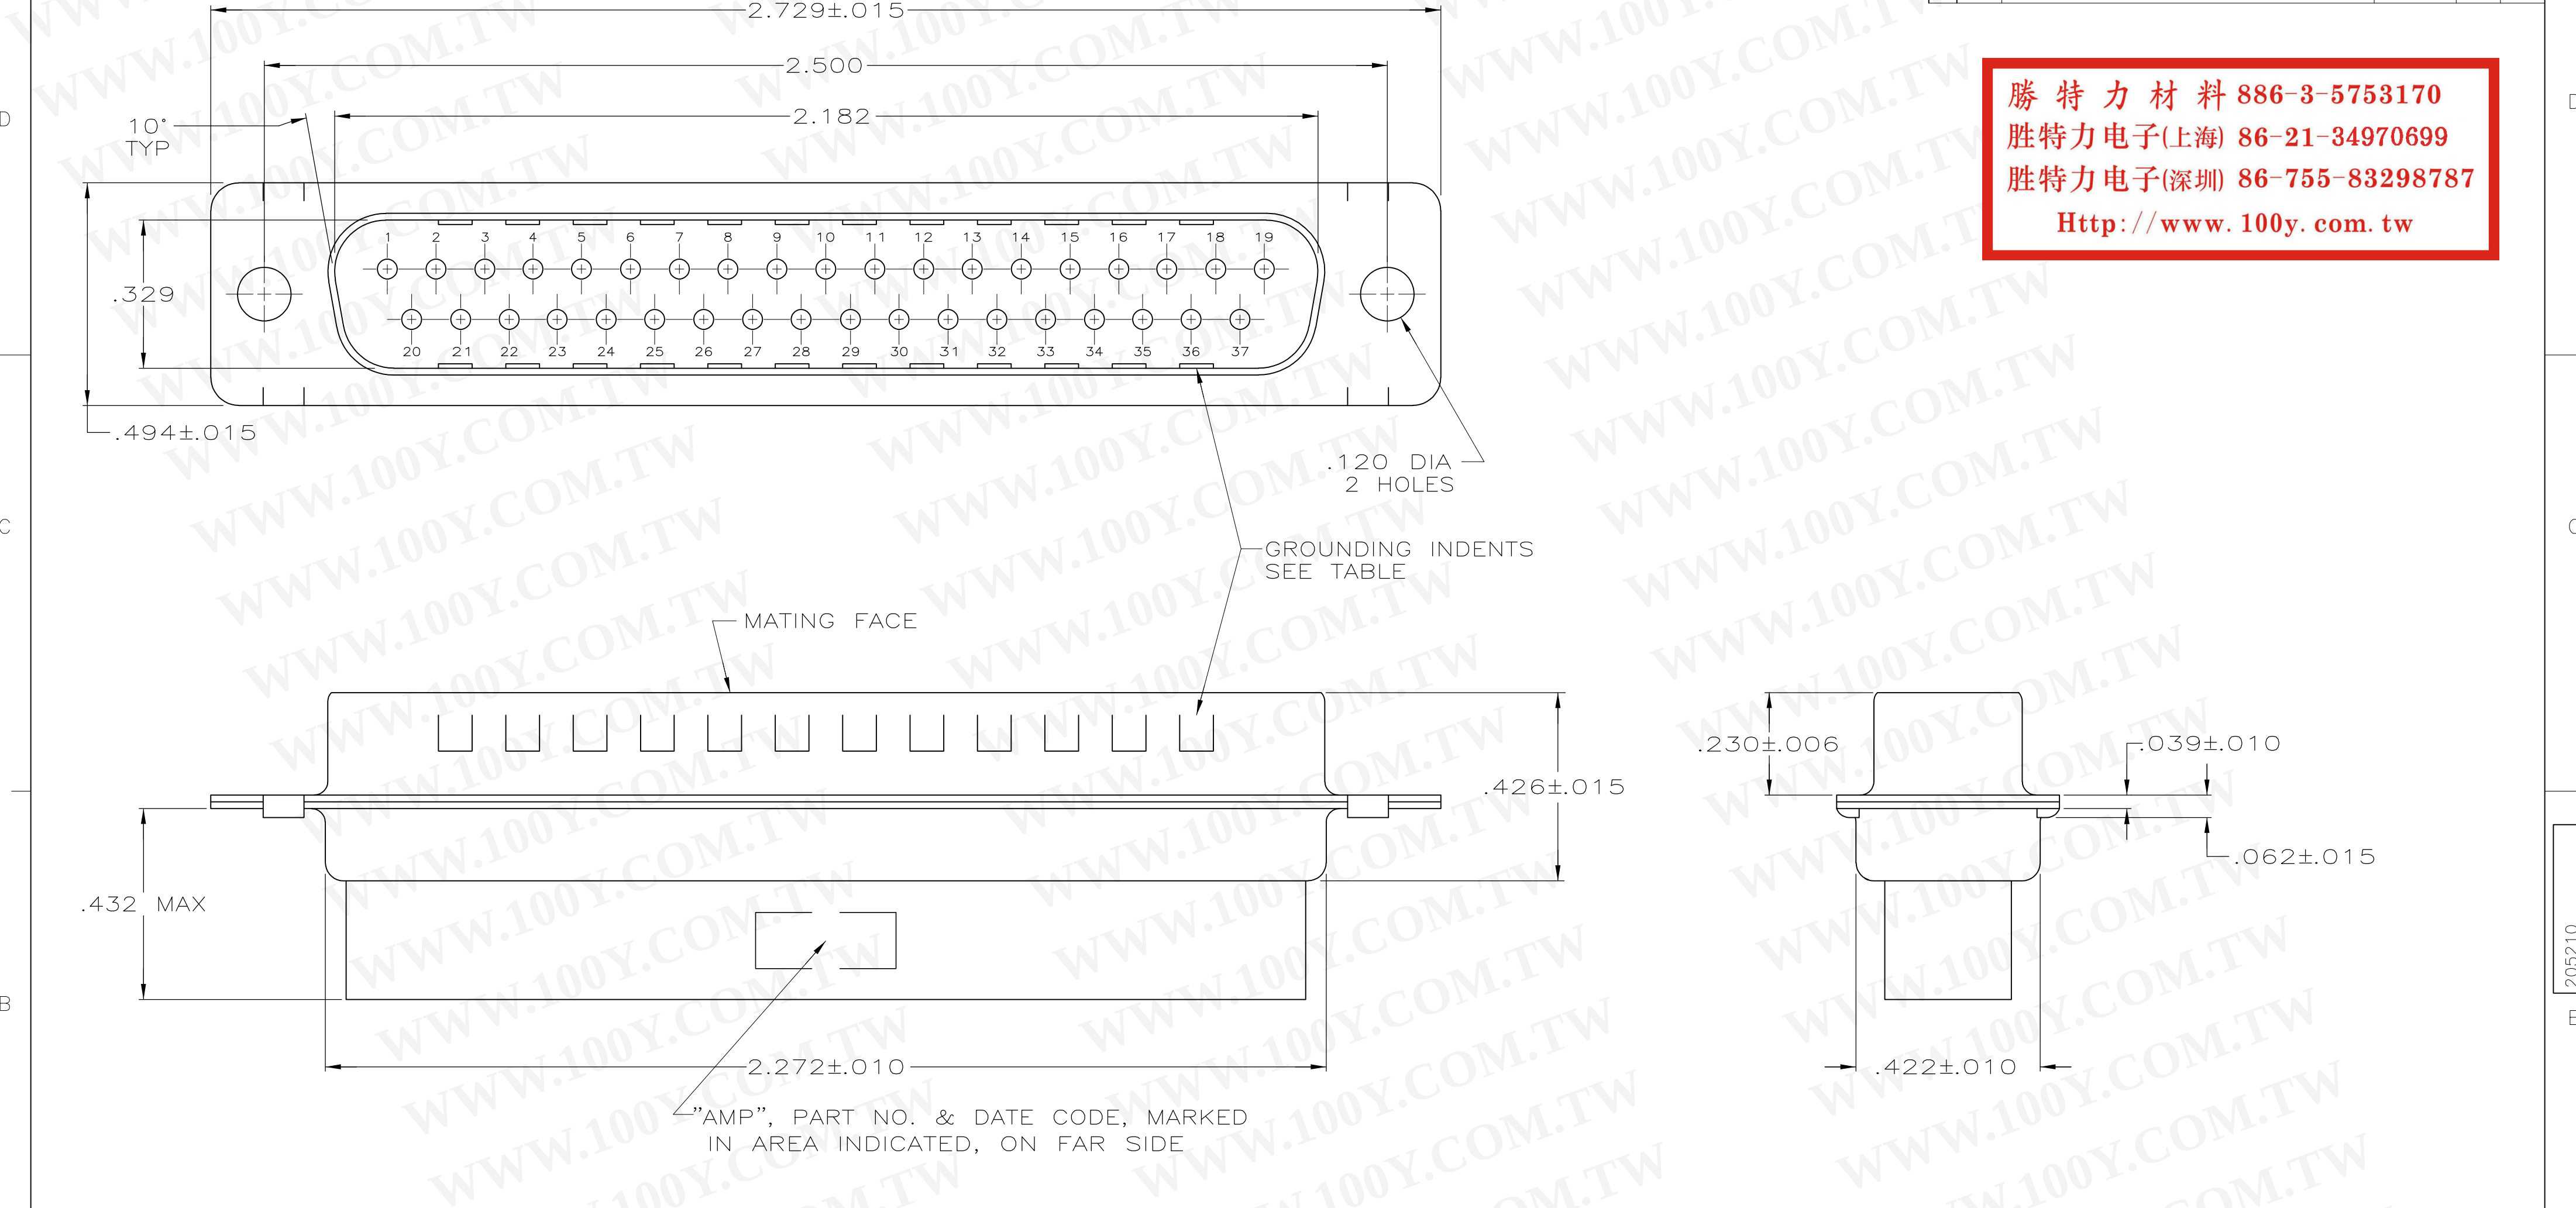

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

- CONNECTOR ACCEPTS SIZE 20 DF PIN CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- CONNECTOR COMPLIES WITH 108-40005 WHERE APPLICABLE.
- MOLDED PART MATERIAL: NYLON, FLAME RETARDANT, 94V-0 RATED, GLASS FILLED, BLACK.
- SHELL MATERIAL: STEEL PER ASTM A109.
- ZINC PLATED PER ASTM B633; TYPE II; CLASS SC1; YELLOW CHROMATE.
- TIN OR TIN-LEAD PLATED OVER COPPER UNDERPLATE.
- TIN PLATED OVER COPPER UNDERPLATE.
- ZINC PLATED .000200-.000400 THICK, YELLOW TRIVALENT CHROMIUM CHROMATE COATING.

OBSOLETE	STANDARD	8	NO	205210-8
	STANDARD	7	NO	205210-7
	SMALL PACK	5	NO	205210-6
	STANDARD	7	YES	205210-3
	STANDARD	6	NO	205210-2
OBSOLETE	STANDARD	5	NO	205210-1
PACKAGING TYPE		SHELL FINISH	GROUNDING INDENTS	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 7-19-85	TE Connectivity	
DIMENSIONS: INCHES		CHK J. GERACE 7-29-85		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD V. KUMAR 7-31-85		
0 PLC ± -		PRODUCT SPEC	NAME PLUG CONNECTOR, SIZE 4, 37 POSITION, AMPLIMITE™ HDP	
1 PLC ± -		APPLICATION SPEC		
2 PLC ± 0.13 [.005]		—	SIZE A2	CAGE CODE 00779
3 PLC ± -		—	DRAWING NO C=205210	RESTRICTED TO
4 PLC ± -		—	SCALE 4:1	SHEET 1 OF 1
ANGLES ± -		WEIGHT -	REV K	
FINISH		CUSTOMER DRAWING		
SHELLS: SEE TABLE				