


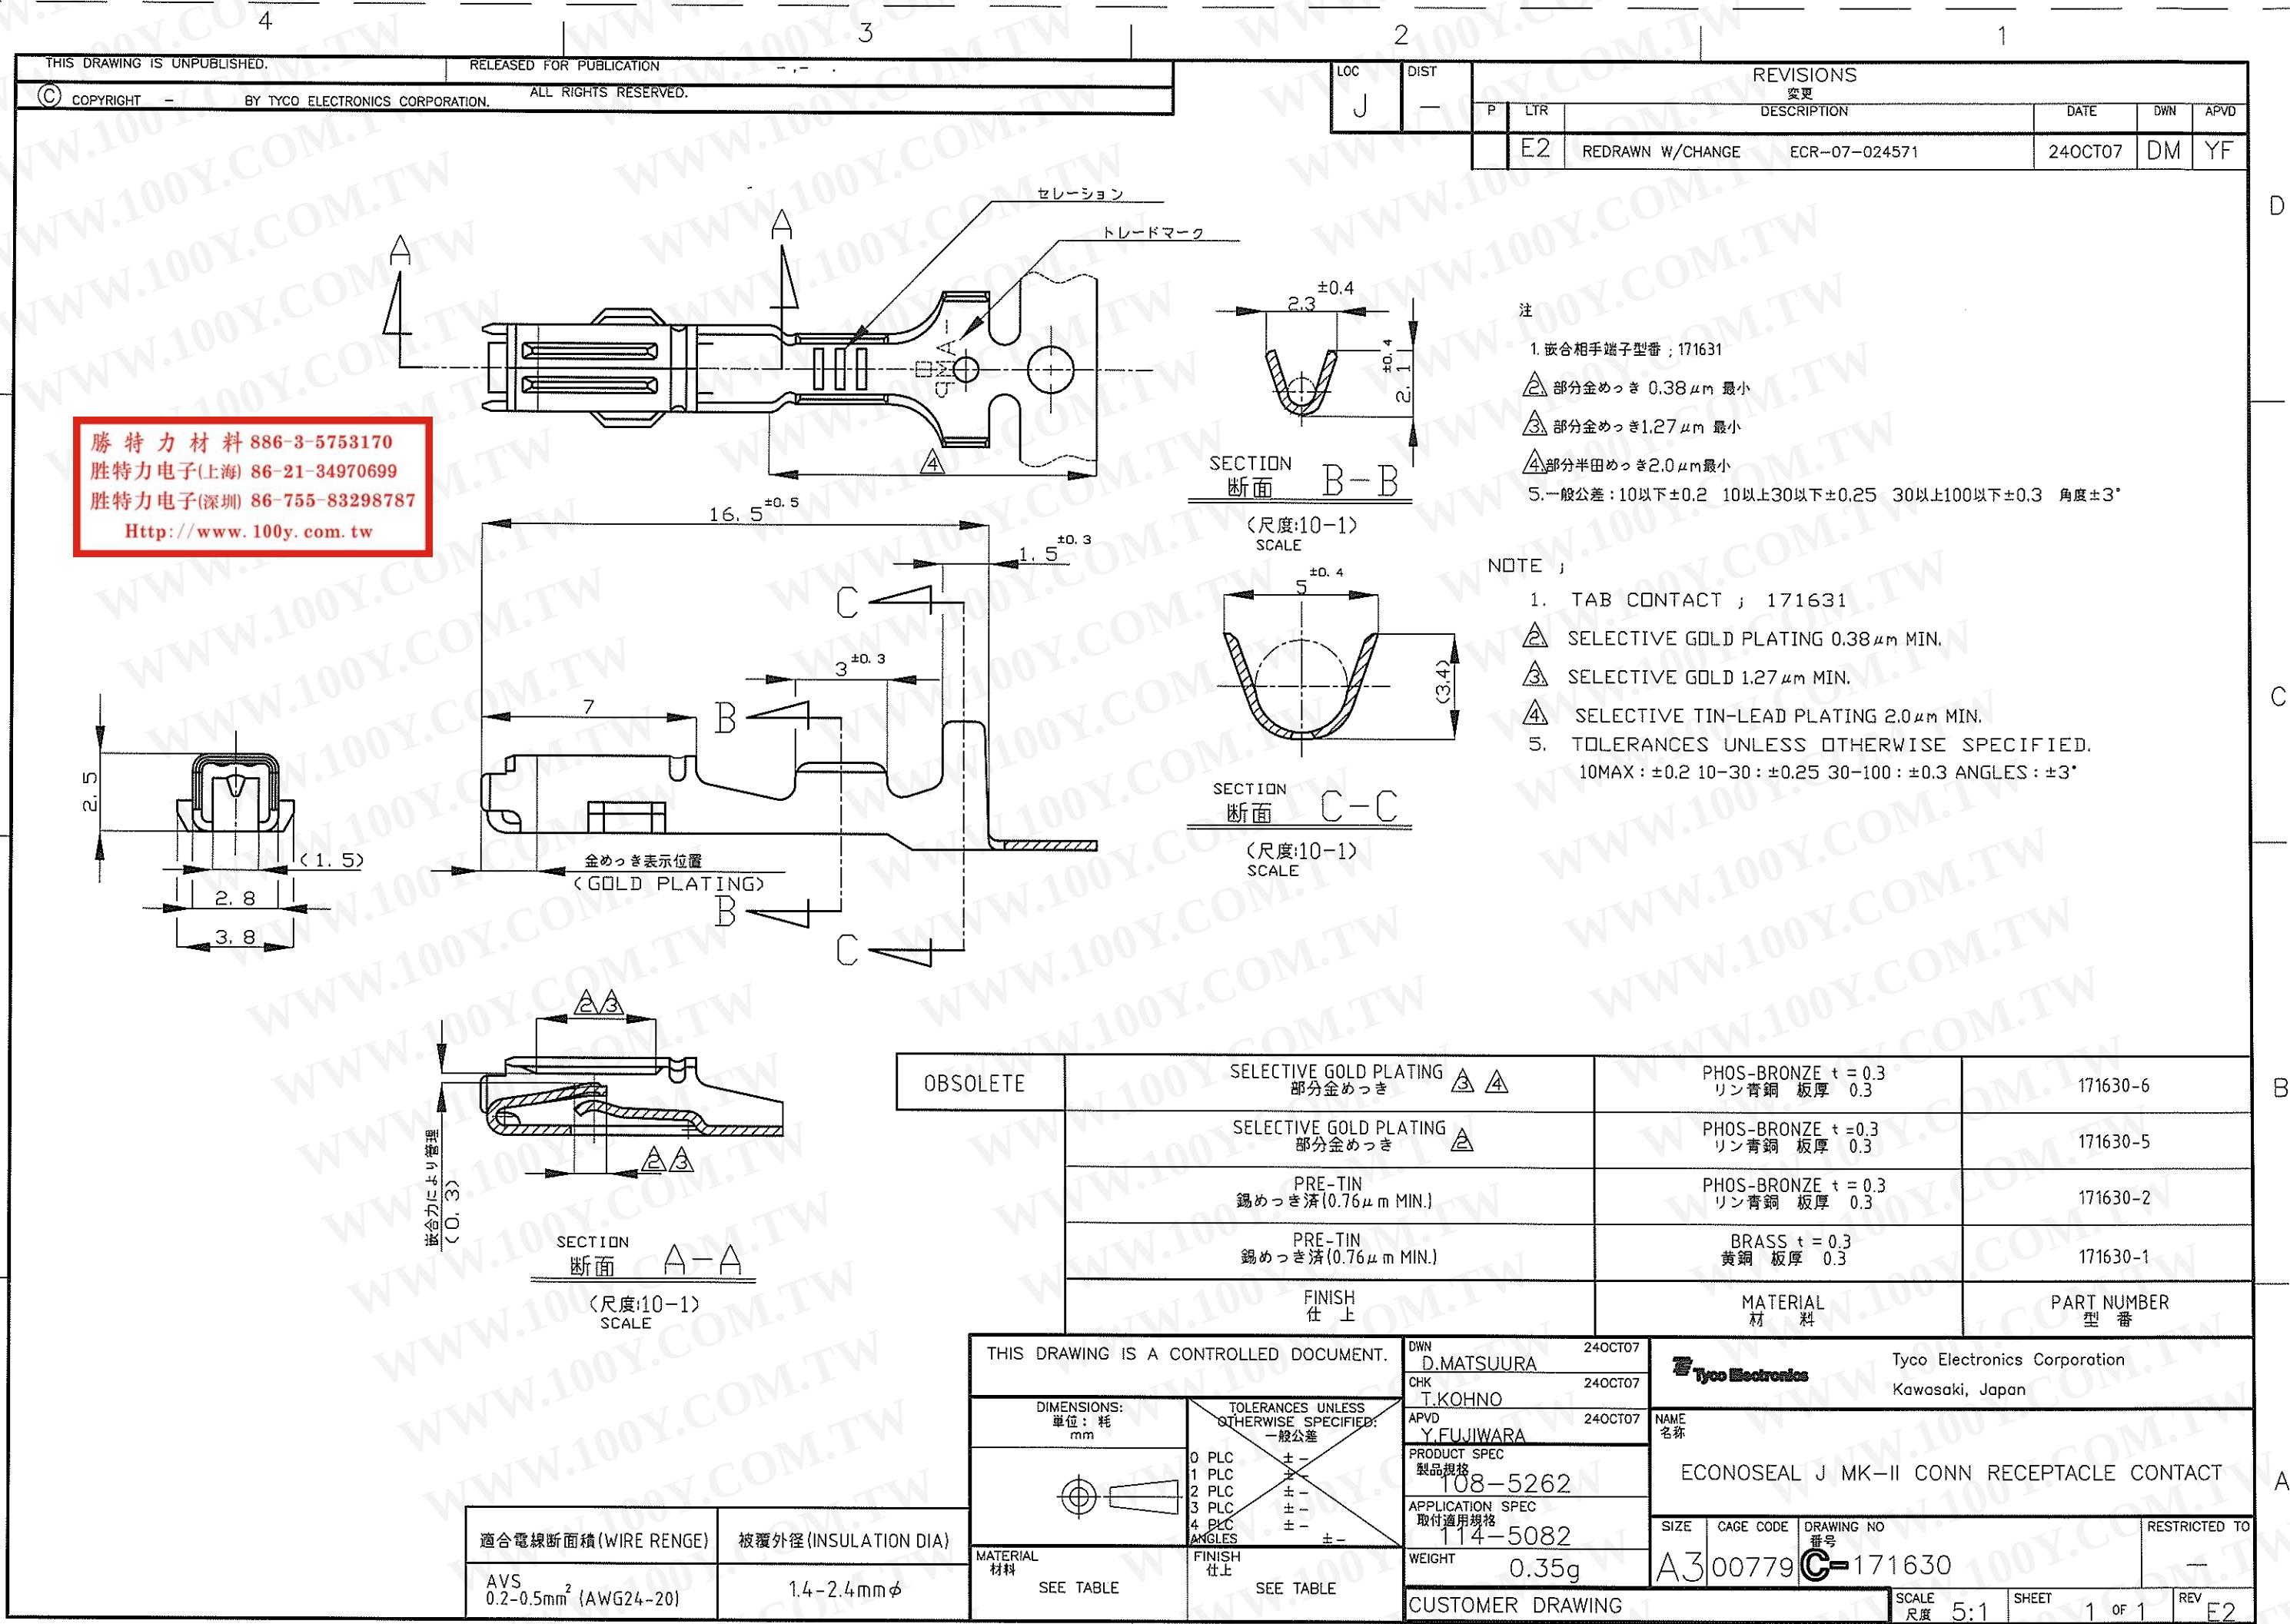

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

注
1. 嵌合相手端子型番 ; 171631
△ 部分金めっき 0.38 μm 最小
△ 部分金めっき 1.27 μm 最小
△ 部分半田めっき 2.0 μm 最小
5. 一般公差 : 10以下 ±0.2 10以上30以下 ±0.25 30以上100以下 ±0.3 角度 ±3°

NOTE ;
1. TAB CONTACT ; 171631
△ SELECTIVE GOLD PLATING 0.38 μm MIN.
△ SELECTIVE GOLD 1.27 μm MIN.
△ SELECTIVE TIN-LEAD PLATING 2.0 μm MIN.
5. TOLERANCES UNLESS OTHERWISE SPECIFIED.
10MAX : ±0.2 10-30 : ±0.25 30-100 : ±0.3 ANGLES : ±3°

OBSOLETE	SELECTIVE GOLD PLATING 部分金めっき △ △	PHOS-BRONZE t = 0.3 リン青銅 板厚 0.3	171630-6
	SELECTIVE GOLD PLATING 部分金めっき △	PHOS-BRONZE t = 0.3 リン青銅 板厚 0.3	171630-5
	PRE-TIN 錫めっき済 (0.76 μm MIN.)	PHOS-BRONZE t = 0.3 リン青銅 板厚 0.3	171630-2
	PRE-TIN 錫めっき済 (0.76 μm MIN.)	BRASS t = 0.3 黄銅 板厚 0.3	171630-1
FINISH 仕上		MATERIAL 材 料	PART NUMBER 型 番

適合電線断面積 (WIRE RENG)	被覆外径 (INSULATION DIA)
AVS 0.2-0.5mm ² (AWG24-20)	1.4-2.4mm φ

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.MATSUURA 24OCT07	Tyco Electronics Tyco Electronics Corporation Kawasaki, Japan	
DIMENSIONS: 単位: 耗 mm		CHK T.KOHNO 24OCT07	NAME 名称	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD Y.FUJIWARA 24OCT07	ECONOSEAL J MK-II CONN RECEPTACLE CONTACT	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 製品規格 108-5262	SIZE A3	
MATERIAL 材料 SEE TABLE		APPLICATION SPEC 取付適用規格 114-5082	CAGE CODE 00779	DRAWING NO C-171630
FINISH 仕上 SEE TABLE		WEIGHT 0.35g	RESTRICTED TO	REV E2
CUSTOMER DRAWING		SCALE 尺度 5:1	SHEET 1 OF 1	