
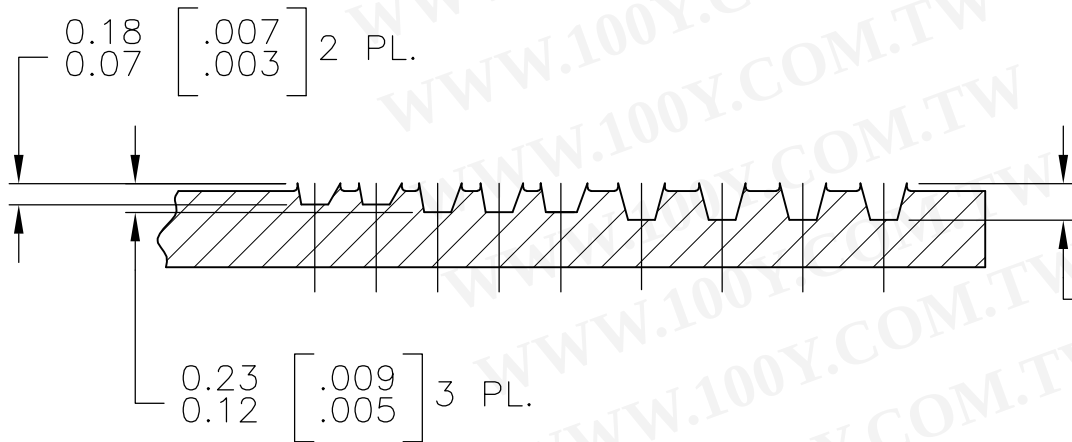
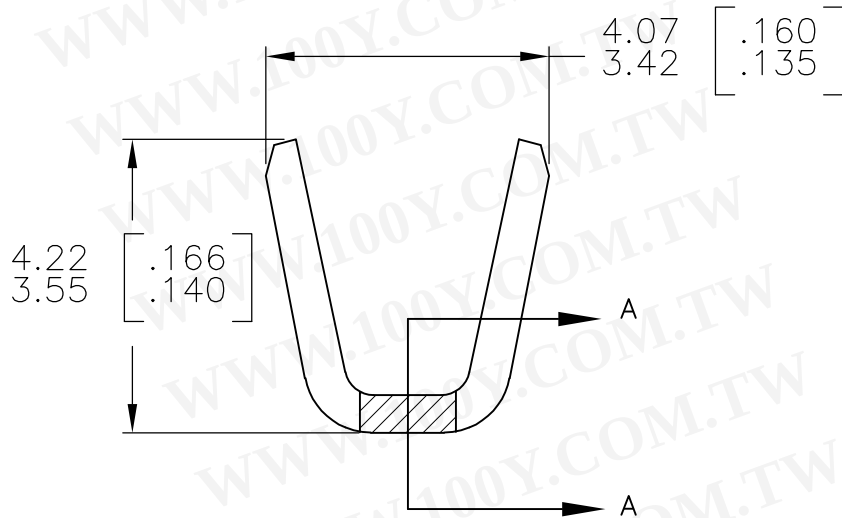
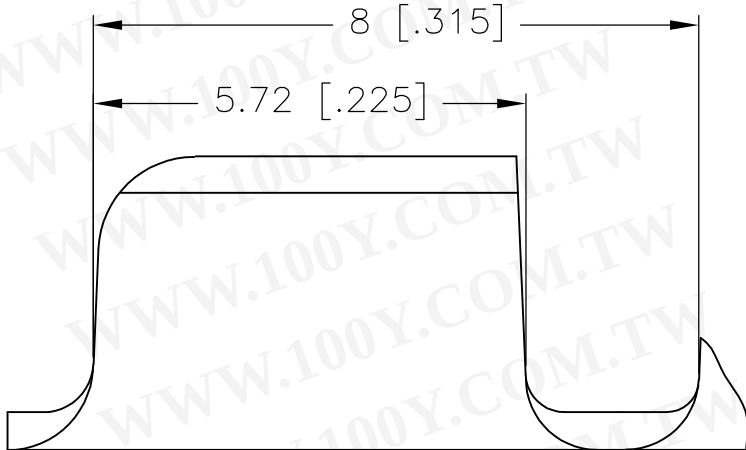


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		E5	REVISED PER ECO-11-004917	11MAR11	RK	HMR

9 AMPLIVAR SERRATIONS

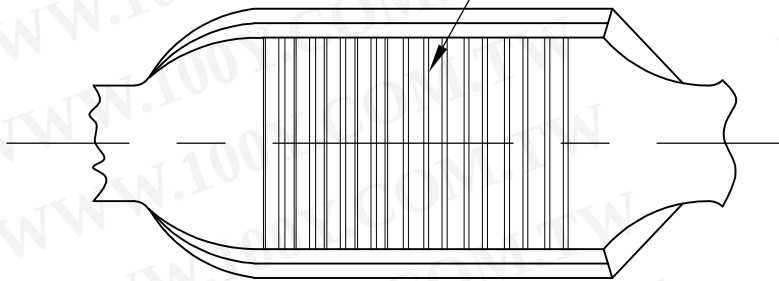

SECTION A-A
SCALE : 20:1


METRIC

- 1 PRODUCT PROVIDED IN STRIP FORM ON REELS; BREAKS MAY BE PRESENT.
- 2 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 3 CRIMP WIDTH: .110 F (AMPLIVAR TYPE)
CRIMP HEIGHT (±.002)=(TOTAL CMA +10,700)/193,400
GENERAL APPLICATION GUIDELINES MUST BE FOLLOWED AS SPECIFIED IN CATALOG # 82221
FOR APPLICATOR INFORMATION CALL: 1-800-722-1111
FOR PRODUCT INFROMATION CALL: 1-800-522-6752

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

62306-2

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA	31JAN06	 TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK G.D.PORTA	-				
		APVD G.D.PORTA	-	NAME SPLICE, AMPLIVAR 1500-5000 CMA			
		PRODUCT SPEC -	-				
MATERIAL REF 0.51±0.03 [.020±.001] BRASS		APPLICATION SPEC 114-2003	-	SIZE A3	CAGE CODE 00779	DRAWING NO C-62306	RESTRICTED TO -
		WEIGHT -	-	CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 1
		TIN PL.				REV E5	