
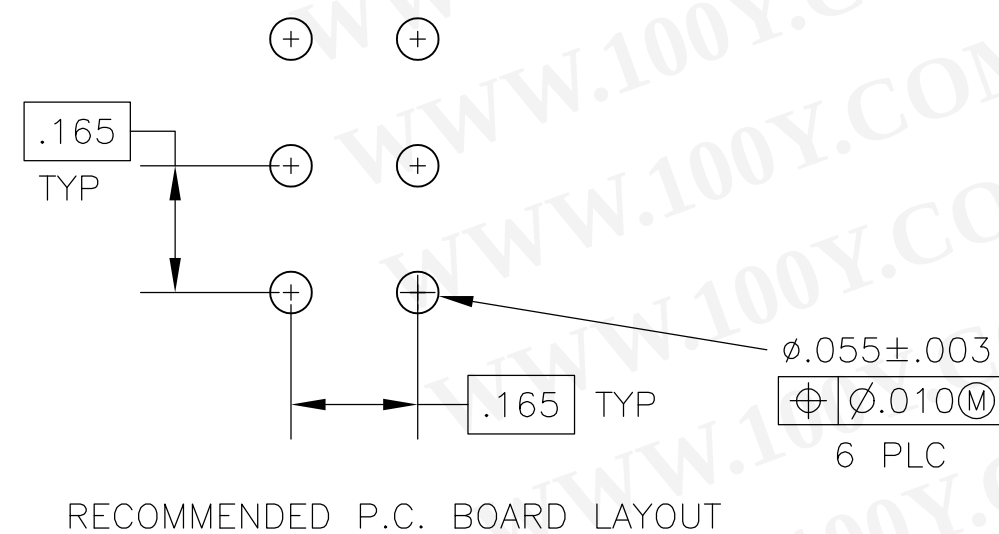
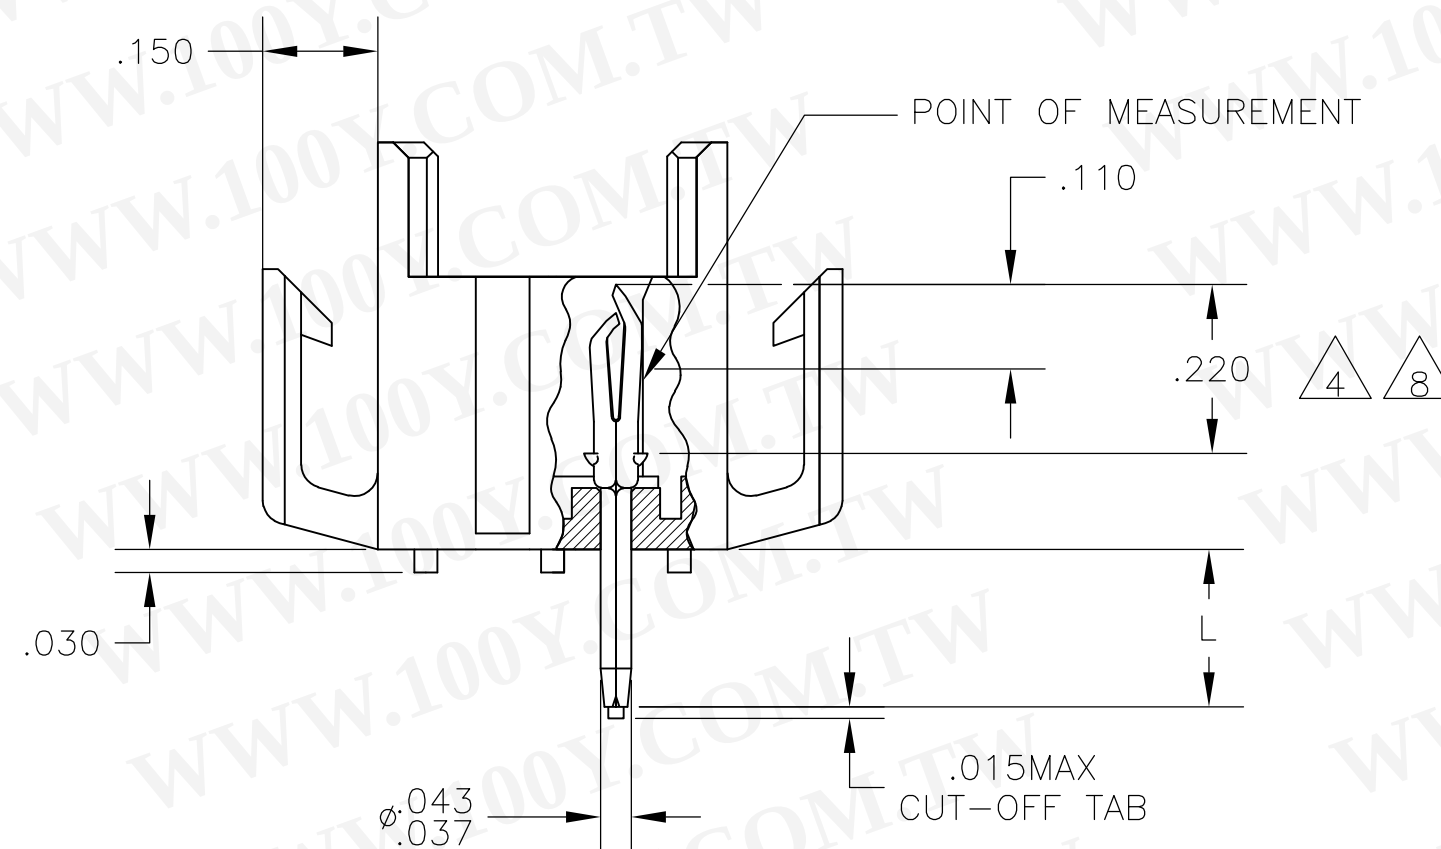


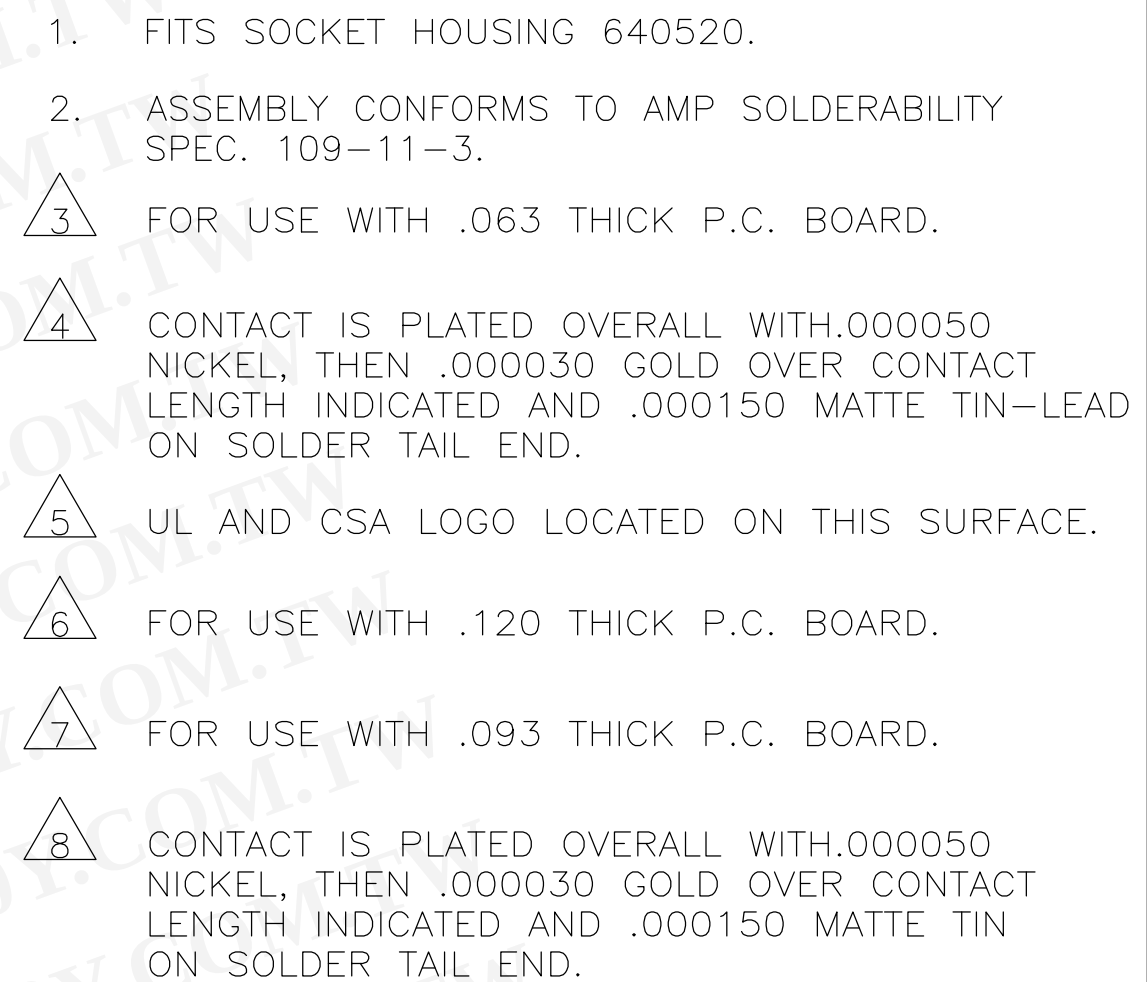

.180		BRICK RED	GOLD		2-640500-6
.210		BRICK RED	GOLD		2-640500-4
.150		BRICK RED	GOLD		2-640500-2
.180		BRICK RED	GOLD		640500-6
.180		BRICK RED	PRE-TIN		640500-5
.210		BRICK RED	GOLD		640500-4
.210		BRICK RED	PRE-TIN		640500-3
.150		BRICK RED	GOLD		640500-2
.150		BRICK RED	PRE-TIN		640500-1
"L" +.010 -.020		HOUSING COLOR	PIN FINISH		PART NUMBER

.010	0.25	.055	1.40	.210	5.33		
.008	0.20	.043	1.09	.180	4.57	-	-
.005	0.13	.037	0.94	.165	4.19	.620	15.75
.003	0.08	.030	0.76	.150	3.81	.530	13.46
.000050	0.00127	.020	0.51	.110	2.79	.455	11.56
.000030	0.00076	.015	0.38	.063	1.60	.220	5.59
IN	MM	IN	MM	IN	MM	IN	MM
CONVERSION TABLE							

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. HUFFMAN 28APR98		 TE Connectivity	
DIMENSIONS: INCHES		CHK R. SWING 28APR98			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. BEDDICK 28APR98		NAME	
		PRODUCT SPEC —		HEADER ASSEMBLY, PIN, 6 POSITION, MR.	
0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 4 PLC ± — ANGLES ± 0°30'		APPLICATION SPEC —		SIZE	CAGE CODE
MATERIAL HOUSING:FLAME RETARDANT NYLON UL 94V-0 FINISH SEE TABLE		WEIGHT —		A2	00779
		CUSTOMER DRAWING		DRAWING NO	C-640500
				SCALE	4:1
				SHEET	1 of 1
				REV	N1