

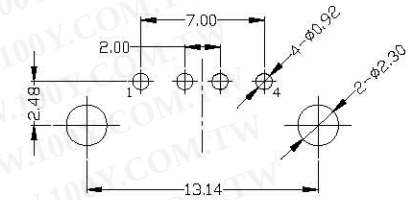
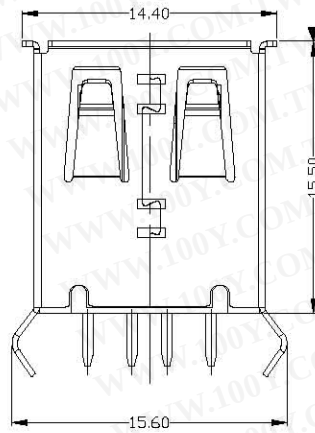





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

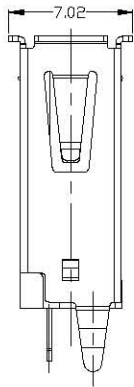

RECOMMEND PCB LAYOUT

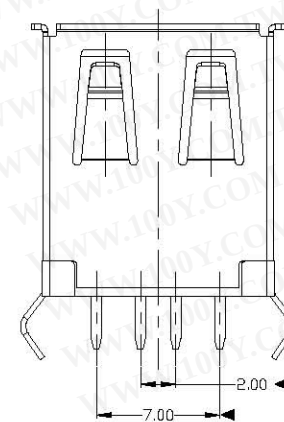

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2.0AMP,30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04*N-1*PA8

1:W/WHITE
2:W/BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Bill of materials:

4	COVER	PBT	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS mm						
3	HOUSING	PBT	1	UL94V-0	.X ±0.3	.X* ±1*	MAT'L						
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	SEE NOTE	TITLE:		PART NO.:			
					.XXX ±0.15	.XXX*	FINISH	USB A/F 180° DIP(15.50)		USAF-04*N-1*PA8			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		SEE NOTE	DR:	gan 2012/7/05		DWG NO.:		
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	CHKD:	gan 2012/7/05		AII-PA8		
						APPD:			SCALE	SHEET	REV.	ENGINEERING DRAWING	