


Customer	
----------	--

	--			
	--			
	--			
	--			B/O
MARK	SIGN DAET	ECN NO.	REVISIONS	REV.

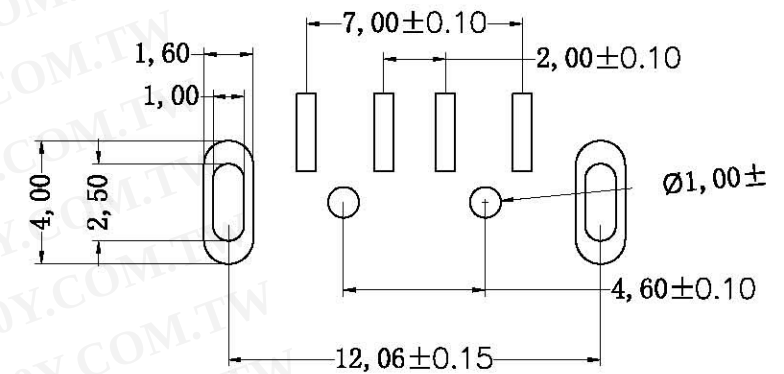

PCB LAYOUT

NOTE:


1.MATERIAL:

- a. HOUSING: PBT GLASS FIBRE UL94 V-0
b. CONTACT: PHOSPHOR BRONZE T=0.25mm
(SURFACE PLATING: Au1u" + Sn100u" + Ni60u")
c. SHEET: BRASS T=0.30mm
(SURFACE PLATING: Ni100u" ~ 120u")

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: $-55^{\circ}/105^{\circ}$

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

		UNIT	DRAWN	TITLE
		MM		USB AM 180° SMT成品
UNLESS OTHERWISE SPECIFIED TOLERANCE .xx ±0.20 .xx ±0.50 .xxx ±0.10 .006 ±1°	SCALE	VERIFIED	PART NO.	
	1:1		CC50-219-012A4	
	DATE	APPROVED	FILE NO.	
	2009-12-25			