

## Data sheet

281-611/24V

Fuse disconnect terminal block with pivoting fuse holder for 5 x 20 mm miniature metric fuse 24 V with blown fuse indication by LED



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Technical data

Package size 50 pieces.

Current intensity EN	10 A
Current intensity EN	6.3 A
Product group	1 (Rail Mounted Terminal Blocks)
for miniature metric fuses	5 x 20 mm
Cross section from [mm <sup>2</sup> ]	0.08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	4 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Connection method	CAGE CLAMP CONNECTION
Measured voltage EN	800 V
Measured shock voltage	8 kV
Pollution degree	3
Current intensity EN "T"	10 A
Current intensity EN "FF" - "T"	6.3 A
Weight	17.26 g
Color	grey
Wiring type	Front-entry
No. of connection Points	2
No. of potentials	2
Height	60 mm
Height	2.36 in
Width	8 mm
Width	0.315 in
Depth	60 mm
Depth	2.36 in
Strip length from	9 mm
Strip length to	10 mm
Strip length	0.37 in

## Data sheet

281-611/24V

**Fuse disconnect terminal block with pivoting fuse holder for 5 x 20 mm miniature metric fuse without blown fuse indication**

Mounting

Safety information 1


TS 35

Nominal voltage and nominal current are defined by the fuse.

## Data sheet

281-611/24V

Fuse disconnect terminal block with pivoting fuse holder for 5 x 20 mm miniature metric fuse without blown fuse indication

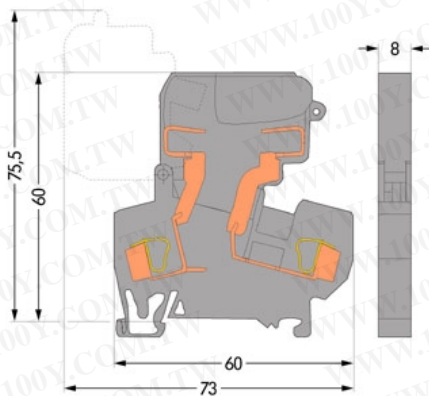

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)