


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

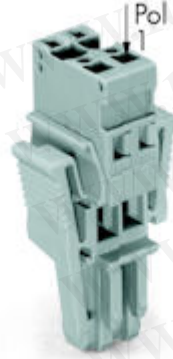

769-104/021-000

1-Conductor female plug with lateral locking levers only to be used for male connectors with codig fingers commoning possibility with miniature adjacent jumpers 4 pole

Packing unit 25 pieces

RoHS compliant

Product group	18 (X-COM-SYSTEM)
pole count	4
Cross section [mm ²]	0.08 - 4 mm ²
Cross section [AWG]	28 - 12 AWG
Connection method	CAGE CLAMP®CONNECTION
Measured voltage EN	500 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	32 A
Weight	14.659 g
Color	grey
Wiring type	Front-entry
No. of connection Points	4
No. of potentials	4
Height	45.2 mm
Height	1.78 in
Width	35.6 mm
Width	1.402 in

Depth	18.3 mm
Depth	0.72 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)