





勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

REV.	DESCRIPTION	DATE
A	RELEASE	Oct. 19, 2001


- 1. MATERIALS AND FINISH**
- 1.1 HOUSING MATERIALS:
 THERMOPLASTIC(UL 94V-0). BLACK.
- 1.2 CONTACTS:
 COPPER ALLOY
- 1.3 PLATING:
 GOLD PLATING ON CONTACT AREA.
 TIN/LEAD PLATING ON SOLDER TAIL.
 UNDER PLATING NICKEL.
- 2. SPECIFICATIONS**
- 2.1 CURRENT RATING:
 1 A MAX.
- 2.2 INSULATION RESISTANCE:
 5000 MΩ MIN AT 500V DC.
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:
 600V (r.m.s) AC FOR 1 MINUTE.
- 2.4 OPERATING TEMPERATURE:
 -40°C ~ +85°C.

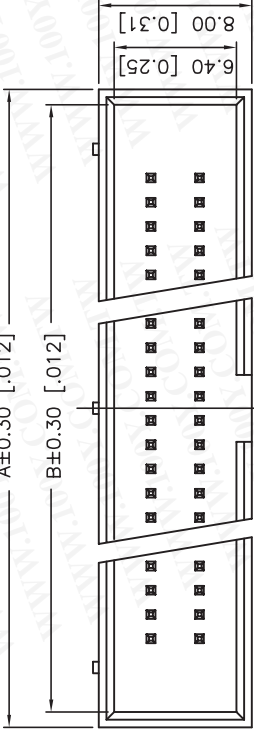

SEC A-A
 SCALE 10:1

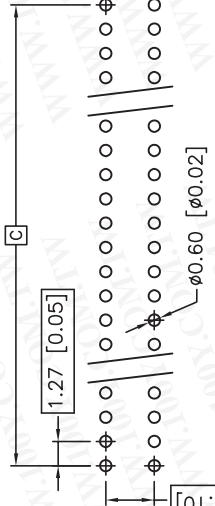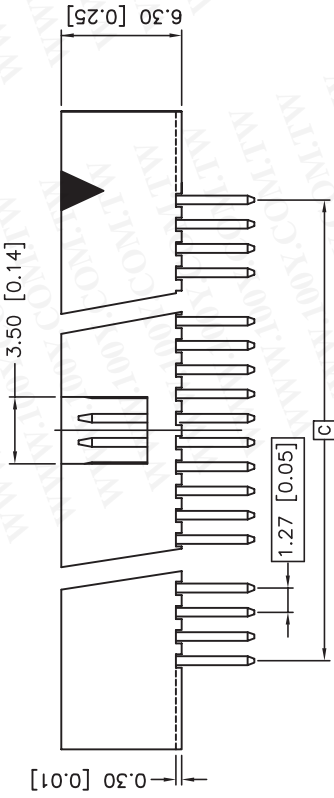

RECOMMEND P.C.B. LAYOUT
 TOLERANCE ± 0.05 [0.002]
 BOTTOM VIEW

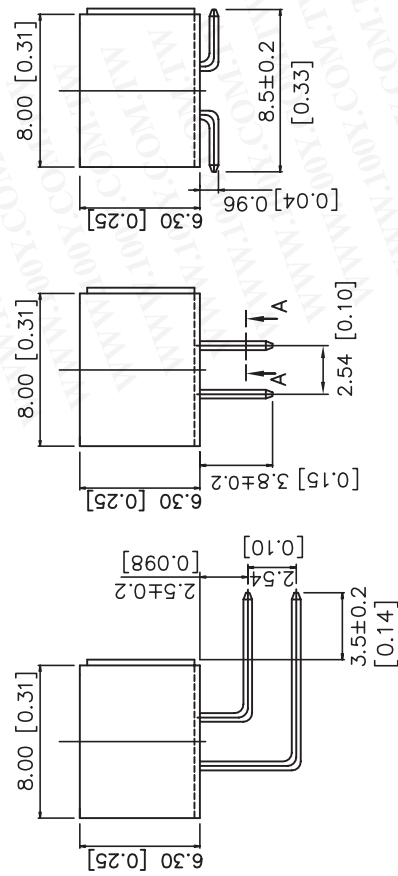

RIGHT ANGLE STRAIGHT SMD TYPE

Number Of Position	DIMENSIONS		
	A	B	C
20	20.70 [0.815]	19.10 [0.752]	11.43 [0.450]
26	24.51 [0.965]	22.91 [0.902]	15.24 [0.600]
30	27.05 [1.065]	25.45 [1.002]	17.78 [0.700]
34	29.59 [1.165]	27.99 [1.102]	20.32 [0.800]
36	30.86 [1.215]	29.26 [1.152]	21.59 [0.850]
40	33.40 [1.315]	31.80 [1.252]	24.13 [0.950]
50	39.75 [1.565]	38.15 [1.502]	30.48 [1.200]
60	46.10 [1.815]	44.50 [1.752]	36.83 [1.450]
68	51.18 [2.015]	49.58 [1.952]	41.91 [1.650]
80	58.80 [2.315]	57.20 [2.252]	49.53 [1.950]
100	71.50 [2.815]	69.90 [2.752]	62.23 [2.450]

TOLERANCE	DRAWER	GOOD
.0 ± .0.30 [0.012]	CHECK	
.00 ± 0.20 [0.008]	APP'D	
.0000 ± .XXX	PRODUCT SPEC.	
.0000 ± .	NAME	BOX HEADER
ANG. = ± 3°	DRAW NO.	DIP 1.27X2.54mm
UNITS : mm [inch]	SHEET	REV. A
SCALE NONE A4	1 OF 1	