


$0.38+1.27 \times \text{NO. OF POSITIONS} \pm 0.15$

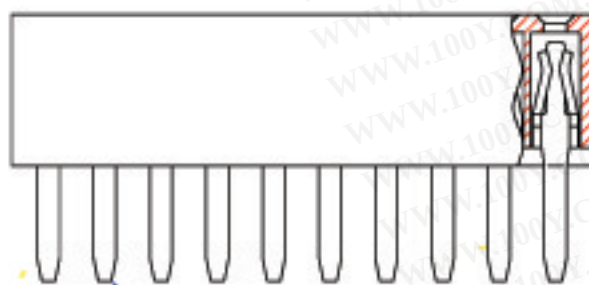

PIN 0.5x0.2

$-1.27 \times \text{NO. OF CONTACTS} - 1.27$

3.4 ± 0.2


2.6 ± 0.2

1.27 ± 0.05

3.0 ± 0.1



1.27 ± 0.05

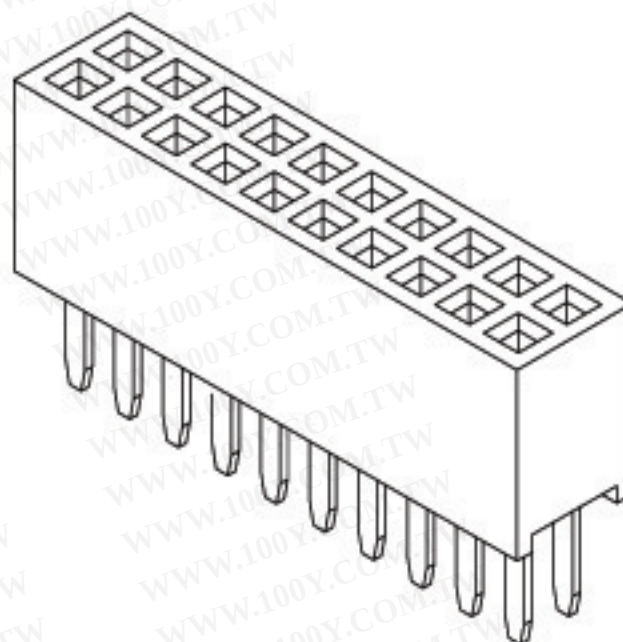

SPECIFICATIONS

ELECTRICAL

- Contact Current Rating : 1 Amps
- Contact Resistance : $20m\Omega$ Max
- Insulator Resistance : $1,000M\Omega$ Min
- Dielectric Withstanding Voltage : 500VAC 60Seconds

MATERIAL

- Insulator : LCP
- Contact : Copper Alloy
- Contact Plating : Gold Plated, Tin Plated, Selective Plated
- Operation Temperature : -40°C to $+105^{\circ}\text{C}$

UNIT: mm

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

繪圖 DRAWN BY
FUFU
 檢對 CHECKED BY
WENDY

日期 DATE
2017/12/06
 比例 SCALE
1:1

HHFPS2XXGB1H03

圖號 886-XX-H03
 DRAWING NO.