

PLT Series

圓型連接器

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ORDERING INFORMATION

- PLT-162-P**
- CONNECTOR TYPE 連接器類型
 - NO. OF CONTACTS(2-37) 導梢數量
 - SHELL SIZE(16,18,19,25,30,32,40,50) 外殼尺寸
 - NAME OF SERIES 系列名稱


P	Plug	插頭	AD	Adapter	中繼
R	Receptacle	插座	Ca	Cap	保護蓋
F	Female	導梢	RT	Rubber tube	橡膠管
M	Male	導針	G	Conduit type	軟管

MATERIAL & FINISH


Kindly instruct material & finish by below types when ordering

Description	Material	Finish
Shell/外殼、本體	<ul style="list-style-type: none"> Stainless/不鏽鋼 Zinc Die-Casting/鋅合金壓鑄 Aluminum alloy/鋁合金壓鑄 	<ul style="list-style-type: none"> Chrome-plated/鎳電鍍 Gold-plated/金電鍍 Nickel-plated/鎳電鍍 Silver-plated/銀電鍍
Insulator/絕緣體	<ul style="list-style-type: none"> Bakelite/電木 Delrin/塑鋼 Teflon Polyethylene/鐵氟龍 	
Contact/接觸體	<ul style="list-style-type: none"> Brass/銅 P.Brass/磷銅 B.Brass/鈹銅 	<ul style="list-style-type: none"> Gold-plated/金電鍍 Nickel-plated/鎳電鍍 Silver-plated/銀電鍍

INPUT TYPE
OUTPUT TYPE

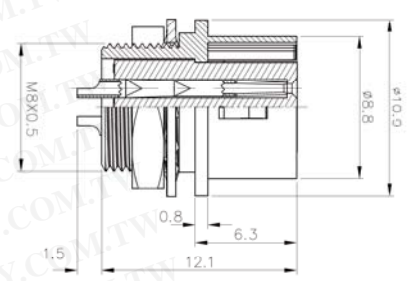

PLT-8-RF-R

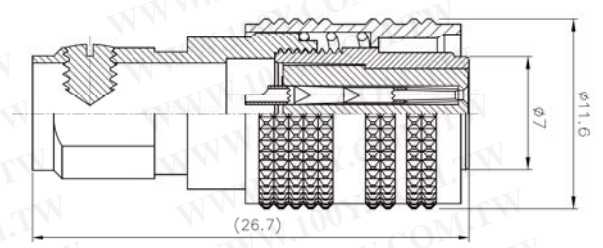


PLT-8-PF-R


ACCESSORY:

Cable Clamp W-017BH

Rubber Pipe

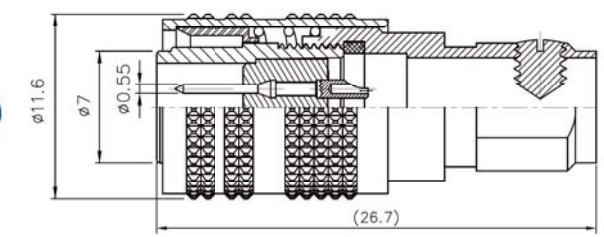

PLT-8-PM-R

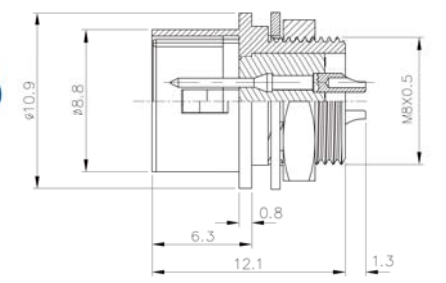

PLT-8-RM-R

No. of contacts	4	5	6				
Contacts Configuration							
Rated current / voltage	1A 300V	1A 300V	1A 300V				
Operation limit voltage (AC.V.rms)	125	125	125				
Withstanding voltage (AC.V.rms) 1 minute	300	300	300				
Insulation resistance (MΩ MIN.) at DC 500V	1000	1000	1000				
Contact resistance (mΩ MAX.) at DC 1A	10	10	10				

Circular Connectors