


## Blade Terminals

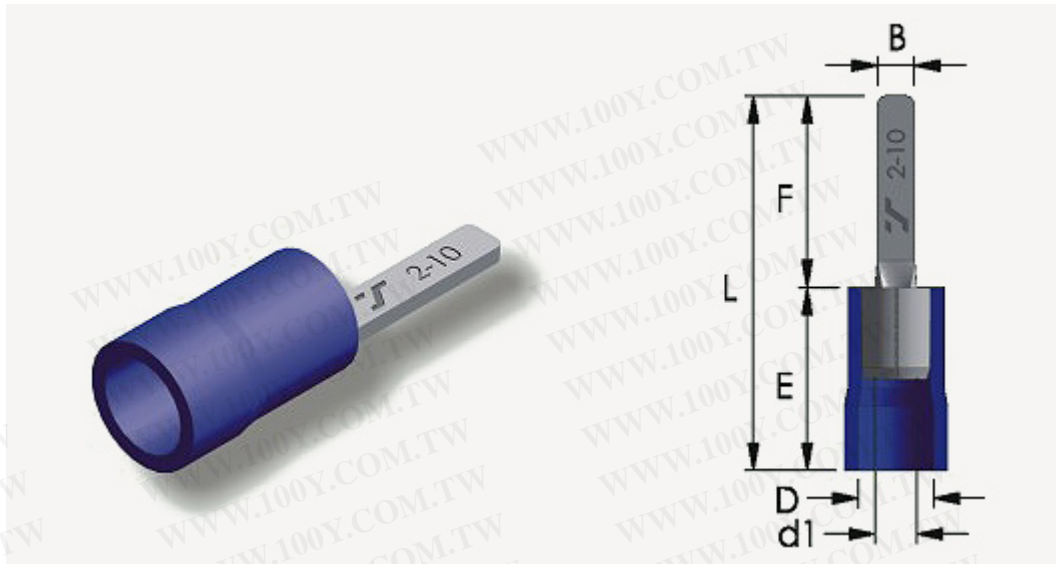

### PVC INSULATED BLADE TERMINALS

#### Feature:

1. MAXIMUM ELECTRICAL RATING: 600 VOLTS
2. MAXIMUM TEMPERATURE: 75 °C
3. TERMINAL MATERIAL: COPPER
4. PLATING: ELECTRO TIN PLATED
5. INSULATION MATERIAL: VINYL (PVC)

#### Specification:

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

WIRE RANGE AWG / mm <sup>2</sup>	ITEM NO.	DIMENSIONS inch (mm)					
		B	L	F	E	D	d1
22~16 AWG 0.5~1.5 mm <sup>2</sup>	BT1-10V	.094 (2.4)	.807 (20.5)	.413 (10.5)	.394 (10.0)	.161 (4.1)	.067 (1.7)
	BT1-11V	.118 (3.0)	.827 (21.0)	.433 (11.0)			
	BT1-14V		.945 (24.0)	.551 (14.0)			
	BT1-18V		.094 (2.4)	1.102 (28.0)			
16~14 AWG 1.5~2.5 mm <sup>2</sup>	BT2-9V	.110 (2.8)	.748 (19.0)	.345 (9.0)	.394 (10.0)	.177 (4.5)	.091 (2.3)
	BT2-10V	.094 (2.4)	.807 (20.5)	.413 (10.5)			
	BT2-13V		.906 (23.0)	.512 (13.0)			
	BT2-18V		1.102 (28.0)	.707 (18.0)			
12~10 AWG 4~6 mm <sup>2</sup>	BT5-10V	.110 (2.8)	.906 (23.0)	.413 (10.5)	.492 (12.5)	.256 (6.5)	.134 (3.4)
	BT5-18V	.118 (3.0)	1.201 (30.5)	.707 (18.0)			