





DINKLE ENTERPRISE

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

DIN Rail terminal blocks / GK series

GK2.5

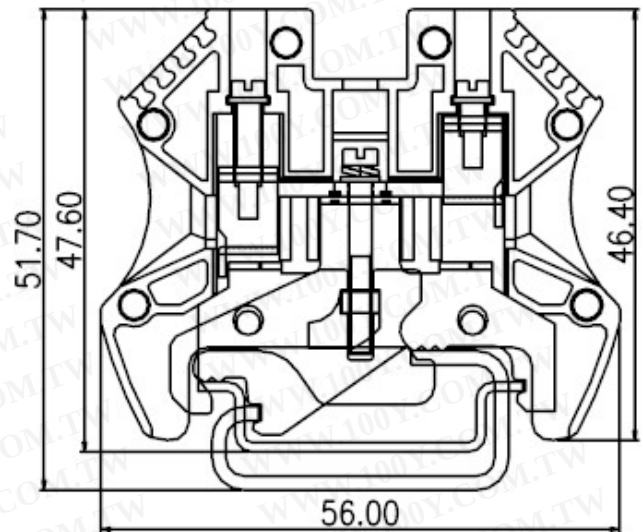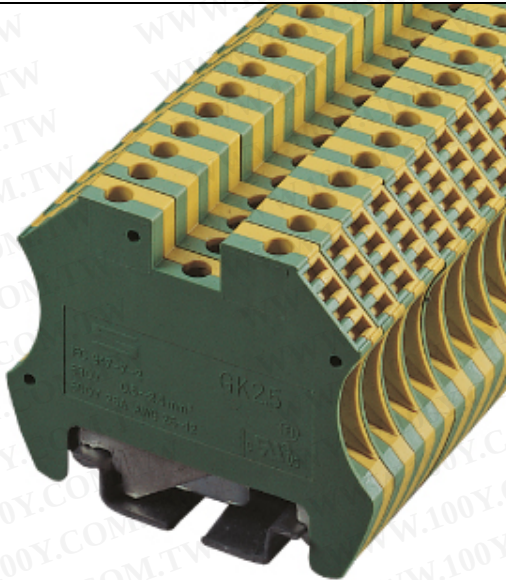

TxHxW(+0.2mm) 5.7x46.4x56

Approval	  	
Technical Data	UL	IEC
Rated voltage		630V
Rated current	25A	24A
Wire range		
Solid wire (AWG mm ²)	26~12	0.5~2.5
Stranded wire (AWG mm ²)	26~12	0.5~2.5
Rated surge voltage (UL/IEC/Max.)	2.2 / 2.5 / 8 KV	
Torque (Lb-in)	6.9	
Screw	M3	
Wire strip length	10~14mm	