


FILE 0103\DT-45-A03W-XX

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Normal Geometric Tolerancing			
—	//	≡	⊥
0 to 100	0.2		0 to 10
over 100 to 150	0.3	0.3	over 10
over 150	0.5		0.3
Total Pitch Tolerances		Normal dimension Tolerances	
0<U<=30	±0.20	0~30	±0.25
30<U<=53	±0.25	over 30~53	±0.30
53<U<=70	±0.30	over 53~70	±0.35
70<U<=90	±0.35	over 70~90	±0.44
90<U<=115	±0.44	over 90~115	±0.55
115<U<=150	±0.55	over 115~150	±0.70
150<U<=200	±0.70	over 150~200	±0.85
200<U<=250	±0.85	over 200~250	±1.00
250<U<=320	±1.00	over 250~320	±1.20

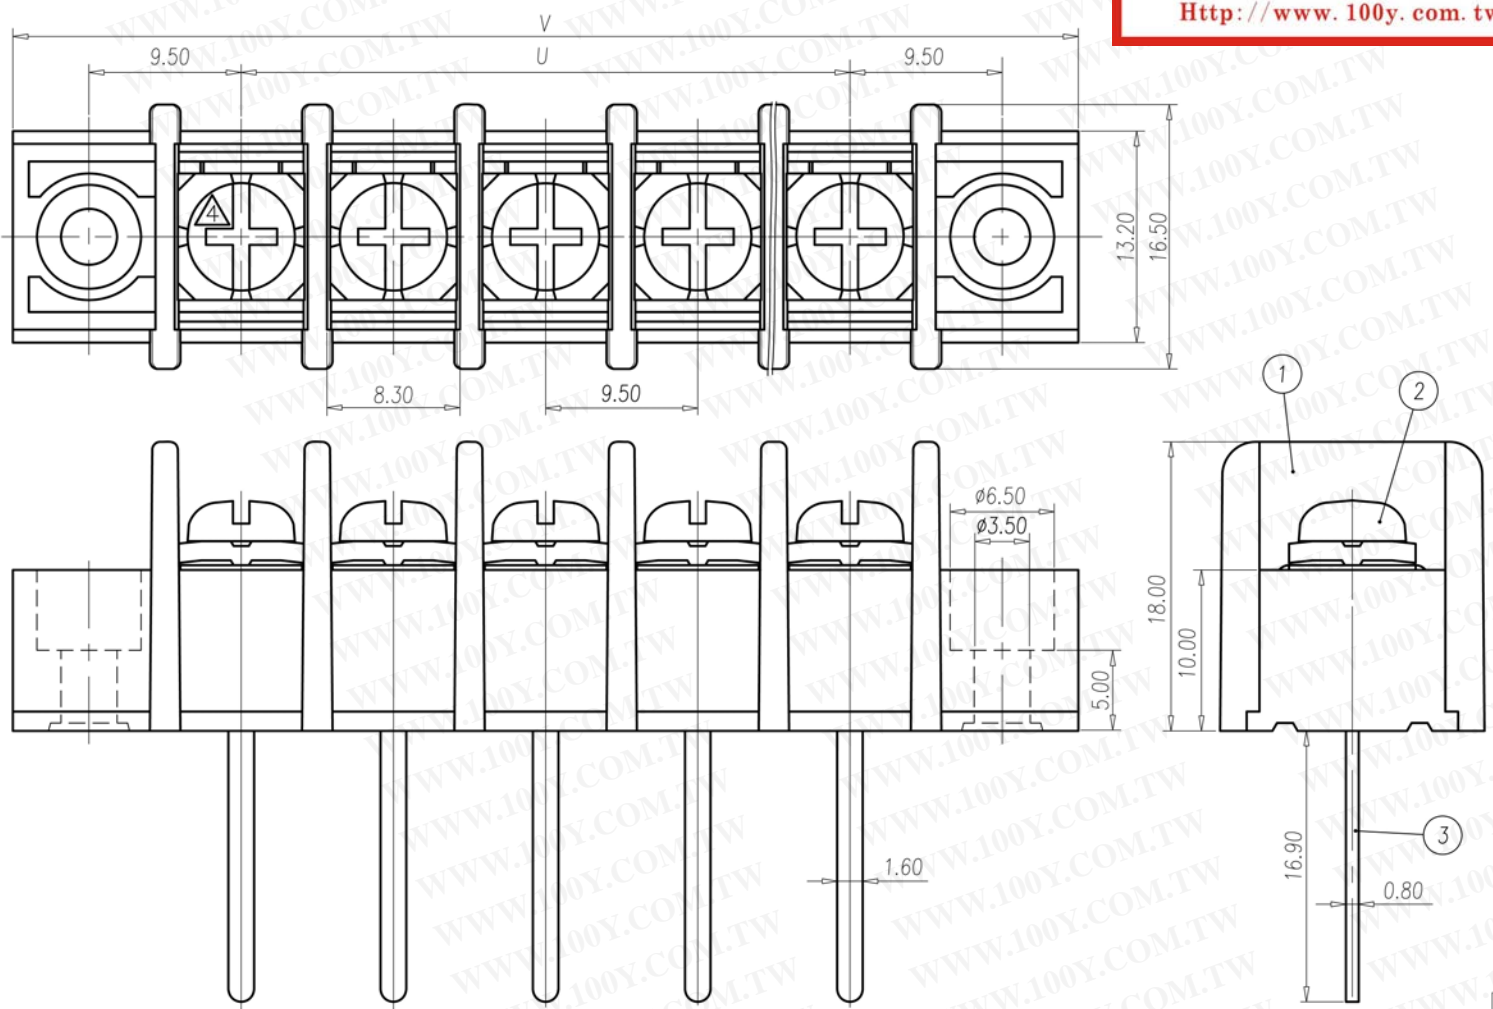

- NOTES:
- Rating: 300V 25A
PITCH: 9.50mm
 - Insulation Withstands Voltage:
AC 2000V/MIN
 - Insulation Resistance:
500MΩ or more at DC500V
 - Using Temperature Range:
-40°C~+105°C
 - Screw Torque Value: 10kg-cm
 - Suitable Electric Wire: AWG 22~12
 - RoHS compliance

P	2	3	4	5	6	7	8	9	10	11	12	13	14
U	9.5	19.0	28.5	38.0	47.5	57.0	66.5	76.0	85.5	95.0	104.5	114.0	123.5
V	38.0	47.5	57.0	66.5	76.0	85.5	95.0	104.5	114.0	123.5	133.0	142.5	152.0
P	15	16	17	18	19	20	21	22	23	24	25	26	
U	133.0	142.5	152.0	161.5	171.0	180.5	190.0	199.5	209.0	218.5	228.0	237.5	
V	161.5	171.0	180.5	190.0	199.5	209.0	218.5	228.0	237.5	247.0	256.5	266.0	

3	SOLDER PIN	COPPER ALLOY	Tin Plated
2	SCREW	STEEL	M3.5/Ni Plated
1	HOUSING	PA66	UL94-V0 BLACK
ITEM	NAME OF PART	MATERIAL	NOTES

DWG.	MXB	DATE	10.05.14	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	3:1 (:)		
APP.		DATE		NAME	DT-45-A03W-XX		
REV.		DATE		DWG NO.	SP-03-DT45A03W		

REV.	CONTENT	CHK.	DATE