


VINYL-INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

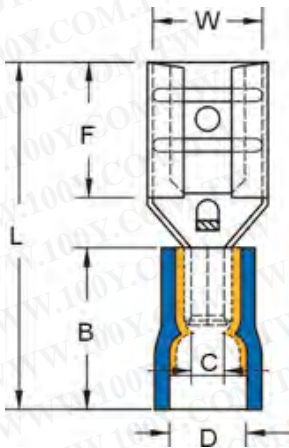

MAXIMUM ELECTRIC CURRENT:

AWG.	22	20	18	16	14	12	10
AMP.	3	4	7	10	15	20	24

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

INSULATION MATERIAL: VINYL

INSULATION COLOR:

22-16A.W.G.:RED 16-14A.W.G.:BLUE

12-10A.W.G.:YELLOW

DOUBLE CRIMP: WITH COPPER SLEEVE ON BARREL

TERMINAL MATERIAL : BRASS

TERMINAL BARREL I.D.:

16-14A.W.G.:2.3mm

12-10A.W.G.:3.4mm

WIRE RANGE A.W.G. mm ²	ITEM NO.	NEMA TAB	DIMENSION inch(mm)						Q'TY BOX
			W	F	L	B	D	T	
22-16 A.W.G.	<input type="checkbox"/> FDD1-110(5)	.020X.110 (0.5X2.8)	0.126 3.2	0.256 6.5	0.748 19	0.413 10.5	0.157 4.000	0.012 0.3	1000
	<input type="checkbox"/> FDD1-110(8)	.032X.110 (0.8X2.8)	0.126 3.2	0.256 6.5	0.748 19	0.413 10.5	0.157 4.000	0.012 0.3	1000
	<input type="checkbox"/> FDD1-187(5)	.020X.187 (0.5X4.75)	0.197 5	0.252 6.4	0.764 19.4	0.413 10.5	0.157 4.000	0.014 0.35	1000
	<input type="checkbox"/> FDD1-187(8)	.032X.187 (0.8X4.75)	0.197 5	0.252 6.4	0.764 19.4	0.413 10.5	0.157 4.000	0.014 0.35	1000
0.5-1.5 mm ²	<input type="checkbox"/> FDD1-205(5)	.020X.205 (0.5X5.2)	0.224 5.7	0.228 5.8	0.76 19.3	0.413 10.5	0.157 4.000	0.014 0.35	1000
	<input type="checkbox"/> FDD1-205(8)	.032X.205 (0.8X5.2)	0.224 5.7	0.228 5.8	0.76 19.3	0.413 10.5	0.157 4.000	0.014 0.35	1000
	<input type="checkbox"/> FDD1-250	.032X.250 (0.8X6.35)	0.26 6.6	0.295 7.5	0.819 20.8	0.413 10.5	0.157 4.000	0.016 0.4	1000
	<input type="checkbox"/> FDD1-312	.032X.315 (0.8X8.0)	0.323 8.2	0.394 10	0.965 24.5	0.413 10.5	0.157 4.000	0.016 0.4	1000