


VINYL-INSULATED LOCKING SPADE TERMINALS

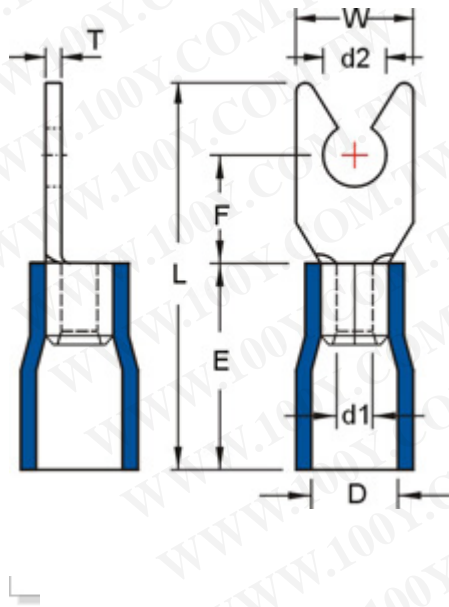

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MAXIMUM ELECTRIC CURRENT:

A. W. G.	22	20	18	16	14	12	10
AMP.	9	12	17	18	30	35	50

MAXIMUM ELECTRICAL RATING: 105° C 600 VOLTS MAX.

INSULATION MATERIAL: VINYL

INSULATION COLOR:

22-16A. W. G. : RED 16-14A. W. G. : BLUE

12-10A. W. G. : YELLOW

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE	DIMENSION inch(mm)								Q'TY BOX
	BRAZED SEAM	BUTTED SEAM		d2	W	F	L	E	D	d1	T	
22-16 A.W.G. 0.5-1.5 mm ²	<input type="checkbox"/> LSVB1-3.7	<input type="checkbox"/> LSV1-3.7	#6	0.146 3.7	0.252 6.4	0.256 6.5	0.827 21	0.394 10	0.157 4.000	0.067 1.7	0.03 0.75	1000
	<input type="checkbox"/> LSVBS1-4	<input type="checkbox"/> LSVS1-4	#8	0.169 4.3	0.283 7.2	0.256 6.5	0.827 21	0.394 10	0.157 4.000	0.067 1.7	0.03 0.75	1000
	<input type="checkbox"/> LSVBL1-4	<input type="checkbox"/> LSVL1-4	#8	0.169 4.3	0.319 8.1	0.256 6.5	0.827 21	0.394 10	0.157 4.000	0.067 1.7	0.03 0.75	1000
	<input type="checkbox"/> LSVBS1-5	<input type="checkbox"/> LSVS1-5	#10	0.209 5.3	0.319 8.1	0.256 6.5	0.827 21	0.394 10	0.157 4.000	0.067 1.7	0.03 0.75	1000
	<input type="checkbox"/> LSVBL1-5	<input type="checkbox"/> LSVL1-5	#10	0.209 5.3	0.374 9.5	0.256 6.5	0.827 21	0.394 10	0.157 4.000	0.067 1.7	0.03 0.75	1000
16-14 A.W.G. 1.5-2.5 mm ²	<input type="checkbox"/> LSVB2-3.7	<input type="checkbox"/> LSV2-3.7	#6	0.146 3.7	0.236 6	0.256 6.5	0.827 21	0.394 10	0.177 4.500	0.091 2.3	0.31 0.8	1000
	<input type="checkbox"/> LSVB2-4	<input type="checkbox"/> LSV2-4	#8	0.169 4.3	0.283 7.2	0.256 6.5	0.827 21	0.394 10	0.177 4.500	0.091 2.3	0.31 0.8	1000
	<input type="checkbox"/> LSVBL2-4	<input type="checkbox"/> LSVL2-4	#8	0.169 4.3	0.319 8.1	0.256 6.5	0.827 21	0.394 10	0.177 4.500	0.091 2.3	0.31 0.8	1000
	<input type="checkbox"/> LSVBS2-5	<input type="checkbox"/> LSVS2-5	#10	0.209 5.3	0.319 8.1	0.256 6.5	0.827 21	0.394 10	0.177 4.500	0.091 2.3	0.31 0.8	1000
	<input type="checkbox"/> LSVBL2-5	<input type="checkbox"/> LSVL2-5	#10	0.209 5.3	0.366 9.3	0.256 6.5	0.827 21	0.394 10	0.177 4.500	0.091 2.3	0.31 0.8	1000
12-10 A.W.G. 4-6 mm ²	<input type="checkbox"/> LSVB5-3.7	<input type="checkbox"/> LSV5-3.7	#6	0.146 3.7	0.327 8.3	0.276 7	0.992 25.2	0.512 13	0.252 6.400	0.134 3.4	0.039 1	500
	<input type="checkbox"/> LSVB5-4	<input type="checkbox"/> LSV5-4	#8	0.169 4.3	0.327 8.3	0.276 7	0.992 25.2	0.512 13	0.252 6.400	0.134 3.4	0.039 1	500
	<input type="checkbox"/> LSVB5-5	<input type="checkbox"/> LSV5-5	#10	0.209 5.3	0.354 9	0.276 7	0.992 25.2	0.512 13	0.252 6.400	0.134 3.4	0.039 1	500
	<input type="checkbox"/> LSVB5-6	<input type="checkbox"/> LSV5-6	1/4	0.252 6.4	0.472 12	0.472 12	1.24 31.5	0.512 13	0.252 6.400	0.134 3.4	0.039 1	500