

VINYL-INSULATED RING TERMINALS

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16	14	12	10	8	6	4	2
AMP.	9	12	17	18	30	35	50	70	95	125	170

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS
MAX.

INSULATION MATERIAL: VINYL

INSULATION COLOR:

22-16A.W.G.: RED 16-14A.W.G.: BLUE




14-12A.W.G.: BLACK 12-10A.W.G.: YELLOW



8A.W.G.: RED 6A.W.G.: BLUE

4A.W.G.: YELLOW 2A.W.G.: RED

TERMINAL MATERIAL: COPPER

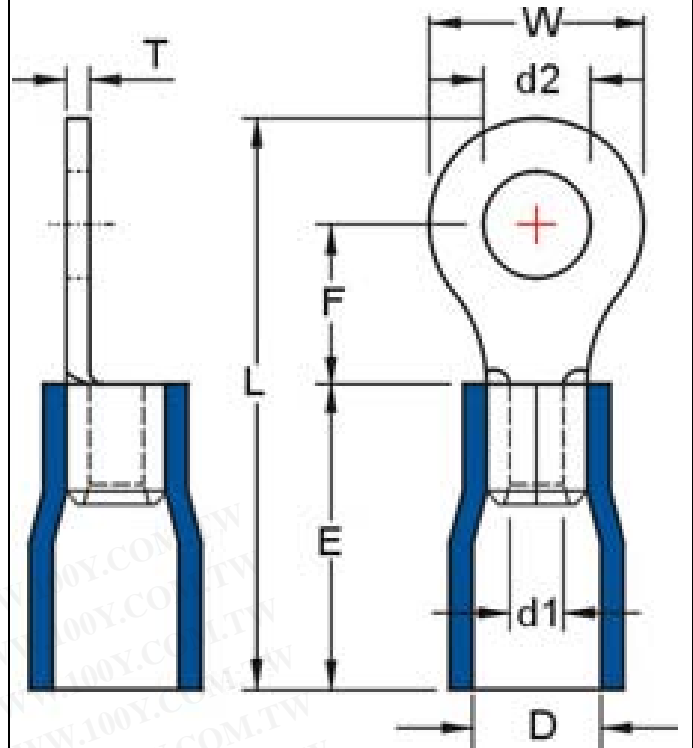

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION inch(mm)		Q'TY BOX
	BRAZED SEAM	BUTTED SEAM	d2		W		
22-16 A.W.G. 0.5-1.5 mm ²	RVB1-2.5	RV1-2.5	#2	0.095 2.4	0.217 5.50		1000
	RVB1-3.2	RV1-3.2	#4	0.126 3.2	0.217 5.50		1000
	RVBS1-3.7	RVS1-3.7	#6	0.146 3.7	0.217 5.50		1000
	RVBM1-3.7	RVM1-3.7	#6	0.146 3.7	0.260 6.60		1000
	RVBL1-3.7	RVL1-3.7	#6	0.146 3.7	0.315 8.00		1000
	RVBS1-4	RVS1-4	#8	0.169 4.3	0.260 6.60		1000
	RVBL1-4	RVL1-4	#8	0.169 4.3	0.315 8.00		1000
	RVB1-5	RV1-5	#10	0.209 5.3	0.315 8.00		1000
	RVBL1-5	RVL1-5	#10	0.209 5.3	0.457 11.60		1000
	RVB1-6	RV1-6	1/4	0.252 6.4	0.457 11.60		1000
	RVB1-8	RV1-8	5/16	0.331 8.4	0.457 11.60		1000
	RVB1-7	RV1-7	5/16	0.291 7.4	0.457 11.60		1000
	RVBL1-10	RVL1-10	3/8	0.413 10.5	0.756 19.20		1000
	RVB1-10	RV1-10	3/8	0.413 10.5	0.535 13.60		1000
	RVB1-12	RV1-12	1/2	0.512 13	0.756 19.20		1000
	RVB1-14	RV1-14	9/16	0.591 13	1.063 27.00		1000
RVB1-16	RV1-16	5/8	0.669 17	1.063 27.00		1000	