

Plugs SLQ-4... SLM-4...


Stackable, Ø 4 mm, with spring-loaded MULTILAM, for self-assembly of test leads.
With rigid insulating sleeve.

Various types of connection:

SLM-4...: Screw connection

SLQ-4...: Cross hole for solder connection

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

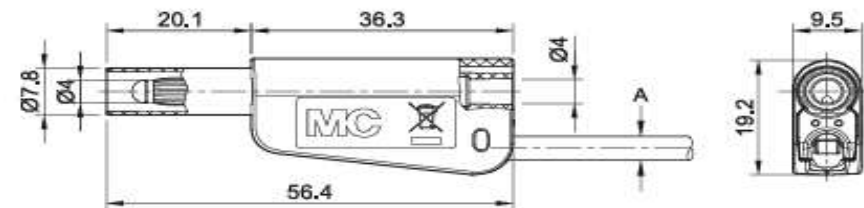

Order No.	Type	Rated voltage/current	Lead (A)		*Standard colors
66.2018-*	SLQ-4N-39	1000 V, CAT II/19 A 600 V, CAT III/19 A	PVC SIL Ø 3.9 mm Ø 3.9 mm 1.0 mm²	Ni	20 21 22 23 24 25 26 27 28 29 30
66.2019-*	SLQ-4A-39			Au	
66.2020-*	SLM-4N-39			Ni	
66.2021-*	SLM-4A-39			Au	
66.2022-*	SLQ-4N-46	1000 V, CAT II/32 A 600 V, CAT III/32 A	PVC SIL Ø 3.9 mm Ø 4.6 mm 2.5 mm²	Ni	20 21 22 23 24 25 26 27 28 29 30
66.2023-*	SLQ-4A-46			Au	
66.2024-*	SLM-4N-46			Ni	
66.2025-*	SLM-4A-46			Au	