


勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

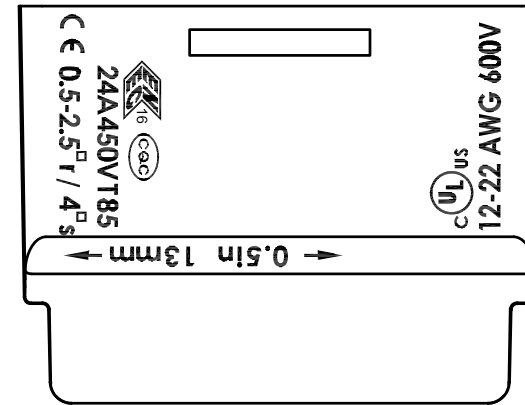

ALL DIMENSION IN MM UNLESS OTHERWISE STATED : 0.= ±0.2mm 00.= ±0.4mm

Housing Material : Polycarbonate (PC), flame-retardant to UL 94-V2

Terminal Insert : (1) Tin-bonded copper
(2) Spring plate: Steel

Current : 32A (IEC), 24A (IEC/CQC)

Voltage : 450V (IEC/CQC), 600V (UL)

Working Temperature : T85 (IEC/CQC), 105° C (UL)

Stripping Length : 9.5 ~ 13 mm (0.375 ~ 0.5 inch)

Wire Range : 0.5-4.0mm² Sol. (IEC) / 0.5-2.5mm² Rigid Str. (IEC/CQC)

22-12AWG, Sol Cu / 20-12AWG, Str Cu / 22-14AWG, Tin-bonded Str Cu (UL)

TITLE :

PUSH-IN WIRE CONNECTORS

Model No. PC335

Part No. PC335

International Approvals

cULus, CE, FIMKO, ENEC, CQC