


T-040 CONTACT PROBE SERIES

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

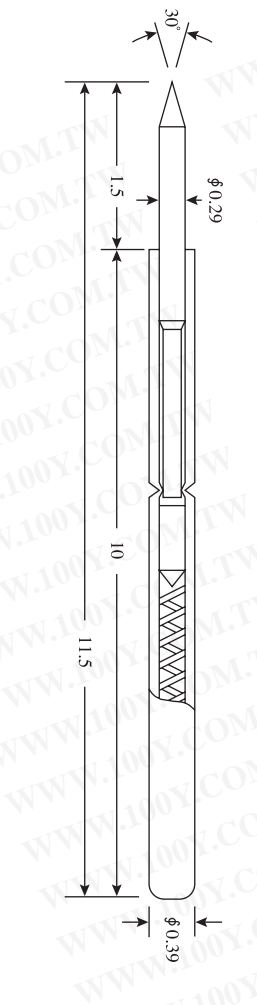

最小間距 (Recommended Min Center)	0.75m/m
彈簧壓力 (Spring Force)	45g(2/3travel)
行程 (Work Travel)	1.5mm
鑽孔尺寸 (Drill Size)	0.57mm
材質 (Materials)	針軸(Plunger) : SK4鍍銠(High Carbon Steel, Rhodium plated) 內管(Barrel) : 白銅, 鍍金(Nickel Silver, Gold plated) 彈簧(Spring) : 琴鋼線, 鍍金(Music wire, Gold plated) 套管(Receptacle) : 白銅, 鍍金(Nickel Silver, Gold plated)
額定電流 (Current Rating)	0.5A
接觸電流 (Contact Resistance)	50mΩ

單位 : m/m DIMENSION IN MILLIMETER

