


T-2 BARE BOARD PROBE

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

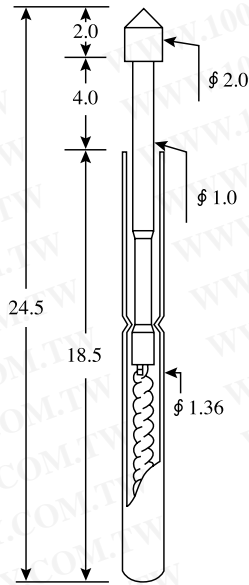


最小間距 (RECOMMENDED MIN CENTER)	2.54m/m
鑽孔尺寸 (MOUNTING HOLE SIZE)	1.7;1.75m/m
材質 (MATERIALS)	PLUNGER:RH.PLATED BE CU BARREL:AU.PLATED BRASS
行程 (FULL TRAVEL)	2.54 ; 3.0m/m 3.5 ; 4.0m/m
全壓彈力 (SPRING PRESSURE)	150g
額定電流 (CURRENT RATING)	3A
接觸電阻 (CONTACT RESISTANCE)	50 mΩ


單位m/m DIMENSION IN MILLIMETER

★ : 訂製品


T2-1.0A




T2-1.0B




T2-1.0D




T2-1.0F(0.5)




T2-1.0F(直爪)




T2-1.0G




T2-1.3DS




T2-1.5DS




T2-1.5ES




T2-1.5F




T2-1.5G




T2-1.5H




T2-1.5K




T2-1.5T




T2-1.8A




★T2-1.8AS




T2-1.8DS




T2-1.8ES




★T2-1.8ESG



T2-1.8G



T-2 BARE BOARD PROBE

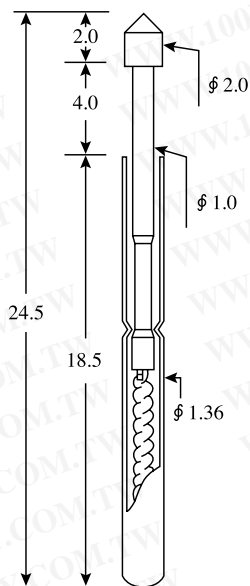


最小間距(RECOMMENDED MIN CENTER)	2.54m/m
鑽孔尺寸(MOUNTING HOLE SIZE)	1.7;1.75m/m
材質(MATERIALS)	PLUNGER:RH.PLATED BE CU BARREL:AU.PLATED BRASS
行程(FULL TRAVEL)	2.54 ; 3.0m/m 3.5 ; 4.0m/m
全壓彈力(SPRING PRESSURE)	150g
額定電流(CURRENT RATING)	3A
接觸電阻(CONTACT RESISTANCE)	50 mΩ


單位:m/m DIMENSION IN MILLIMETER

★ : 訂製品


T2-1.8H




T2-1.8K




T2-1.8T




T2-2.0ES




T2-2.0K




★T2-2.5D




T2-2.5ES




T2-2.5ESG




T2-2.5K




T2-3.0ES




T2-3.0ESG




T2-3.0K




T2-4.0ES




T2-4.0ESG




T2-4.0K



T2-1.5HL



T2-2.5HL




2# PRECISION RECEPTACLES

最小間距 (RECOMMENDED MIN CENTER)	2.54m/m
鑽孔尺寸 (MOUNTING HOLE SIZE)	1.7;1.75m/m
材質 (MATERIALS)	GOLD PLATED BRASS
接線形式(connections): 壓接.....PRESS :2VC 2W1C 2W2C 銲接.....SOLDER :2VS 2W1S 2W2S 繞線.....WIRE WRAP :2V-2 2W1-2 2W2-2	


單位m/m DIMENSION IN MILLIMETER

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


R-2VC

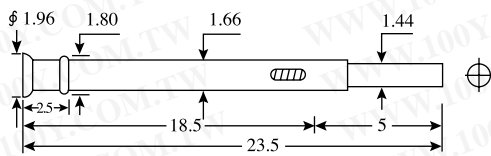


R-2V-1

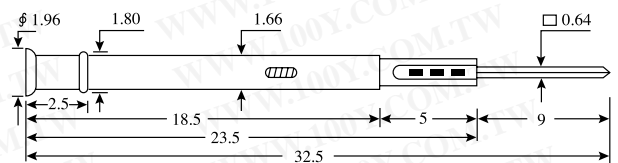


R-2VS

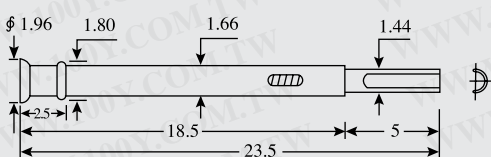


R-2W1-1

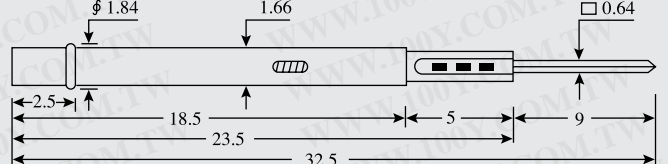


R-2W1C

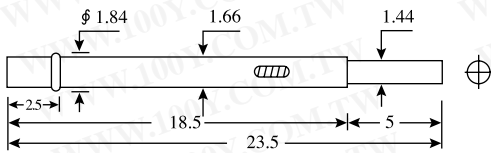


R-2W2-1

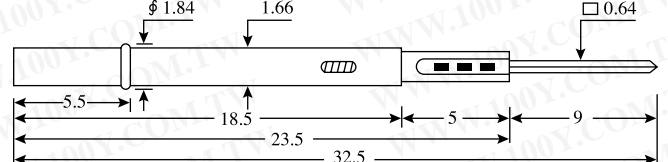


R-2W1S

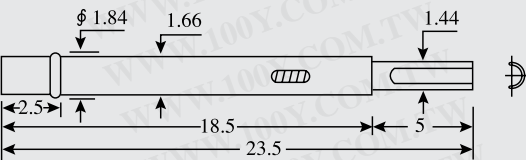


R-2V-2

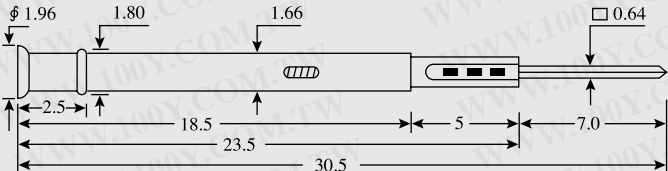


R-2W2C

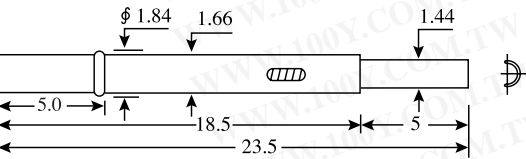

R-2W1-2

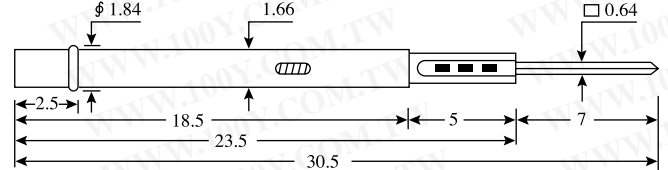

R-2W2S

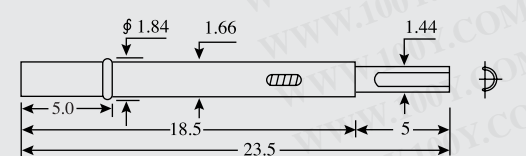

R-2W2-2

