


SIGN	DATE	DESCRIPTION	APPROVER
△	5/28/03	Dimension changed from 4.2 to 4.5	DAWN
△	2/04/06	Part No. changed	Tony

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!

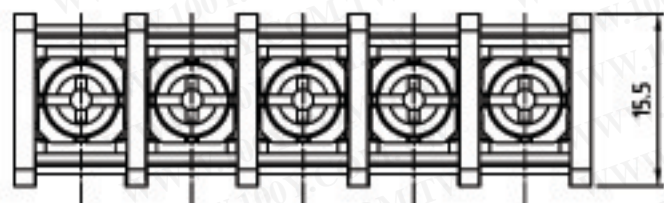

**MATERIALS ELECTRICAL**  
**RATED VOLTAGE & CURRENT:** 300 V, 25 A  
**WITHSTAND VOLTAGE:** AC 2000 V/Min  
**INSULATION RESISTANCE:** 1000 MΩ OR MORE AT DC 500 V  
**OPERATING TEMPERATURE RANG:** -40 °C ~ +105 °C  
**SCREW TORQUE VALUE:** 8.8 Lb-in.  
**WIRE RANGE:** 22 - 12 AWG  
**1) MOLDED PARTS:** POLYIMIDE 66, UL 94 V-0 BLACK  
**2) TERMINAL:** BRASS, 0.01, Tin PLATED  
**3) TERMINAL SCREWS:** STEEL, Ni PLATED, M3.5

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

APPROVAL:

△ PART NO.:

YK 612 xx 0 x x 00G

G: Pb<40000ppm

NO. OF POLES

02: 2 POLES  
 03: 3 POLES  
 04: 4 POLES



30: 30 POLES

MARK

0: "@" MARK  
 1: "ANY" MARK

TERMINAL & SCREW PLATED

0: TERMINAL & SCREW: G/F  
 1: TERMINAL: G/F, SCREW: Ni  
 2: TERMINAL: Sn, SCREW: G/F  
 3: TERMINAL: Sn, SCREW: Ni

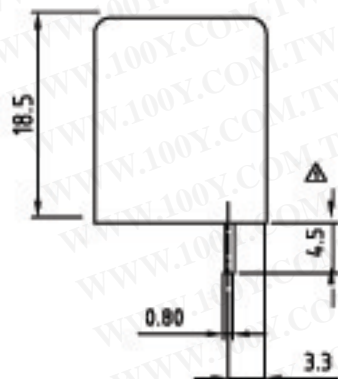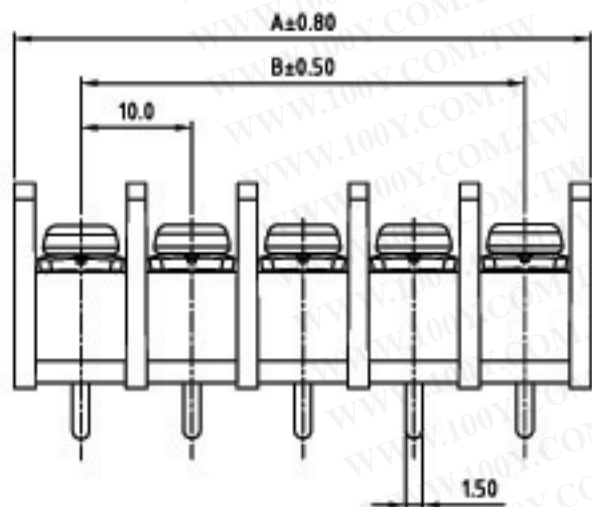

POLE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A		22.00	32.00	42.00	52.00	62.00	72.00	82.00	92.00	102.00	112.00	122.00	132.00	142.00	152.00	162.00
B		18.00	28.00	38.00	48.00	58.00	68.00	78.00	88.00	98.00	108.00	118.00	128.00	138.00	148.00	158.00
POLE	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A	172.00	182.00	192.00	202.00	212.00	222.00	232.00	242.00	252.00	262.00	272.00	282.00	292.00	302.00	312.00	322.00
B	160.00	170.00	180.00	190.00	200.00	210.00	220.00	230.00	240.00	250.00	260.00	270.00	280.00	290.00	300.00	310.00

**ANYTEK**

TITLE		YK-612 W/D Flange Series	
PART NO.	YK612xx0xx00G	DWG NO.	8YK0001-612
APPROVED	CHECKED	DESIGNED	DRAWN
		Tony 2006.02.04	Tony 2006.02.04
SHEET: 01/01		UNIT: mm	Tolerance
		SCALE: NONE	X. ±0.50
		REV: C	X.X ±0.30
			X.XX ±0.10
			X* ±1*