

HSB矩形重载连接器

4/6/12芯侧出/顶出重载 35A航空插



The high protection level provided by heavy-duty connectors has incomparable advantages over equipment connection systems in protection in harsh environment. The high protection level such as dust, rain, cold, ice and snow, oil pollution, etc. as well as oil pollution, etc. The high protection level (IP65, IP68) provided by heavy-duty connectors has incomparable advantages over equipment connection systems in harsh environments. Provide



IP65防护等级

在沙尘 雨水 冰雪 油污 等恶劣环境下提供有效保护



侧出型

顶出型



公接插体

例示：此款是6芯公接插体

■ ■ ■



母接插体

例示：此款是6芯母接插体

■ ■ ■



产品参数

各类数据都可一目了然

■ ■ ■

接插体		金属上壳/底座	
工作电流	35A	材料	铸铝合金
工作电压	500V	表面处理	高温粉末镀层
额定脉冲耐受电压	6KV	锁定装置	不锈钢或铁镀锌
污染等级	3	工作温度范围	-40°C~+125°C
隔离电阻	≥10Ω	防护等级	IP65
材料	Polycarbonate	接插件	
工作温度范围	-40°C~+125°C	材料	铜
阻燃等级 (据UL94)	V0	表面处理	镀银
据UL/CSA工作电压	500V	接触电阻	≤1Ω
接插针数	4/6/12芯	接线形式	螺钉接压
安装方式	开孔安装	螺钉拧紧力矩/测试力矩	0.25Nm

4芯系列产品尺寸

底部进线长66mm 开孔尺寸长83mm
底部进线宽35mm 开孔尺寸宽32mm




6芯系列产品尺寸


底部进线长86mm 开孔尺寸长103mm
底部进线宽35mm 开孔尺寸宽32mm



12芯系列产品尺寸

底部进线长103mm 开孔尺寸长110mm
底部进线宽66mm 开孔尺寸宽76mm

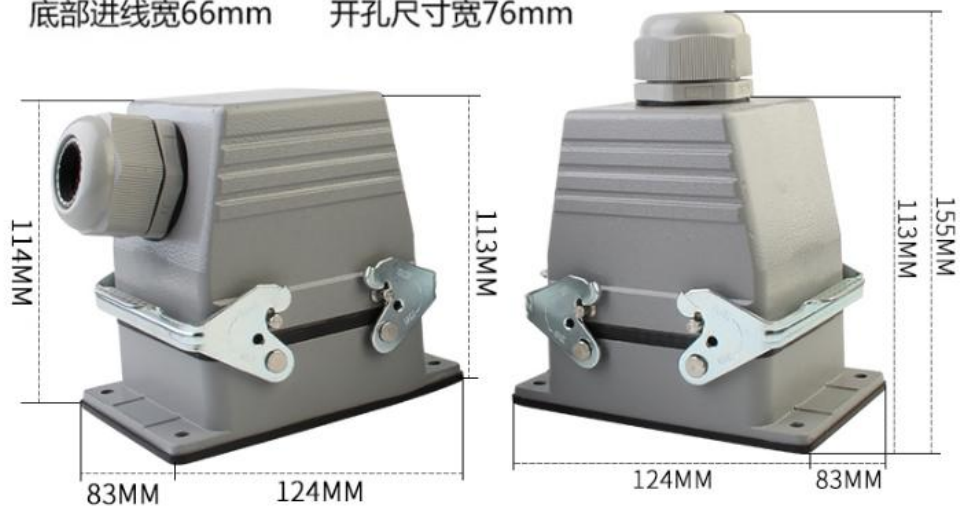

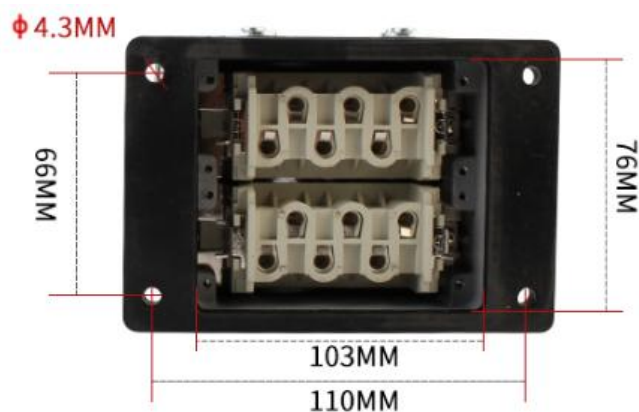

型号: PG29
螺纹外径: 37MM
适用电缆: 13-24MM

4芯重载连接器



4芯上壳



4芯下壳



4芯公插接体



4芯母插接体

6芯重载连接器



6芯上壳



6芯下壳



6芯公插接头



6芯母插接体

12芯重载连接器



12芯上壳



12芯下壳



12芯公插接头



12芯母插接体